

SAFETY SOLUTIONS



SECURITY SOLUTIONS

PRODUCT CATALOG

S T O R A G E S O L U T I O N S

800-622-2214 | 5858 West 73rd Street Bedford Park, IL 60638 | Email: sales@foldingguard.com

FoldingGuard.com









Since 1962, Folding Guard has provided customers with innovative safety, security, and storage products and personalized expert service.

Because our vertically integrated manufacturing processes provide seamless production from raw material to finished products, we can offer the highest quality, utmost reliability, and value.

Folding Guard also has more than 700 dealers providing national and international sales, installation service, and project coordination.

See our complete line of expertly engineered products at FoldingGuard.com or call us directly toll-free at 1-800-622-2214 and find out how Folding Guard can help make your business more safe and secure.



From Obsolete to Innovative: How Folding Guard Revitalized an Outdated Safety System

Folding Guard was contacted by one of North America's most respected manufacturers of automotive, packaging, aerospace, and industrial products. To make their facility more efficient and regulation-compliant, its machine-perimeter guarding systems required significant upgrades.

Folding Guard toured the facility and assessed the hazards and deficiencies. Detailed recommendations were then presented, and layouts of the proposed solutions were produced. Finally, customized machine-perimeter guarding was engineered to fulfill the unique requirements of this critical site.

Because of the state-of-the-art machine-perimeter guarding designed by Folding Guard, the facility is now more efficient and compliant with safety regulations.





Machine Guarding and Employee Safety Solutions



Prevent workplace accidents and costly fines

by protecting your machines and employees with welded wire safety guarding.

An industry standard for any workplace environment where machines and employees co-exist.










Saf-T-Fence® Machine Perimeter Guarding

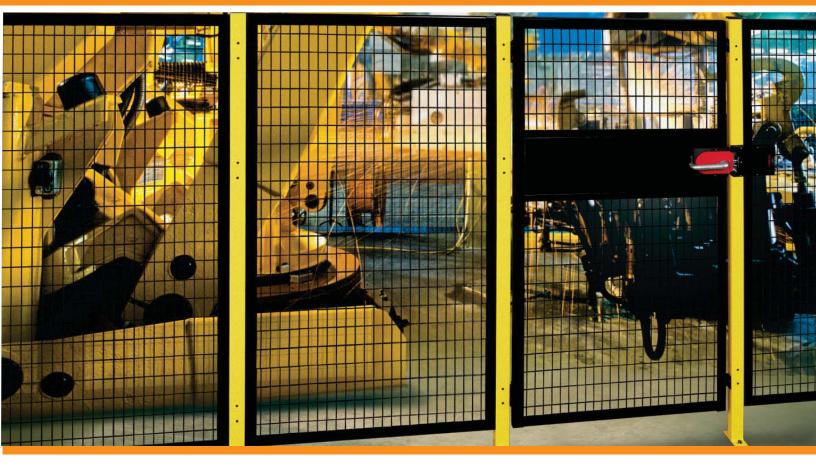



Protect your people better.

Guarding the machinery you build and/or use is virtually as important as building or using it. Saf-T-Fence® protects your staff, keeps morale high, lowers your cost of doing business by maintaining productivity while reducing downtime, and can help you meet OSHA and other safety regulations. And we can have it ready to ship within 3 days! Our modular system consists of three post heights, six styles of doors,

and over 30 pre-fabricated wire-mesh panel sizes and accessories (see reverse side). All pieces assemble and install precisely and easily. You'll enjoy worker safety, less downtime, compliance with federal safety regulations, and have fewer machine-guarding problems to solve.







Door Catch



Hasp (padlock not included)



All Major Brand Safety Interlock Switches Available



e- Hinge Door s Hydraulic Closure



Angle Panel Kit (post and panels sold separately)







Saf-T-Fence® Machine Perimeter Guarding

5'3"-HIGH SYSTEM

5'3"-high post, 58"-high panel, and 5'-high door with built-in door catch and pull handle.

| Posts | Width (in.) | Weight (lbs.) |
|------------------------|-------------|---------------|
| SAF-P63 | 2 | 10 |
| Panels | | |
| SAF-1058 | 10 | 12 |
| SAF-1658 | 16 | 15 |
| SAF-1958 | 19 | 16 |
| SAF-2258 | 22 | 16 |
| SAF-2858 | 28 | 19 |
| SAF-3458 | 34 | 21 |
| SAF-4658 | 46 | 26 |
| SAF-5858 | 58 | 28 |
| SAF-7058 | 70 | 34 |
| SAF-9458 | 94 | 44 |
| Hinge Door | | |
| SAF-H3458-SL | 34 | 25 |
| SAF-H4658-SL | 46 | 31 |
| Hinge Pair Door | | |
| SAF-HP7058-SL | 70 | 45 |
| SAF-HP9458-SL | 94 | 50 |
| Clear Access Slide Do | or | |
| SAF-SC7058-SL | 70 | 110 |
| Clear Access Slide Pai | ir Door | |
| SAF-SPC14258-SL | 118 | 155 |
| | | |

LOCKING OPTIONS

| | Н | HP | S | SP | SC | SPC |
|--|---|----|---|----|----|-----|
| Padlock Hasp | | | | | | |
| Snap Lock | | | | | | |
| Cylinder Lock | | | | | | |
| Keyed Alike Cylinders | | | | | | |
| Cylinder to Accept Interchangable Core | | | | | | |

Thumbturn Hydraulic Closer Pushbar Exit Device

Exit Button

| Deadlatch Paddle |
|--------------------------|
| Lever Handle |
| Knob Handle |
| Electric Strike |
| Magnetic Lock |
| Keypad Lock |
| Proximity Reader |
| Magstripe Card Reader |

| Safety Switch with Slide Bolt Actuator | | | |
|--|--|--|--|
| Locking Safety Switch with Slide Bolt Actuator | | | |

7'-HIGH SYSTEM

7'-high post, 82"-high panel, and 7'-high door with built-in door catch and pull handle.

| Posts | Width (In.) | Weight (lbs.) |
|-----------------------|---------------|---------------|
| SAF-P84 | 2 | 13 |
| Panels | | |
| SAF-1082 | 10 | 16 |
| SAF-1682 | 16 | 19 |
| SAF-1982 | 19 | 20 |
| SAF-2282 | 22 | 22 |
| SAF-2882 | 28 | 24 |
| SAF-3482 | 34 | 27 |
| SAF-4682 | 46 | 33 |
| SAF-5882 | 58 | 37 |
| Hinge Door (header i | ncluded) | |
| SAF-H3482-SL | 34 | 35 |
| SAF-H4682-SL | 46 | 44 |
| Hinge Pair Door (hea | der included) | |
| SAF-HP7082-SL | 70 | 85 |
| SAF-HP9482-SL | 94 | 101 |
| Slide Door | | |
| SAF-S3482-SL | 34 | 55 |
| SAF-S4682-SL | 46 | 65 |
| SAF-S5882-SL | 58 | 75 |
| SAF-S7082-SL | 70 | 85 |
| SAF-S9482-SL | 94 | 105 |
| Slide Pair Door | | |
| SAF-SP7082-SL | 70 | 155 |
| SAF-SP9482-SL | 94 | 175 |
| Clear Access Slide Do | or | |
| SAF-SC7082-SL | 70 | 165 |
| Clear Access Slide Pa | | |
| SAF-SPC9482-SL | 94 | 245 |
| SAF-SPC14282-SL | 142 | 300 |
| | | |

IN STOCK QuickShip)





Hinge (right door: header included with 7' system)



Hinge Pair (transom included with 8' system)

8'-HIGH SYSTEM

8'-high post, 94"-high panel, 7'-high door, and 11"-high transom with built-in door catch and

| Posts | Width (in.) | Weight (lbs.) |
|-----------------------|---------------|---------------|
| SAF-P96 | 2 | 15 |
| Panels | | |
| SAF-1094 | 10 | 18 |
| SAF-1694 | 16 | 21 |
| SAF-1994 | 19 | 23 |
| SAF-2294 | 22 | 24 |
| SAF-2894 | 28 | 27 |
| SAF-3494 | 34 | 31 |
| SAF-4694 | 46 | 37 |
| SAF-5894 | 58 | 43 |
| Hinge Door (transon | n included) | |
| SAF-H3494-SL | 34 | 42 |
| SAF-H4694-SL | 46 | 53 |
| Hinge Pair Door (tra | nsom included | |
| SAF-HP7094-SL | 70 | 98 |
| SAF-HP9494-SL | 94 | 118 |
| Slide Door (transom | included) | |
| SAF-S3494-SL | 34 | 62 |
| SAF-S4694-SL | 46 | 74 |
| SAF-S5894-SL | 58 | 86 |
| SAF-S7094-SL | 70 | 98 |
| SAF-S9494-SL | 94 | 122 |
| Slide Pair Door (tran | | |
| SAF-SP7094-SL | 70 | 164 |
| SAF-SP9494-SL | 94 | 188 |
| Clear Access Slide D | oor | |
| SAF-SC7094-SL | 70 | 165 |
| Clear Access Slide Pa | | |
| SAF-SPC9494-SL | 94 | 245 |
| SAF-SPC14294-SL | 142 | 300 |

ACCESSORIES

Hydraulic Closure SAF-HCL Angle Panel Kit SAF-HK



Clear Access Slide (fixed panel sold separately)



Clear Access Slide Pair



Slide (fixed panel sold separately)



Slide Pair













Saf-T-Fence® Drop-N-Lock® System protects your workers and machinery from harmful accidents and costly fines. Easy to install with quick access for maintenance.

When installing the Drop-N-Lock® system for machine guarding, its name says it all. Simply drop the panels into the post brackets and it locks in place with simple tightening. When maintenance workers need access to the machine, quickly remove the panel from the posts and the bracket system stays attached to prevent any misplaced hardware. Drop-N-Lock® is offered in a wide array of panel sizes, door options, and locking hardware to cover every requirement. Drop-N-Lock® can help you meet OSHA, Canadian (CSA), and ANSI/RIA R15.06-2012 safety standards.

Panels: 10-gauge welded-wire mesh with 11/4" x 21/2" grid openings. Wire mesh framed utilizing 14-gauge 11/2" x 11/2" steel angle.

Brackets: Galvanized finish. Attaches to posts for a universal configuration.

Doors: Hinge, Hinge Pair, Clear Access Slide, and Clear Access Slide Pair. Equipped with pull handle. Standard locking devices: Key Lock, Interlock Handle, or Snaplock.

Installation: All assembly hardware supplied.

Finish: Panels are black powder-coated; posts yellow powder-coated. Other powder-coating colors available.

Options: Padlock locking device. Polycarbonate panels. Custom configurations available. Interlock devices.

Accessories: Angle panel kit. Header bar extensions.

Warranty: 1 year.









Header Bar Extension

Drop-N-Lock® Bracket System

| | Weight | 12 | 14 | 16 | 18 | 21 | 23 | 28 | 33 | n width to |
|--------|----------|----------|----------|----------|----------|----------|----------|----------|-----------|---|
| | WxH | 10"×67" | 16"×67" | 19"×67" | 22"×67" | 28"×67" | 34"×67" | 46"×67" | 28" x 67" | isure 1" smaller ii |
| Panels | Part No. | DNL-1067 | DNL-1667 | DNL-1967 | DNL-2267 | DNL-2867 | DNL-3467 | DNL-4667 | DNL-5867 | Note: Panels measure 1" smaller in width to |

Keyed Lock
Keyed Lock
Snap Lock
Interlock Handle
Reyed Lock
Keyed Lock
Snap Lock
Snap Lock
Interlock Handle

Keyed Lock
Keyed Lock
Snap Lock
Interlock Handle
Interlock Handle
Keyed Lock
Keyed Lock
Snap Lock

WXH
34.x 67"
34.x 67"
34.x 67"
34.x 67"
46.x 67"
46.x 67"
58.x 67"
58.x 67"
58.x 67"
58.x 67"

Single-Hinge Door
Part No.
DNL-H3467-INT-L
DNL-H3467-INT-R
DNL-H3467-MR
DNL-H3467-MR
DNL-H4667-INT-L
DNL-H4667-MR
DNL-H4667-MR
DNL-H4667-MR
DNL-H5867-INT-L
DNL-H5867-MR
DNL-H5867-MR
DNL-H5867-MR
DNL-H5867-MR
DNL-H5867-MR

Interlock Handle Interlock Handle Keyed Lock Keyed Lock Snap Lock


High System: 67" H Panels & 72" H Posts. 5" sweep space


| Interlock for Hinge Door w/ Plastic Body Locking Interlock for Slide Door w/ Plastic Body Locking Interlock for Hinge Door w/ Plastic Body Locking Interlock for Hinge Door w/ Plastic Body Interlock for Hinge Door w/ Plastic Body Interlock for Hinge Door w/ Metal Body Interlock for Hinge Door w/ Metal Body Locking Interlock for Hinge Door w/ Metal Body Reach Locking Interlock for Hinge Door w/ Metal Body Angle Kit Convertor Kit for End/Line to Corner/3-Way Panel Hardware Kit Hinge Door/Hinge Pair Door Padlock Kit Door Slide Pair Door Padlock Kit PMD Door Slide Pair Door Padlock Kit BE 34" Header Bar With 24" Vertical Extensions HE 58" Header Bar With 24" Vertical Extensions He 70" Header Bar With 24" Vertical Extensions He 94" Header Bar With 24" Vertical Extensions He 194" Header Bar With 24" Vertical Extensions | Part No | Description | Weig |
|---|------------|--|------|
| | DNL-INT1 | Interlock for Hinge Door w/ Plastic Body | , 4 |
| | DNL-INT2 | Interlock for Slide Door w/ Plastic Body | 4 |
| | DNL-INT3 | Locking Interlock for Hinge Door w/ Plastic Body | 4 |
| | DNL-INT4 | Locking Interlock for Slide Door w/ Plastic Body | 4 |
| | DNL-INT5 | Interlock for Hinge Door w/ Metal Body | 9 |
| | DNL-INT6 | Interlock for Slide Door w/ Metal Body | 9 |
| | DNL-INT7 | Locking Interlock for Hinge Door w/ Metal Body | 9 |
| | DNL-INT8 | Locking Interlock for Slide Door w/ Metal Body | 9 |
| | DNL-HK02 | Angle Kit | 7 |
| | DNL-PK | Convertor Kit for End/Line to Corner/3-Way | 7 |
| | DNL-PNL | Panel Hardware Kit | _ |
| | DNL-HPAD | Hinge Door/Hinge Pair Door Padlock Kit | 7 |
| | DNL-SCPAD | Door Slide Door Padlock Kit | 7 |
| | DNL-SPCPAD | Door Slide Pair Door Padlock Kit | 7 |
| | DNL-34HBE | 34" Header Bar With 24" Vertical Extensions | 14 |
| | DNL-46HBE | 46" Header Bar With 24" Vertical Extensions | 16 |
| | DNL-58HBE | 58" Header Bar With 24" Vertical Extensions | - |
| | DNL-70HBE | 70" Header Bar With 24" Vertical Extensions | - |
| | DNL-94HBE | 94" Header Bar With 24" Vertical Extensions | 21 |
| | DNL-118HBE | 118" Header Bar With 24" Vertical Extensions | 24 |
| | DNL-191 | Spacer Tool for Bracket Place | _ |



2 14 16 17 19 21 24

| Clear-Access Slide Door | Door | | |
|-------------------------|-----------|-----------|----------------|
| Part No. | WxH | Lock Side | Lock Type |
| DNL-SC3467-INT-L | 34"×67" | Left | Interlock Hand |
| DNL-SC3467-INT-R | 34"x 67" | Right | Interlock Hand |
| DNL-SC3467-ML | 34"x 67" | Left | Keyed Lock |
| DNL-SC3467-MR | 34"×67" | Right | Keyed Lock |
| DNL-SC3467-SL | 34"×67" | L/R | Snap Lock |
| DNL-SC4667-INT-L | 46"x 67" | Left | Interlock Hand |
| DNL-SC4667-INT-R | 46"x 67" | Right | Interlock Hand |
| DNL-SC4667-ML | 46" x 67" | Left | Keyed Lock |
| DNL-SC4667-MR | 46"×67" | Right | Keyed Lock |
| DNL-SC4667-SL | 46"×67" | L/R | Snap Lock |
| DNL-SC5867-INT-L | 28"× 67" | Left | Interlock Hand |
| DNL-SC5867-INT-R | 28"× 67" | Right | Interlock Hand |
| DNL-SC5867-ML | 28"x 67" | Left | Keyed Lock |
| DNL-SC5867-MR | 28"x 67" | Right | Keyed Lock |
| DNL-SC5867-SL | 28"x 67" | L/R | Snap Lock |
| | | | |





| 11 | | | | \Rightarrow |
|----|--|---|---|---------------|
| B | | | B | \Rightarrow |
| | | t | | |

DNL-P72-EL

| <u> </u> |
|----------|

| | Baseplate | 2" x 6" | 2" x 6" | "9×"9 | "9ׄ9 |
|-------------------------|----------------|----------------------|------------|----------------------|---------------|
| ,2" H | Bracket Detail | Corner, 3-Way, 4-Way | End, Line | Corner, 3-Way, 4-Way | End, Line |
| Posts: All 2" W x 72" H | Part No. | DNL-P72-C34 | DNL-P72-EL | DNL-P72-C34-HD | DNL-P72-EL-HD |

Lock Type
Interlock Handle
Keyed Lock
Snap Lock
Interlock Handle
Reyed Lock
Snap Lock
Snap Lock
Snap Lock
Handle
Keyed Lock

WxH
70"x 67"
70"x 67"
70"x 67"
94"x 67"
94"x 67"
118"x 67"
118"x 67"

Hinge-Pair Door Part No. DNI-HP7067-INT DNI-HP3067-INT DNI-HP9467-INT DNI-HP9467-INT DNI-HP1867-INT DNI-HP18867-INT DNI-HP18867-INT DNI-HP18867-INT DNI-HP18867-INT

High System: 67"H Doors









Protect your inventory from theft and guard your employees from unwanted work-related accidents.

The Qwik-Fence® Pallet Rack Backing System is designed to secure an existing pallet rack or bulk rack. The all-steel system surrounds the back to prevent unauthorized access and protects employees and customers from dangerous spills. The open-mesh design allows for quick visual inspection and will not deter sprinkler systems.

Panels: 8-gauge welded-wire mesh with 1-1/2" X 3" grid openings.

Brackets: Galvanized. Mounted directly to the front of the upright.

Installation: All assembly hardware supplied.

Finish: Galvanized. Powder-coat option available.

Options: Extra-high extension kit (for extending panels past uprights).

Warranty: 1 year.











Qwik-Fence® Pallet Rack Backing System



| Pallet Rack | Backing Systen | n |
|-------------|-----------------------|---------------|
| Part No. | WxH | Weight (Lbs.) |
| QR-0703 | 86.5" x 36" | 23 |
| QR-0803 | 98.5" x 36" | 25 |
| QR-0903 | 110.5" x 36" | 28 |
| QR-1003 | 122.5" x 36" | 31 |
| QR-0704 | 86.5" x 48" | 29 |
| QR-0804 | 98.5" x 48" | 32 |
| QR-0904 | 110.5" x 48" | 36 |
| QR-1004 | 122.5" x 48" | 39 |
| QR-0705 | 86.5" x 60" | 36 |
| QR-0805 | 98.5" x 60" | 39 |
| QR-0905 | 110.5" x 60" | 43 |
| QR-1005 | 122.5" x 60" | 48 |



| Pallet Rack | Backing Panels – | - Flush Mount |
|-------------|------------------|---------------|
| Part No. | WxH | Weight (Lbs.) |
| QR-0703-F | 86.5" x 36" | 22 |
| QR-0803-F | 98.5" x 36" | 24 |
| QR-0903-F | 110.5" x 36" | 27 |
| QR-1003-F | 122.5" x 36" | 30 |
| QR-0704-F | 86.5" x 48" | 28 |
| QR-0804-F | 98.5" x 48" | 31 |
| QR-0904-F | 110.5" x 48" | 35 |
| QR-1004-F | 122.5" x 48" | 38 |
| QR-0705-F | 86.5" x 60" | 35 |
| QR-0805-F | 98.5" x 60" | 38 |
| QR-0905-F | 110.5" x 60" | 42 |
| QR-1005-F | 122.5" x 60" | 47 |





| Offset Brackets | | | | | | | |
|-----------------|--------|---------------|-------------|--|--|--|--|
| Part No. | Offset | Weight (Lbs.) | Description | | | | |
| QR-4 | 4" | 2 | 4" Offset | | | | |
| QR-6 | 6" | 2 | 6" Offset | | | | |
| QR-8 | 8" | 2 | 8" Offset | | | | |

Qwik-Fence Rack Backing Bracket

(Size and qty. vary – hardware Included) Note: Hardware supplied to fit 3"-wide closed or open uprights. Flush bracket hardware included with flush mount panel.



| Above Rack | Adjustable Ext | ension Kit |
|-------------------|------------------------------------|---------------|
| Part No. | Size | Weight (Lbs.) |
| QR-EXT | Adjustable | 4 |








Wire Mesh Security Solutions







An industry standard for many environments, such as:

Data centers and co-location server rooms

Office file and supply rooms

Service parts and tool areas

Commercial, residential, and office storage rooms

Big box retail stores

Food, liquor, and restaurant inventory storage control

Delivery entrance/exit for drivers

US postal offices

DEA

Many more









0

Saf-T-Fence® Partitioning System





Separate and secure work areas better.

Now you don't have to build permanent walls to control access to your inventory, tools, supplies, or documents. Saf-T-Fence® partitions provide security, structural strength, and flexibility — and we can have it ready to ship within 3 days! Our modular system offers three post heights, six styles of doors, and over 30 pre-fabricated wire-mesh

panel sizes and accessories (see reverse side). All pieces assemble and install precisely and easily. You enjoy an unobstructed view of your property, plus full air and light circulation, all with no change to your lighting or heating systems.



Cylinder Lock and Pull Handle



Thumbturn



Lever Handle



Pushbar




Paddle



Keypad



Padlock Hasp (padlock not included)



Electric Strike



Card Reader



Slide Door Magnetic Lock

IN STOCK | QuickShip)





Saf-T-Fence® Partitioning System

7'-HIGH SYSTEM

7'-high post, 82"-high panel, and 7'-high door with pull handle, cylinder lock, and thumbturn. 2" sweep space.

| Posts | Width (In.) | Weight (Lbs.) |
|-----------------------|-------------|---------------|
| SAF-P84B | 2 | 13 |
| Panels | | |
| SAF-1082 | 10 | 16 |
| SAF-1682 | 16 | 19 |
| SAF-1982 | 19 | 20 |
| SAF-2282 | 22 | 22 |
| SAF-2882 | 28 | 24 |
| SAF-3482 | 34 | 27 |
| SAF-4682 | 46 | 33 |
| SAF-5882 | 58 | 37 |
| Hinge Door | | |
| SAF-H3482-M | 34 | 39 |
| SAF-H4682-M | 46 | 48 |
| Hinge Pair Door | | |
| SAF-HP7082-M | 70 | 85 |
| SAF-HP9482-M | 94 | 101 |
| Slide Door | | |
| SAF-S3482-M | 34 | 55 |
| SAF-S4682-M | 46 | 65 |
| SAF-S5882-M | 58 | 75 |
| SAF-S7082-M | 70 | 85 |
| SAF-S9482-M | 94 | 105 |
| Slide Pair Door | | |
| SAF-SP7082-M | 70 | 155 |
| SAF-SP9482-M | 94 | 175 |
| Clear Access Slide D | | |
| SAF-SC7082-M | 70 | 165 |
| Clear Access Slide Pa | | 2.45 |
| SAF-SPC9482-M | 94 | 245 |
| SAF-SPC14282-M | 142 | 300 |

8'-HIGH SYSTEM

8'-high post, 94"-high panel, 7'-high door, and 11"-high transom with pull handle, cylinder lock, and thumbturn. 2" sweep space.

| rocky arra triambear | 2 Sweep : | pucc. |
|----------------------|--------------|---------------|
| Posts | Width (In.) | Weight (Lbs.) |
| SAF-P96B | 2 | 15 |
| Panels | | |
| SAF-1094 | 10 | 18 |
| SAF-1694 | 16 | 21 |
| SAF-1994 | 19 | 23 |
| SAF-2294 | 22 | 24 |
| SAF-2894 | 28 | 27 |
| SAF-3494 | 34 | 31 |
| SAF-4694 | 46 | 37 |
| SAF-5894 | 58 | 43 |
| Hinge Door (transo | m included) | |
| SAF-H3494-M | 34 | 42 |
| SAF-H4694-M | 46 | 53 |
| Hinge Pair Door (tra | ansom includ | ed) |
| SAF-HP7094-M | 70 | 98 |
| SAF-HP9494-M | 94 | 118 |
| Slide Door (transon | n included) | |
| SAF-S3494-M | 34 | 62 |
| SAF-S4694-M | 46 | 74 |
| SAF-S5894-M | 58 | 86 |
| SAF-S7094-M | 70 | 98 |
| SAF-S9494-M | 94 | 122 |
| Slide Pair Door (tra | nsom include | |
| SAF-SP7094-M | 70 | 164 |
| SAF-SP9494-M | 94 | 188 |
| Clear Access Slide I | Door | |
| SAF-SC7094-M | 70 | 165 |
| Clear Access Slide I | Pair Door | |
| SAF-SPC9494-M | 94 | 245 |
| SAF-SPC14294-M | 142 | 300 |

10'-HIGH SYSTEM

Start with an 8'-high system and add extension posts and extension panels. 2" sweep space.

| Extension Posts | Width (In.) | Weight (Lbs.) |
|------------------|-------------|---------------|
| SAF-PE24B | 2 | 5 |
| Extension Panels | | |
| SAF-1024 | 10 | 7 |
| SAF-1624 | 16 | 8 |
| SAF-1924 | 19 | 9 |
| SAF-2224 | 22 | 9 |
| SAF-2824 | 28 | 11 |
| SAF-3424 | 34 | 12 |
| SAF-4624 | 46 | 15 |
| SAF-5824 | 58 | 17 |
| SAF-7024 | 70 | 20 |
| SAF-9424 | 94 | 25 |
| | | |

| LOCKING | OPT | ION | S | | | |
|--|-----|-----|---|----|----|-----|
| | Н | HP | S | SP | SC | SPC |
| Padlock Hasp | | | | | | |
| Snap Lock | | | | | | |
| Cylinder Lock | | | | | | |
| Keyed Alike Cylinders | | | | | | |
| Cylinder to Accept Interchangable Core | | | | | | |
| Thumbturn | | | | | | |
| Hydraulic Closer | | | | | | |
| Pushbar Exit Device | | | | | | |
| Deadlatch Paddle | | | | | | |
| Lever Handle | | | | | | |
| Knob Handle | | | | | | |
| Electric Strike | | | | | | |
| Magnetic Lock | | | | | | |
| Keypad Lock | | | | | | |
| Proximity Reader | | | | | | |
| Magstripe Card Reader | | | | | | |
| Exit Button | | | | | | |
| Safety Switch with Slide Bolt Actuator | | | | | | |
| Locking Safety Switch with Slide | | | | | | |



Hinge



Hinge Pair (transom included with 8' and 10' system)



(fixed panel sold separately)



Slide Pair



Clear Access Slide (fixed panel sold separately)



Clear Access Slide Pair



Bolt Actuator



0

Qwik-Fence® Partitioning System



Qwik-Fence is a tough but attractive partitioning system for securing any space.

- Low-Cost Partitioning System
- Maintenance-Free
- Unsurpassed Adjustability







TOTAL COST OF OWNERSHIP.

Qwik-Fence® welded wire partitions have one of the lowest total cost of ownership of any wire partition system on the market – one of the lowest material, installation, and relocation costs.

EXTREMELY TOUGH, BUT ATTRACTIVE, SYSTEM FOR SAFE AND SECURE VISIBLE STORAGE.

Galvanized 8-gauge wire is welded at each intersection, creating more than 500 welds in a 4'x 8' panel. This produces a wire-mesh panel able to withstand 1,475 lbs. of force (substantially stronger than 10-gauge woven-wire partition panels, as confirmed by independent testing). Posts and doors are all-steel and galvanized for long-lasting performance and good looks. The open-wire mesh design provides unobstructed view and allows air circulation and light penetration, while providing security. This system requires no change to your heating, lighting, or ventilation systems.

Qwik-Fence partitions look new for years to come. Galvanized components are rust-resistant and maintenance-free — no paint touch-ups are ever needed. A bright steel finish gives it a clean, attractive look in both office and production areas.

UNSURPASSED ADJUSTABILITY. Installs, Reconfigures Faster.

Only Qwik-Fence offers panel size adjustments without purchasing special panels — eliminating costly errors and delays due to inaccurate measurements or last-minute changes. By using fewer parts, Qwik-Fence can be installed 25% faster than conventional systems. Because there are no pins to drill out, as with hook-fastener systems, Qwik-Fence can be reconfigured faster and more easily. Only Qwik-Fence offers pre-hung doors, cutting installation time by 50%.



FREE LAYOUT SERVICE


Save time and money by letting us lay out your 1-, 2-, 3-, or 4-sided partition. Our staff has created thousands of partitioning systems for satisfied customers in all types of environments. With our expertise you can be sure that your partition will perfectly fit your needs. Call and tell us your requirements or send a sketch or AutoCad blueprints, and we'll develop a solution. No obligation.

We're here to help - just tell us:

- 1. Overall dimensions, including height.
- Location, size, and type of doors or service windows.
- 3. Location of existing walls or obstructions.


QWIK-FENCE OPTIONS

- Roof
- Service window
- Keyed-alike cylinder lock
- Double-cylinder lock
- ADA-compliant lock
- Push-button lock
- Electric strike/card reader lock
- Interlock switches
- Crash/panic bars
- Automatic closures
- DEA systems
- Colocation systems
- · Powder-coating finish



OWIK-FENCE PRE-ENGINEERED ROOMS AND CAGES


Pre-packaged, standard room kits are quick to set up and can be easily relocated. Each kit comes complete with a 4'-wide x 8'-high sliding door with a built-in cylinder lock for maximum security. Standard 8'- or 12'-high rooms are available with or without roofs in 8'x 8', 12'x 8', 12'x 12', 16'x 12', and 16'x 16' sizes. Pre-engineered rooms are shipped knocked down and include all assembly hardware.

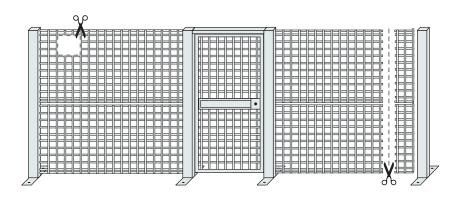

Qwik-Fence panels can be trimmed in the field to accommodate changes in dimensions, obstructions, floor or wall irregularities, or custom conveyor or lift systems. Since Qwik-Fence is all welded and galvanized, field adjustments look factory perfect; no paint touch-ups or unraveling wires.

MODULAR COMPONENTS MAKE PLANNING, INSTALLING EASY.

Modular panels stack together to form partitions up to 20' in height. Hardware is accessible from inside the partition for additional security. Universal line and corner posts install every 8' on center, instead of 10', providing 20% more strength. Extension posts can be added to increase the height of any Qwik-Fence enclosure without reinstallation.

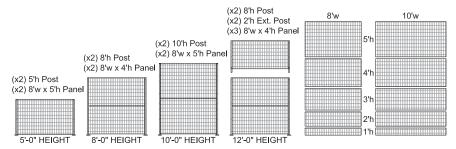

Now in 10' wide lengths and up to 5' heights per panel.



Qwik-Fence Sliding Doors

Pre-framed, full-height clearance and up to 12' wide for ease of material handling and the operation of forklifts and carts. Built-in cylinder lock included.



Qwik-Fence Hinged Doors

Pre-hung single and pair doors feature full-height clearance and are up to 4' wide. Pre-hung dutch doors feature full-height clearance and are 3' wide. Built-in cylinder lock included.



FINISHES

Aside from our standard, maintenance-free, galvanized finish, Qwik-Fence can be ordered with a durable powder-coating finish in several standard colors. We can also match a specific custom color. Colors shown are approximate.

Standard powder-coated colors:



SPECIFICATIONS

PANELS: 8-gauge galvanized welded-wire mesh with 1-1/2" x 3" grid openings (other sizes available) and 1-1/2" bends on top and bottom. Stack panels to heights of 20'.

POSTS: 2"x 2", 14-gauge galvanized steel welded to 6"x 2"x 1/4" mounting plate.

HINGED DOORS: 8-gauge galvanized welded-wire mesh with 1-1/2" x 3" grid openings (other sizes available). Pre-hung with standard 94" clear-height opening.

SLIDING DOORS: 8-gauge galvanized welded wire mesh with 1-1/2"x 3" grid openings (other sizes available). Single and double sliding doors available. Pre-hung with standard 96" clear-height opening.

DUTCH DOORS: 8-gauge galvanized welded-wire mesh with 1-1/2" x 3" grid openings (other sizes available). Pre-hung with standard 96" clear-height opening.

LOCKING: Built-in cylinder lock keyed different (KD), pre-installed, or padlock hasp.

HARDWARE: All hardware included.

FINISH: Galvanized.

OPTIONS: Panels and doors also available in 1-1/2"x 1-1/2" and 2"x 2" grid openings. Keyed-alike cylinders (KA), double cylinders (DC), ADA-compliant locks, push-button locks, electric strike/card reader style locks, and interlock switches. Crash/panic bars, spring hinges, and automatic closures. Service window. Roof. Powder-coating finish.

WARRANTY: 1-year.



PALLETIZED SHIPMENTS

For easy handling and reduced shipping damage.



Qwik-Fence® Partitioning System

| STANDARD CO | MPONENTS | |
|--|-----------------|-------------|
| | Part No. | Wgt. (lbs.) |
| Panels | | |
| 10' x 5' | 10x5 | 46 |
| 10' x 4' | 10x4 | 37 |
| 10' x 3' | 10x3 | 28 |
| 10' x 2' | 10x2 | 19 |
| 10' x 1' | 10x1 | 10 |
| 8' x 5' | 8x5 | 37 |
| 8' x 4' | 8x4 | 29 |
| 8' x 3' | 8x3 | 23 |
| 8' x 2' | 8x2 | 16 |
| 8' x 1' | 8x1 | 9 |
| Posts | | |
| 8' Universal Post | P8 | 20 |
| 8' Post Flat | P8 Flat | 25 |
| 8' Post Flat/Offset | P8 Flat/Offset | 25 |
| 1' Extension Post | XP1 | 4 |
| 2' Extension Post | XP2 | 6 |
| 3' Extension Post | XP3 | 8 |
| 4' Extension Post | XP4 | 10 |
| 6' Extension Post | XP6 | 17 |
| 8' Extension Post | XP8 | 19 |
| Options | | |
| Roof Support | | |
| Center Tube | RST | 2/f |
| Ceiling Wall Angle | CA8 | 5 |
| Wall Kit | WK | 8 |
| Service Window Kit | SWK | 55 |
| Post Top Extension | PXT | 5 |
| Wire Cutter | WIR CUTR | 5 |
| Header 2"x2" | H22-48 | |
| Capping Channel 96" | Consult factory | |
| Powder Coating | Consult factory | |
| Roof | Consult factory | |
| 8' Door Transon Kit to Fit 8' Door into 10' Frame | TK-10 | 3 |
| 10' Door Transon Kit to Fit 10' Door into 2' Frame | TK-12 | 6 |

| STANDARD D | OORS | | | | | | | | |
|-------------------------|-------------|---------------|-----------------|-------|----------|------|----------|------|--------|
| | 8'-HIGH | | 10'-HIGH | | | | 12'-HIGH | | |
| Width | Part No. | Wgt. (lbs.) | Part No. | Wat. | (lbs.) | | Part No. | Wat. | (lbs.) |
| Hinged Door | | J . (· · · / | | | () / | | | | ()) |
| 3' | H-3 | 64 | Consult factory | Cons | ult fac | torv | | | |
| 4' | H-4 | 75 | Consult factory | | ult fac | | _ | | |
| Hinged Door (Pair) | | 7.5 | consult factory | COTIC | oure rac | tory | | | |
| 3' each | HP6-8 | 160 | Consult factory | Cons | ult fac | tory | _ | | |
| 4' each | HP8-8 | 190 | Consult factory | | sult fac | | | | |
| | пго-о | 190 | Consult factory | COIIS | uit iac | tory | | | |
| Dutch Door | D-3 | 121 | Consult forton | Conc | ult for | + | | | |
| | D-3 | 121 | Consult factory | Cons | ult fac | lory | | _ | _ |
| Slide Door | 63 | 00 | C life i | | lı C | | | | |
| 3' | S3 | 88 | Consult factory | | ult fac | tory | | | |
| 4' | S4 | 100 | S-410 | 129 | | | S-412 | 155 | |
| 5' | S5 | 132 | S-510 | 160 | | | S-512 | 192 | |
| 6' | S6 | 143 | S-610 | 178 | | | S-612 | 211 | |
| 8' | S8 | 170 | S-810 | 273 | | | S-812 | 328 | |
| 10' | S10 | 249 | S-1010 | 308 | | | S-1012 | 367 | |
| Slide Door (Pair) | | | | | | | | | |
| 8' | SP8-8 | 236 | SP8-10 | 279 | | | SP8-12 | 335 | |
| 10' | SP10-8 | 265 | SP10-10 | 312 | | | SP10-12 | 374 | |
| | | | | | | | | | |
| LOCKING OP | TIONS | | | | | | | | |
| | | | | Н | HP | S | SP | SC | SPC |
| Padlock Hasp | | | | - | - | 3 | 31 | 30 | 31 C |
| Snap Lock | | | | _ | _ | _ | | | |
| Cylinder Lock | | | | | | | | | |
| Keyed Alike Cylinders | | | | | | | | | |
| Cylinder to Accept Inte | erchangable | Core | | | | | | | |
| Thumbturn | | | | | | | | | |
| Hydraulic Closer | | | | | | | | | |
| Pushbar Exit Device | | | | | | | | | |
| Deadlatch Paddle | | | | | | | | | |
| Lever Handle | | | | | | | | | |

Keyed Alike Cylinders Cylinder to Accept Interchangable Core Thumbturn Hydraulic Closer Pushbar Exit Device Deadlatch Paddle Insult factory I

OTHER PARTITION PRODUCTS



Saf-T-Fence Partitions

Provides an extra measure of structural strength and smaller mesh openings for increased security.



Wov-N-Wire Partitions

The traditional enclosure system specified by architects and contractors. The tough steel wire is woven to create a durable, high-quality system.

| Z | | | | |
|-----------|--------|--------------|--------------|--------------|
| | | 2-SIDED ROOM | 3-SIDED ROOM | 4-SIDED ROOM |
| WxD | Height | Part No. | Part No. | Part No. |
| 8' x 8' | 8' | QWK888-2 | QWK888-3 | QWK888-4 |
| 12' x 8' | 8' | QWK1288-2 | QWK1288-3 | QWK1288-4 |
| 12' x 12' | 8' | QWK12128-2 | QWK12128-3 | QWK12128-4 |
| 16' x 12' | 8' | QWK16128-2 | QWK16128-3 | QWK16128-4 |
| 16' x 16' | 8' | QWK16168-2 | QWK16168-3 | QWK16168-4 |

QWK8812-2

OWIK-FENCE® PRE-ENGINEERED STANDARD ROOM KITS

12' x 8' 12' QWK12812-2 QWK12812-3 QWK12812-4 12' 12' x 12' QWK121212-2 QWK121212-3 QWK121212-4 16' x 12' 12' QWK161212-2 QWK161212-3 QWK161212-4 12' 16' x 16' QWK161612-2 QWK161612-3 QWK161612-4

QWK8812-3

QWK8812-4

12'

8' x 8'



Wov-N-Wire[™] Partitioning System





Modular partitions that are easy to move and built to last.

Wov-N-Wire™ partitions are the traditional enclosure system specified by architects and contractors. The tough steel wire is woven to create a durable, high-quality system.

Construction Details – 10-gauge steel wire, woven into an extremely strong, 1-1/2" diamond mesh. Frames, posts, and components are all-steel.

Modular – Component system makes it easy to design a partition of any size, up to 25' in height. Components bolt together quickly. Easily relocated.

Maintenance-Free – Standard gray powder-coating finish is tough and maintenance-free. Other colors available.



PRE-DESIGNED ROOM KITS:

Wov-N-Wire 2-, 3-, and 4-sided room kits are economical and easily installed. Includes a sliding door with cylinder lock and all hardware. Sizes range from 10' x 10' to 30' x 20'. Options include roof or service window.

OPTIONS

- Roof
- Service window
- Keyed-alike cylinder lock
- Double-cylinder lock
- ADA-compliant lock
- Push-button lock
- Electric strike/card reader lock
- Interlock switches
- Crash/panic bars
- Automatic closures
- DEA systems
- Colocation systems





Panels XX'

RST



Wov-N-Wire™ Partitioning System

| WOV-N-WIRE™ PA | RTITION | STANDARD COMPONENTS | | | |
|-------------------------|---|---|----------------------|----------------------|--|
| | 7' High Part No. | 8' High Part No. | 10' High Part No. | 12' High Part No. | |
| Panels | | | | | |
| 5' Wide | 507 | 508 | 510 | 512 | |
| 4' Wide | 407 | 408 | 410 | 412 | |
| 3' Wide | 307 | 308 | 310 | 312 | |
| 2' Wide | 207 | 208 | 210 | 212 | |
| 1' Wide | 107 | 108 | 110 | 112 | |
| Adjustable Panels | | | | | |
| 2-1/2" to 13" | AP-7 | AP-8 | AP-10 | AP-12 | |
| Posts | | | | | |
| Line Posts | LP-7 | 7 LP-8 LP-10 LP-12 7 PC-8 PC-10 PC-12 C-7 APC-8 APC-10 APC-12 | | | |
| Corner Posts | 407 408 410 412 307 308 310 312 207 208 210 212 107 108 110 112 AP-7 AP-8 AP-10 AP-12 LP-7 LP-8 LP-10 LP-12 PC-7 PC-8 PC-10 PC-12 | | | | |
| Adjustable Corner Posts | 7' High 8' High 10' High 12' High Part No. Part No. Part No. Part No. 507 508 510 512 407 408 410 412 307 308 310 312 207 208 210 212 107 108 110 112 AP-7 AP-8 AP-10 AP-12 LP-7 LP-8 LP-10 LP-12 PC-7 PC-8 PC-10 PC-12 sts APC-7 APC-8 APC-10 APC-12 | | | | |
| Door Spacer Posts | DS-7 | DS-8 | DS-10 | DS-12 | |

Options

| 6 : 145 1 12 | יו כו ונ | | | | |
|-------------------------|-----------|---|--------------------------------------|--------|--|
| Service Window Panels w | ith Shelf | | | | |
| Slide 18-1/2" x 11-1/2" | 507SW | 508SW | 510SW | 512SW | |
| Drop 16-1/2" x 24" | 507DW | 508DW | 510DW | 512DW | |
| Wall Kit | WCK | 4 zinc-plated clamps and hardware | | | |
| Cut-Out Kit | СОК | For cut-outs when obstructions, such as piping, exist | | | |
| T-Joint Kit | TJK | 3-panel inte | rsection applic | cation | |
| T-Joint Door Kit | TJD | 3 panels, inc | luding door | | |
| Mid Panel Kit | MPK | | hardware to a ttened expand 2" – 13" | | |
| Cylinder Mortise Lock | | Consult fact | ory | | |

Nominal heights: Actual height for 8' partition is 7'10-3/4''; actual height for 10' partition is 9'10-3/4''; actual height for 12' partition is 11'10-3/4''.

| LOCKING OPTIONS | | | | |
|--|---|----|---|----|
| | Н | HP | S | SP |
| Padlock Hasp | | | | |
| Snap Lock | | | | |
| Cylinder Lock | | | | |
| Keyed Alike Cylinders | | | | |
| Cylinder to Accept Interchangable Core | | | | |
| Thumbturn | | | | |
| Hydraulic Closer | | | | |
| Pushbar Exit Device | | | | |
| Deadlatch Paddle | | | | |
| Lever Handle | | | | |
| Knob Handle | | | | |
| Electric Strike | | | | |
| Magnetic Lock | | | | |
| Keypad Lock | | | | |
| Proximity Reader | | | | |
| Magstripe Card Reader | | | | |
| Exit Button | | | | |
| Safety Switch with Slide Bolt Actuator | | | | |


Locking Safety Switch with Slide Bolt Actuator





| NOV- | N-WIRE™ | PARTITIO | N CEILIN | GS | | |
|---|-------------------|-------------------|-------------------|-------------------|-------------------|--|
| | 1' Panel Width | 2' Panel Width | 3' Panel Width | 4' Panel Width | 5' Panel Width | |
| Length | Part No. | |
| Standard Ceiling Panels | | | | | | |
| 10' | CP110S | CP210S | CP310S | CP410S | CP510S | |
| Odd-Size | Ceiling Pan | els (specify ex | kact height ar | nd width) | | |
| 6' | CP1-6 | CP2-6 | CP3-6 | CP4-6 | CP5-6 | |
| 8' | CP1-8 | CP2-8 | CP3-8 | CP4-8 | CP5-8 | |
| 10' | CP1-10 | CP2-10 | CP3-10 | CP4-10 | CP5-10 | |
| Ceiling V | Vall Angle an | d Fascia Bar | Recommende | d to Support E | ntire | |
| Perimete | r of Ceiling F | Panels | | | | |
| LengthPart No.Part No.Part No.Part No.Part No.Standard Ceiling Panels10'CP110SCP210SCP310SCP410SCP510SOdd-Size Ceiling Panels (specify exact height and width)6'CP1-6CP2-6CP3-6CP4-6CP5-68'CP1-8CP2-8CP3-8CP4-8CP5-810'CP1-10CP2-10CP3-10CP4-10CP5-10Ceiling Wall Angle and Fascia Bar Recommended to Support Entire Perimeter of Ceiling Panels10'CWA | | | | | | |
| Ceiling Wall Angle and Fascia Bar Recommended to Support Entire Perimeter of Ceiling Panels | | | | | | |

| WOV-N | -WIRE™ PAF | RTITION STO | OCK DOORS | |
|-------------|------------------|-------------|-----------|----------|
| | 7' High | 8' High | 10' High | 12' High |
| | Part No. | Part No. | Part No. | Part No. |
| Single-Hin | ged Door with 1 | ransom | | |
| 3' Wide | HS7-307 | HS7-308 | HS7-310 | HS7-312 |
| 4' Wide | HS7-407 | HS7-408 | HS7-410 | HS7-412 |
| | Hinged Door wi | ith Transom | | |
| 6' | HP7-607 1 | HP8-608 | HP8-610 | HP8-612 |
| 8' | HP7-807 | HP8-808 | HP8-810 | HP8-812 |
| Dutch Doc | r with Transom | | | |
| 3' | DD7-307 | DD7-308 | DD7-310 | DD7-312 |
| 4' | DD7-407 | DD7-408 | DD7-410 | DD7-412 |
| Single Slid | e Door with Tra | nsom | | |
| 3' | SS7-307 | SS7-308 | SS7-310 | SS7-312 |
| 4' | SS7-407 | SS7-408 | SS7-410 | SS7-412 |
| 5′ | SS7-507 | SS7-508 | SS7-510 | S7-512 |
| 6' | SS7-607 | SS7-608 | SS7-610 | SS7-612 |
| Single Slid | e Door – Full He | eight | | |
| 5′ | SSF-507 | SSF-508 | SSF-510 | SSF-512 |
| 6' | SSF-607 | SSF-608 | SSF-610 | SSF-612 |
| 8' | SSF-807 | SSF-808 | SSF-810 | SSF-812 |
| 10' | SSF-1007 | SSF-1008 | SSF-1010 | SSF-1012 |
| Bi-Parting | Slide Door – Fu | ll Height | | |
| 8' | SPF-807 | SPF-808 | SPF-810 | SPF-812 |
| 10' | SPF-1007 | SPF-1008 | SPF-1010 | SPF-1012 |
| | | | | |

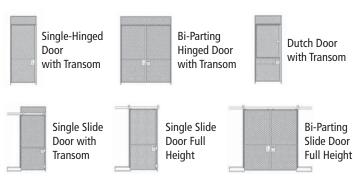









Secure small- to medium-sized high-value products on the sales floor, back room, receiving area, or warehouse.

Advantages

All-Steel Construction: Made from sturdy, 8-gauge galvanized welded-wire mesh panels on a 2" x 2" frame made of 14-gauge galvanized steel. Hinged doors include a built-in cylinder lock.

Secure, But Open: Open-mesh design allows for a quick visual inspection of valuable items.

Easy Assembly: Components are pre-punched for easy assembly.

Options: Optional shelf available in 4-gauge galvanized welded wire or 20-gauge galvanized steel panel. Powder-coating finish available in multiple colors.

Standard Sizes: Cabinets come in widths of 48" (single door) or 96" (double door) and a variety of depths and heights. The 96" model will fit in a standard 96"-wide pallet rack.









Stor-More® Loss Prevention Security Cabinet

Pioneered by Folding Guard – still the standard in loss prevention.

Panels: 8-gauge galvanized welded wire with 1-1/2" x 3" grid openings.

Frame: 2" x 2" 14-gauge galvanized steel frame.

Door: Industrial-grade hinged doors feature built-in cylinder lock.

Finish: Galvanized.

Options: Wire shelf made of 4-gauge galvanized welded wire with 1-½" x 3" grid openings. Sheet-metal shelf made of 18-gauge galvanized steel. **Note:** 8000 Series require two shelves for each full-width level and one shelf for each half-width level.

Installation: Ships knocked down or fully assembled.

Warranty: 1 year.

Available Colors:





| 4000 Serie 48"-Wide Hing | | or | Opt |
|-------------------------------------|-----------|---------------|--------|
| Part No. | DxΗ | Weight (Lbs.) | Part N |
| LPC-4018-6 | 18" x 72" | 230 | Weld |
| LPC-4030-6 | 30" x 72" | 254 | LPC-V |
| LPC-4040-6 | 40" x 72" | 257 | LPC-V |
| LPC-4018-8 | 18" x 96" | 285 | LPC-V |
| LPC-4030-8 | 30" x 72" | 296 | Galva |
| LPC-4040-8 | 40" x 72" | 319 | LPC-S |
| 8000 Seri e 96"-Wide Hing | | oor | LPC-S |
| LPC-8018-6 | 18" x 72" | 397 | 8000 |
| LPC-8030-6 | 30" x 72" | 420 | each 1 |
| LPC-8040-6 | 40" x 72" | 430 | each l |
| LPC-8018-8 | 18" x 96" | 461 | |
| LPC-8030-8 | 30" x 96" | 482 | |
| LPC-8040-8 | 40" x 96" | 510 | |

| Options | | |
|--------------------|-------------|---------------|
| Part No. | DxΗ | Weight (Lbs.) |
| Welded Wire | e Adjustabl | e Shelf |
| LPC-WS-18 | 44" x 14" | 11 |
| LPC-WS-30 | 44" x 26" | 20 |
| LPC-WS-40 | 44" x 36" | 29 |
| Galvanized | Steel Adjus | table Shelf |
| LPC-SS-18 | 44" x 14" | 11 |
| LPC-SS-30 | 44" x 26" | 20 |
| LPC-SS-40 | 44" x 36" | 29 |
| | | |

8000 Series require two shelves for each full-width level and one shelf for each half-width level.







Secure Tenant Military Loss Prevention Storage Cabinets



Storage compartments come in multiple sizes and tiers so you can store anything from military equipment to tenants' personal belongings.









Stor-More® Tenant Storage Lockers Framed Welded Wire







Sturdy, secure storage for tenants and businesses

Panel: 10-gauge 2" x 2" welded-wire mesh, welded into 14-gauge 1-1/4" x 1-1/4" frames.

Door and Panel Frames: 14-gauge galvanized steel, $1-\frac{1}{4}$ " x $1-\frac{1}{4}$ " x 90" angle.

Door: 10-gauge 2"x 2" welded-wire mesh, welded into 14-gauge 1-\(^1\su^n\) x 1-\(^1\su^n\) angle frames; equipped with two steel pin butt hinges and padlock hasps per door.

Double-Tier Unit: Includes 18-gauge galvanized sheet metal shelf.

Shelves: Double-tier unit includes 18-gauge galvanized sheet metal shelf.

Triple-tier unit includes two 18-gauge galvanized sheet metal shelves.

Finish: Machine gray powder-coating.

Options:

- Locker top constructed of 10-gauge welded-wire mesh with 2" x 2" openings.
- Locker back constructed of 10-gauge welded-wire mesh, with 2" x 2" openings or 18-gauge sheet metal. Required for back-to-back units.
- Locker bottom constructed of 18-gauge galvanized sheet metal.
- * Lockers do not include padlocks

Warranty: 1 year.



Available Colors

Machine Gray (Standard)

Saf-T-Orange

Saf-T-Yellow

Blood Red

Black

Blue Streak

Sky White

Moss Green

Unicream

Signal Gray





Stor-More® Tenant Storage Lockers Framed Welded Wire



Stor-More® Tenant Storage Locker Single-Tier **Framed Welded Wire**

| Starter Unit | | | Add-On Uni | t | |
|--------------|-----------|------------|------------|-----------|------------|
| Part No. | WxDxH | Wgt.(lbs.) | Part No. | WxDxH | Wgt.(lbs.) |
| ST133-FW | 3'x3'x90" | 126 | AD133-FW | 3'x3'x90" | 94 |
| ST134-FW | 3'x4'x90" | 146 | AD134-FW | 3'x4'x90" | 101 |
| ST135-FW | 3'x5'x90" | 165 | AD135-FW | 3'x5'x90" | 113 |
| ST143-FW | 4'x3'x90" | 118 | AD143-FW | 4'x3'x90" | 91 |
| ST144-FW | 4'x4'x90" | 148 | AD144-FW | 4'x4'x90" | 107 |
| ST145-FW | 4'x5'x90" | 174 | AD145-FW | 4'x5'x90" | 121 |

Stor-More® Tenant Storage Locker Double-Tier **Framed Welded Wire**

| ST233-FW | 3'x3'x90" | 154 | AD233-FW | 3'x3'x90" | 122 |
|----------|-----------|-----|----------|-----------|-----|
| ST234-FW | 3'x4'x90" | 182 | AD234-FW | 3'x4'x90" | 139 |
| ST235-FW | 3'x5'x90" | 208 | AD235-FW | 3'x5'x90" | 156 |
| ST243-FW | 4'x3'x90" | 166 | AD243-FW | 4'x3'x90" | 134 |
| ST244-FW | 4'x4'x90" | 195 | AD244-FW | 4'x4'x90" | 151 |
| ST245-FW | 4'x5'x90" | 222 | AD245-FW | 4'x5'x90" | 168 |

Stor-More® Tenant Storage Locker Triple-Tier Framed Welded Wire

| 3'x3'x90" | 154 | AD333-FW | 3'x3'x90" | 122 |
|-----------|--|--|--|--|
| 3'x4'x90" | 182 | AD334-FW | 3'x4'x90" | 139 |
| 3'x5'x90" | 208 | AD335-FW | 3'x5'x90" | 156 |
| 4'x3'x90" | 166 | AD343-FW | 4'x3'x90" | 134 |
| 4'x4'x90" | 195 | AD344-FW | 4'x4'x90" | 151 |
| 4'x5'x90" | 222 | AD345-FW | 4'x5'x90" | 168 |
| | 3'x4'x90" 3'x5'x90" 4'x3'x90" 4'x4'x90" | 3'x4'x90" 182 3'x5'x90" 208 4'x3'x90" 166 4'x4'x90" 195 | 3'x4'x90" 182 AD334-FW 3'x5'x90" 208 AD335-FW 4'x3'x90" 166 AD343-FW 4'x4'x90" 195 AD344-FW | 3'x4'x90" 182 AD334-FW 3'x4'x90" 3'x5'x90" 208 AD335-FW 3'x5'x90" 4'x3'x90" 166 AD343-FW 4'x3'x90" 4'x4'x90" 195 AD344-FW 4'x4'x90" |

Stor-More® Tenant Storage Locker Single-Tier Framed Welded Wire – Complete (with top & back panel)

Starter Unit

| Part No. | WxDxH | Wgt.(lbs.) | | |
|--------------|-----------|------------|--|--|
| ST133-FW-COM | 3'x3'x90" | 126 | | |
| ST134-FW-COM | 3'x4'x90" | 146 | | |
| ST135-FW-COM | 3'x5'x90" | 165 | | |
| ST143-FW-COM | 4'x3'x90" | 118 | | |
| ST144-FW-COM | 4'x4'x90" | 148 | | |
| ST145-FW-COM | 4'x5'x90" | 174 | | |

Stor-More® Tenant Storage Locker Double-Tier Framed Welded Wire - Complete (with top & back panel)

| ST233-FW-COM | 3'x3'x90" | 154 | | |
|--------------|-----------|-----|--|--|
| ST234-FW-COM | 3'x4'x90" | 182 | | |
| ST235-FW-COM | 3'x5'x90" | 208 | | |
| ST243-FW-COM | 4'x3'x90" | 166 | | |
| ST244-FW-COM | 4'x4'x90" | 195 | | |
| ST245-FW-COM | 4'x5'x90" | 222 | | |

Stor-More® Tenant Storage Locker Triple-Tier Framed Welded Wire - Complete (with top & back panel)

| ST333-FW-COM | 3'x3'x90" | 154 | | |
|--------------|-----------|-----|--|--|
| ST334-FW-COM | 3'x4'x90" | 182 | | |
| ST335-FW-COM | 3'x5'x90" | 208 | | |
| ST343-FW-COM | 4'x3'x90" | 166 | | |
| ST344-FW-COM | 4'x4'x90" | 195 | | |
| ST345-FW-COM | 4'x5'x90" | 222 | | |

Modular design makes Stor-More® lockers easy to plan, install and relocate. Available in single- and double-tier units, and can be combined. Begin with starter unit, single- or double-tier; complete row with add-on units.

Single Tier






Add-On Starter 1 Single-tier door 1 Single-tier door 2 End-run panels 1 Side panel

Triple Tier



Starter Add-On 1 Triple-tier door 1 Triple-tier door 2 End-run panels 1 Side panel

2 Shelves 2 Shelves



Starter Add-On

1 Double-tier door 1 Double-tier door 2 End-run panels 1 Side panel

1 Shelf 1 Shelf



Starter


Tier(s) 0-2 Shelves (specify) 1 Triple-tier door

2 End-run panels

1 Tip panel

1 Back panel

Single-row locker configurations installed against an existing wall do not require optional back panels. Double-row locker configurations share common back panels.





| 04! | | |
|-----------------------|--------|------------|
| Options | | |
| Part No. | WxD | Wgt.(lbs.) |
| Locker Tops | | |
| LT33-FW | 3'x3' | 6 |
| LT34-FW | 3'x4' | 6 |
| LT35-FW | 3'x5' | 8 |
| LT43-FW | 4'x3' | 6 |
| LT44-FW | 4'x4' | 8 |
| LT45-FW | 4'x5' | 8 |
| Locker Backs | | |
| SMBK3690-FW | 3'x90" | 30 |
| SMBK4890-FW | 4'x90" | 40 |
| Bottom Shelf | | |
| LS33 | 3'x3' | 20 |
| LS34 | 3'x4' | 25 |
| LS35 | 3'x5' | 30 |
| LS43 | 4'x3' | 20 |
| LS44 | 4'x4' | 25 |
| LS45 | 4'x5' | 30 |
| Powder-Coating | | |
| Consult factory | | |







Stor-More[®] Tenant Storage Lockers Welded Wire Galvanized Steel









Sturdy, secure storage for tenants and businesses.

Panels: 4-gauge galvanized welded-wire mesh with 1-1/2" x 3" openings.

Front Frame: 14-gauge galvanized steel; 1-1/2" x 1-1/2" x 90" angle.

Header Bar: 14-gauge galvanized steel 3-1/2" x 1" channel.

Rear Vertical Members: 14-gauge galvanized steel; 1-1/2" x 1-1/2" x 90" angle.

Doors: 4-gauge galvanized welded-wire mesh with 1-1/2" x 3" openings. Full-height, hinged, anti-pry locking bar and padlock hasp. Single-tier door has three 2" x 2" steel pin butt hinges, 86" height; Double-tier door has two 2" x 2" steel pin butt hinges for each door.

Shelves: Double-tier unit includes 18-gauge galvanized sheet metal shelf.

Triple-tier unit includes two 18-gauge galvanized sheet metal shelves.

Finish: Galvanized.

Options:

- Locker top constructed of 4-gauge galvanized welded-wire mesh with 1-1/2" x 3" openings.
- Locker back constructed of 4-gauge galvanized welded-wire mesh with 1-1/2" x 3" openings, or 18-gauge galvanized sheet metal. Required for back-to-back units.
- Locker bottom constructed of 18-gauge galvanized sheet metal. Powder-coating finish.

*padlocks sold separately

Warranty: 1 year.









Stor-More® Tenant Storage Lockers Welded Wire Galvanized Steel



Stor-More® Tenant Storage Locker Single-Tier **Welded Wire Galvanized Steel**

| Starter Unit | | | Add-On Unit | | |
|--------------|-----------|------------|-------------|-----------|------------|
| Part No. | WxDxH | Wgt.(lbs.) | Part No. | WxDxH | Wgt.(lbs.) |
| ST133-GALV | 3'x3'x90" | 126 | AD133-GALV | 3'x3'x90" | 94 |
| ST134-GALV | 3'x4'x90" | 146 | AD134-GALV | 3'x4'x90" | 101 |
| ST135-GALV | 3'x5'x90" | 165 | AD135-GALV | 3'x5'x90" | 113 |
| ST143-GALV | 4'x3'x90" | 118 | AD143-GALV | 4'x3'x90" | 91 |
| ST144-GALV | 4'x4'x90" | 148 | AD144-GALV | 4'x4'x90" | 107 |
| ST145-GALV | 4'x5'x90" | 174 | AD145-GALV | 4'x5'x90" | 121 |

Stor-More® Tenant Storage Locker Double-Tier **Welded Wire Galvanized Steel**

| ST233-GALV | 3'x3'x90" | 154 | AD233-GALV | 3'x3'x90" | 122 |
|------------|-----------|-----|------------|-----------|-----|
| ST234-GALV | 3'x4'x90" | 182 | AD234-GALV | 3'x4'x90" | 139 |
| ST235-GALV | 3'x5'x90" | 208 | AD235-GALV | 3'x5'x90" | 156 |
| ST243-GALV | 4'x3'x90" | 166 | AD243-GALV | 4'x3'x90" | 134 |
| ST244-GALV | 4'x4'x90" | 195 | AD244-GALV | 4'x4'x90" | 151 |
| ST245-GALV | 4'x5'x90" | 222 | AD245-GALV | 4'x5'x90" | 168 |

Stor-More® Tenant Storage Locker Triple-Tier **Welded Wire Galvanized Steel**

| 3'x3'x90" | 154 | AD333-GALV | 3'x3'x90" | 122 |
|-----------|--|--|--|--|
| 3'x4'x90" | 182 | AD334-GALV | 3'x4'x90" | 139 |
| 3'x5'x90" | 208 | AD335-GALV | 3'x5'x90" | 156 |
| 4'x3'x90" | 166 | AD343-GALV | 4'x3'x90" | 134 |
| 4'x4'x90" | 195 | AD344-GALV | 4'x4'x90" | 151 |
| 4'x5'x90" | 222 | AD345-GALV | 4'x5'x90" | 168 |
| | 3'x4'x90" 3'x5'x90" 4'x3'x90" 4'x4'x90" | 3'x4'x90" 182 3'x5'x90" 208 4'x3'x90" 166 4'x4'x90" 195 | 3'x4'x90" 182 AD334-GALV 3'x5'x90" 208 AD335-GALV 4'x3'x90" 166 AD343-GALV 4'x4'x90" 195 AD344-GALV | 3'x4'x90" 182 AD334-GALV 3'x4'x90" 3'x5'x90" 208 AD335-GALV 3'x5'x90" 4'x3'x90" 166 AD343-GALV 4'x3'x90" 4'x4'x90" 195 AD344-GALV 4'x4'x90" |

Stor-More® Tenant Storage Locker Single-Tier Welded Wire Galvanized Steel - Complete (with top & back panel)

Starter Unit

| Part No. | WxDxH | Wgt.(lbs.) | |
|----------------|-----------|------------|--|
| ST133-GALV-COM | 3'x3'x90" | 126 | |
| ST134-GALV-COM | 3'x4'x90" | 146 | |
| ST135-GALV-COM | 3'x5'x90" | 165 | |
| ST143-GALV-COM | 4'x3'x90" | 118 | |
| ST144-GALV-COM | 4'x4'x90" | 148 | |
| ST145-GALV-COM | 4'x5'x90" | 174 | |

Stor-More® Tenant Storage Locker Double-Tier Welded Wire Galvanized Steel – Complete (with top & back panel)

| ST233-GALV-COM | 3'x3'x90" | 154 | |
|----------------|-----------|-----|--|
| ST234-GALV-COM | 3'x4'x90" | 182 | |
| ST235-GALV-COM | 3'x5'x90" | 208 | |
| ST243-GALV-COM | 4'x3'x90" | 166 | |
| ST244-GALV-COM | 4'x4'x90" | 195 | |
| ST245-GALV-COM | 4'x5'x90" | 222 | |

Stor-More® Tenant Storage Locker Triple-Tier Welded Wire Galvanized Steel – Complete (with top & back panel)

| ST333-GALV-COM | 3'x3'x90" | 154 | |
|----------------|-----------|-----|--|
| ST334-GALV-COM | 3'x4'x90" | 182 | |
| ST335-GALV-COM | 3'x5'x90" | 208 | |
| ST343-GALV-COM | 4'x3'x90" | 166 | |
| ST344-GALV-COM | 4'x4'x90" | 195 | |
| ST345-GALV-COM | 4'x5'x90" | 222 | |

Modular design makes Stor-More® lockers easy to plan, install, and relocate. Available in single- and double-tier units, and can be combined. Begin with starter unit, single- or double-tier; complete row with add-on units.

Single Tier






Triple Tier



| Add-On |
|-------------------|
| 1 Triple-tier doo |
| 1 Side panel |
| |

2 Shelves 2 Shelves



Add-On Starter

1 Double-tier door 1 Double-tier door 2 End-run panels 1 Side panel 1 Shelf 1 Shelf

Complete Unit




| Starter | Tier(s) |
|--------------------|---------|
| 1 Triple tier deer | 0.2 -11 |

0-2 shelves (specify) 1 Triple-tier door 2 End-run panels

1 Tip panel

1 Back panel

Single-row locker configurations installed against an existing wall do not require optional back panels. Double-row locker configurations share common back panels.



| Options | | | |
|----------------|--------|------------|--|
| Part No. | WxD | Wgt.(lbs.) | |
| Locker Tops | | | |
| LT33-GALV | 3'x3' | 6 | |
| LT34-GALV | 3'x4' | 6 | |
| LT35-GALV | 3'x5' | 8 | |
| LT43-GALV | 4'x3' | 6 | |
| LT44-GALV | 4'x4' | 8 | |
| LT45-GALV | 4'x5' | 8 | |
| Locker Backs | | | |
| SMBK3690-GALV | 3'x90" | 30 | |
| SMBK4890-GALV | 4'x90" | 40 | |
| Bottom Shelf | | | |
| LS33 | 3'x3' | 20 | |
| LS34 | 3'x4' | 25 | |
| LS35 | 3'x5' | 30 | |
| LS43 | 4'x3' | 20 | |
| LS44 | 4'x4' | 25 | |
| LS45 | 4'x5' | 30 | |
| Powder-Coating | | | |

IN STOCK QuickShip)





Consult factory

Stor-More® Dispatcher Lockers Framed Welded Wire







Individually locked compartments for employee storage.

Sides: 12-gauge 1"x 1" welded-wire mesh, welded into frames.

Inner Side-Panel Door Frames: 14-gauge; 1-1/4" x 1-1/4" angle.

Outer Door Frames: 14-gauge; 1-1/2" x 1" channel.

Top, Bottom, and 2 Mid-Shelves: 14-gauge galvanized sheet metal. Bottom shelf sits 1-1/2" off finished floor.

Doors: 12-gauge 1" x 1" welded-wire mesh, welded into 14-gauge 1-1/4" x 1-1/4" angle frames; equipped with two steel pin butt hinges and padlock hasps per door.

Easy Assembly: Pre-punched components. Additional units can be easily connected via pre-punched holes.

Finish: Machine gray powder-coating, except for galvanized components.


Options: Rear door for loading material from behind.

Back panel: 12-gauge 1"x 1" welded-wire mesh.

Mesh top: 12-gauge 1"x 1" welded-wire mesh.

Warranty: 1 year.


















| 24"-WIDE | MODELS: | DEPTH GR | OWS BY 1. | 5" WHEN | A REAR ACCE | SS DOOR | IS INSTAL | LED | |
|-----------|---------|----------|-----------|---------|-------------|---------|-----------|--------|--------|
| Part No. | Width | Depth | Height | Weight | Part No. | Width | Depth | Height | Weight |
| D1-2424-0 | 24" | 24" | 79.5" | 123 | D2-2430-0 | 24" | 31.5" | 79.5" | 146 |
| D1-2424-1 | 24" | 25.5" | 79.5" | 148 | D2-2430-2 | 24" | 31.5" | 79.5" | 146 |
| D1-2424-2 | 24" | 25.5" | 79.5" | 134 | D3-2430-0 | 24" | 30" | 79.5" | 143 |
| D1-2424-3 | 24" | 25.5" | 79.5" | 150 | D3-2430-1 | 24" | 31.5" | 79.5" | 165 |
| D2-2424-0 | 24" | 24" | 79.5" | 109 | D3-2430-2 | 24" | 31.5" | 79.5" | 167 |
| D2-2424-1 | 24" | 25.5" | 79.5" | 134 | D1-2436-0 | 24" | 36" | 79.5" | 150 |
| D2-2424-2 | 24" | 25.5" | 79.5" | 134 | D1-2436-1 | 24" | 37.5" | 79.5" | 180 |
| D3-2424-0 | 24" | 24" | 79.5" | 125 | D1-2436-2 | 24" | 37.5" | 79.5" | 158 |
| D3-2424-1 | 24" | 25.5" | 79.5" | 150 | D1-2436-3 | 24" | 37.5" | 79.5" | 184 |
| D3-2424-2 | 24" | 25.5" | 79.5" | 152 | D2-2436-0 | 24" | 36" | 79.5" | 133 |
| D1-2430-0 | 24" | 30" | 79.5" | 142 | D2-2436-1 | 24" | 37.5" | 79.5" | 158 |
| D1-2430-1 | 24" | 31.5" | 79.5" | 165 | D2-2436-2 | 24" | 37.5" | 79.5" | 158 |
| D1-2430-2 | 24" | 31.5" | 79.5" | 146 | D3-2436-0 | 24" | 36" | 79.5" | 157 |
| D1-2430-3 | 24" | 31.5" | 79.5" | 167 | D3-2436-1 | 24" | 37.5" | 79.5" | 182 |
| D2-2430-0 | 24" | 30" | 79 5" | 121 | D3-2436-2 | 24" | 37 5" | 79 5" | 184 |




| D2-2430-0 | 24" | 30" | /9.5" | 121 | D3-2436-2 | 24" | 37.5" | /9.5" | 184 |
|-----------|---------|----------|-----------|---------|-------------|---------|-----------|--------|--------|
| 30"-WIDE | MODELS: | DEPTH GR | OWS BY 1. | 5" WHEN | A REAR ACCE | SS DOOF | IS INSTAL | LED | |
| Part No | Width | Depth | Height | Weight | Part No. | Width | Depth | Height | Weight |
| D1-3024-0 | 30" | 24" | 79.5" | 138 | D2-3030-0 | 30" | 31.5" | 79.5" | 162 |
| D1-3024-1 | 30" | 25.5" | 79.5" | 165 | D2-3030-2 | 30" | 31.5" | 79.5" | 162 |
| D1-3024-2 | 30" | 25.5" | 79.5" | 148 | D3-3030-0 | 30" | 30" | 79.5" | 161 |
| D1-3024-3 | 30" | 25.5" | 79.5" | 168 | D3-3030-1 | 30" | 31.5" | 79.5" | 186 |
| D2-3024-0 | 30" | 24" | 79.5" | 121 | D3-3030-2 | 30" | 31.5" | 79.5" | 189 |
| D2-3024-1 | 30" | 25.5" | 79.5" | 148 | D1-3036-0 | 30" | 36" | 79.5" | 176 |
| D2-3024-2 | 30" | 25.5" | 79.5" | 148 | D1-3036-1 | 30" | 37.5" | 79.5" | 203 |
| D3-3024-0 | 30" | 24" | 79.5" | 141 | D1-3036-2 | 30" | 37.5" | 79.5" | 176 |
| D3-3024-1 | 30" | 25.5" | 79.5" | 171 | D1-3036-3 | 30" | 37.5" | 79.5" | 206 |
| D3-3024-2 | 30" | 25.5" | 79.5" | 159 | D2-3036-0 | 30" | 36" | 79.5" | 149 |
| D1-3030-0 | 30" | 30" | 79.5" | 186 | D2-3036-1 | 30" | 37.5" | 79.5" | 176 |
| D1-3030-1 | 30" | 31.5" | 79.5" | 162 | D2-3036-2 | 30" | 37.5" | 79.5" | 176 |
| D1-3030-2 | 30" | 31.5" | 79.5" | 146 | D3-3036-0 | 30" | 36" | 79.5" | 179 |
| D1-3030-3 | 30" | 31.5" | 79.5" | 189 | D3-3036-1 | 30" | 37.5" | 79.5" | 206 |
| D2-3030-0 | 30" | 30" | 79.5" | 135 | D3-3036-2 | 30" | 37.5" | 79.5" | 209 |



| D1-3030-3 | 30" | 31.5" | 79.5" | 189 | D3-3036-1 | 30" | 37.5" | 79.5" | 206 |
|---|-------|-------|--------|--------|-----------|-------|-------|--------|--------|
| D2-3030-0 | 30" | 30" | 79.5" | 135 | D3-3036-2 | 30" | 37.5" | 79.5" | 209 |
| 36"-WIDE MODELS: DEPTH GROWS BY 1.5" WHEN A REAR ACCESS DOOR IS INSTALLED | | | | | | | | | |
| Part No. | Width | Depth | Height | Weight | Part No. | Width | Depth | Height | Weight |
| D1-3624-0 | 36" | 24" | 79.5" | 161 | D2-3630-0 | 36" | 31.5" | 79.5" | 176 |
| D1-3624-1 | 36" | 25.5" | 79.5" | 187 | D2-3630-2 | 36" | 31.5" | 79.5" | 178 |
| D1-3624-2 | 36" | 25.5" | 79.5" | 166 | D3-3630-0 | 36" | 30" | 79.5" | 178 |
| D1-3624-3 | 36" | 25.5" | 79.5" | 193 | D3-3630-1 | 36" | 31.5" | 79.5" | 205 |
| D2-3624-0 | 36" | 24" | 79.5" | 140 | D3-3630-2 | 36" | 31.5" | 79.5" | 211 |
| D2-3624-1 | 36" | 25.5" | 79.5" | 166 | D1-3636-0 | 36" | 36" | 79.5" | 196 |
| D2-3624-2 | 36" | 25.5" | 79.5" | 168 | D1-3636-1 | 36" | 37.5" | 79.5" | 222 |
| D3-3624-0 | 36" | 24" | 79.5" | 167 | D1-3636-2 | 36" | 37.5" | 79.5" | 192 |
| D3-3624-1 | 36" | 25.5" | 79.5" | 193 | D1-3636-3 | 36" | 37.5" | 79.5" | 228 |
| D3-3624-2 | 36" | 25.5" | 79.5" | 199 | D2-3636-0 | 36" | 36" | 79.5" | 166 |
| D1-3630-0 | 36" | 30" | 79.5" | 175 | D2-3636-1 | 36" | 37.5" | 79.5" | 192 |
| D1-3630-1 | 36" | 31.5" | 79.5" | 201 | D2-3636-2 | 36" | 37.5" | 79.5" | 194 |
| D1-3630-2 | 36" | 31.5" | 79.5" | 176 | D3-3636-0 | 36" | 36" | 79.5" | 202 |
| D1-3630-3 | 36" | 31.5" | 79.5" | 207 | D3-3636-1 | 36" | 37.5" | 79.5" | 228 |
| D2-3630-0 | 36" | 30" | 79.5" | 150 | D3-3636-2 | 36" | 37.5" | 79.5" | 234 |
| | | | | | | | | | |







| ADDITIO | NAL SHELVE | S & HARI | OWARE | | |
|----------|------------|----------|----------|-----------|--------|
| Part No. | WxD | Weight | Part No. | WxD | Weight |
| DS-2424 | 24" x 24" | 12 | DS-3036 | 30" x 36" | 23 |
| DS-2430 | 24" x 30" | 15 | DS-3624 | 36" x 24" | 18 |
| DS-2436 | 24" x 36" | 18 | DS-3630 | 36" x 30" | 23 |
| DS-3024 | 30" x 24" | 15 | DS-3636 | 36" x 36" | 27 |
| DS-3030 | 30" x 30" | 19 | DS-ANC | Anchors | n/a |

TA-50 Military Lockers





Framed Welded Wire

An open-mesh design enables both quick visual inspection and ventilation. The hinged door features a high-security, 3-point locking system. Available in two standard sizes: 78"H x 42"W x 24"D and 78"H x 36"W x 24"D.

Application: Used by the U.S. Military for securing personnel's equipment and gear.



Advantages: Economical wire mesh design. Single or double door option.



Heavy-duty construction: TA-50 military lockers are constructed of heavy-gauge steel to withstand years of heavy use. Door, sides, and back are made of welded-wire mesh. Top and bottom shelves are flanged for increased stability. Features a tough, black, baked-on powder-coating finish.



Secure: TA-50 military lockers feature full-height doors with a 3-point locking system. The latching rod engages the top and bottom edges of the door frame, while a center latch engages the door jamb, enabling doors to latch on three sides. The door handle has a built-in padlock hasp.



Easy assembly: Components are welded and pre-punched for ease of assembly. All hardware is supplied. Bolts are not accessible from outside the locker.



Expanded Metal

Bi-parting, center-meeting doors feature a high-security, 3-point locking system. Standard size is 78"H x 42"W x 24"D.

Application: Used by the U.S. Military for securing personnel's equipment and gear.



Advantages: Double door design allows for more aisle space when doors are accessed. Meets standard military specifications.



Heavy-duty construction: Heavy-gauge steel; expanded metal doors and sides; flanged shelves.



Secure: Full-height doors with 3-point locking system; door latches on three sides and includes built-in padlock hasps.



Easy assembly: Components are welded and pre-punched for ease of assembly. All beginning the second of the secon for ease of assembly. All hardware is supplied. Bolts are not accessible from outside of locker.





Qwik-Fence® Pallet Rack Backing System







Protect your inventory from theft and guard your employees from unwanted work-related accidents.

The Qwik-Fence® Pallet Rack Backing System is designed to secure an existing pallet rack or bulk rack. The all-steel system surrounds the back to prevent unauthorized access and protects employees and customers from dangerous spills. The open-mesh design allows for quick visual inspection and will not deter sprinkler systems.

Panels: 8-gauge welded-wire mesh with 1-1/2" X 3" grid openings.

Brackets: Galvanized. Mounted directly to the front of the upright.

Installation: All assembly hardware supplied.

Finish: Galvanized. Powder-coated option available.

Options: Extra-high extension kit (for extending panels past uprights).

Warranty: 1 year.









Qwik-Fence® Pallet Rack Backing System LAYOUT SERVICES AND QUOTATION WORKSHEET





| Pallet Rack | Backing Systen | n |
|-------------|----------------|---------------|
| Part No. | WxH | Weight (Lbs.) |
| QR-0703 | 86.5" x 36" | 23 |
| QR-0803 | 98.5" x 36" | 25 |
| QR-0903 | 110.5" x 36" | 28 |
| QR-1003 | 122.5" x 36" | 31 |
| QR-1203 | 144.5" x 36" | 37 |
| QR-0704 | 86.5" x 48" | 29 |
| QR-0804 | 98.5" x 48" | 32 |
| QR-0904 | 110.5" x 48" | 36 |
| QR-1004 | 122.5" x 48" | 39 |
| QR-1204 | 144.5" x 48" | 45 |
| QR-0705 | 86.5" x 60" | 36 |
| QR-0805 | 98.5" x 60" | 39 |
| QR-0905 | 110.5" x 60" | 43 |
| QR-1005 | 122.5" x 60" | 48 |
| QR-1205 | 144.5" x 60" | 54 |



| Pallet Rack | Backing Panels – | Flush Mount |
|-------------|------------------|---------------|
| Part No. | WxH | Weight (Lbs.) |
| QR-0703-F | 86.5" x 36" | 22 |
| QR-0803-F | 98.5" x 36" | 24 |
| QR-0903-F | 110.5" x 36" | 27 |
| QR-1003-F | 122.5" x 36" | 30 |
| QR-1203-F | 144.5" x 36" | 36 |
| QR-0704-F | 86.5" x 48" | 28 |
| QR-0804-F | 98.5" x 48" | 31 |
| QR-0904-F | 110.5" x 48" | 35 |
| QR-1004-F | 122.5" x 48" | 38 |
| QR-1204-F | 144.5" x 48" | 44 |
| QR-0705-F | 86.5" x 60" | 35 |
| QR-0805-F | 98.5" x 60" | 38 |
| QR-0905-F | 110.5" x 60" | 42 |
| QR-1005-F | 122.5" x 60" | 47 |
| QR-1205-F | 144.5" x 60" | 53 |





| Offset Brackets | | | | | | | |
|-----------------|--------|---------------|-------------|--|--|--|--|
| Part No. | Offset | Weight (Lbs.) | Description | | | | |
| QR-4 | 4" | 2 | 4" Offset | | | | |
| QR-6 | 6" | 2 | 6" Offset | | | | |
| OR-8 | 8" | 2 | 8" Offset | | | | |

Qwik-Fence Rack Backing Bracket

(Size and qty. vary – hardware Included) Note: Hardware supplied to fit 3"-wide closed or open uprights. Flush bracket hardware included with flush mount panel.



| Above Rack – Adjustable Extension Kit | | | | | | |
|---------------------------------------|------------|---------------|--|--|--|--|
| Part No. | Size | Weight (Lbs.) | | | | |
| OR-EXT | Adiustable | 4 | | | | |





Saf-T-Store® Cylinder Cabinets











Compact storage for compressed gas cylinder tanks that protects them from damage, theft, and unauthorized access.

Advantages

Ready-to-Ship Standard Sizes: Variety of models provide horizontal, vertical, or a combination of gas cylinder storage configurations.

Heavy Duty: Panels are constructed of extra-thick 8-gauge galvanized welded wire with 1-1/2" square-angle frames. The 12-gauge, galvanized steel sloping roof sheds water and ice. A sturdy padlock hasp is standard on all Saf-T-Stor® gas cylinder storage cabinets.

Resists Corrosion and Rust: All material is galvanized steel to stand up to harsh indoor and outdoor environments.

Sign Included: OSHA-compliant "Danger Flammable Material" sign included.

Easy Assembly: Components (panels, frame, roof, and pre-hung door) are slotted for easy assembly with common hand tools.

Options: Powder-coating finish available in three colors.

Shipping: Cabinets ship knocked down at a low cost via UPS.

Warranty: 1 year.







Saf-T-Store® Cylinder Cabinets



Ultra-strength, all-galvanized construction with a space-saving footprint.

Panels: 4-gauge, galvanized welded-wire mesh with 1-1/2" x 3" nominal openings.

Frame: 14-gauge, galvanized steel, 1-1/2" square angle.

Door: 4-gauge, galvanized welded-wire mesh with 1-1/2" x 3" nominal openings. Steel butt hinges. Padlock hasp included.

Roof: 18-gauge, galvanized steel sloping roof.

Shelves: 1" square tube, 20-gauge; designed to accept standard cylinders.

OSHA- and NFP-Approved: Cabinets exceed OSHA 1910.110 requirements and NFP standard 58-79. OSHA-approved "Danger Flammable Material" sign included.

Installation: All hardware furnished. Components are slotted for easy assembly with common hand tools.

Finish: Galvanized. Powder-coat options available.

Shipping: Ships knocked-down.

Available Colors:

Galvanized (Standard)







| Part No. | WxDxH | Capacity | Weight (Lbs.) |
|-------------|-----------------------|--------------------|---------------|
| SAF-T-4 | 30.5" x 30.5" x 35.5" | 4 Horizontal | 66 |
| SAF-T-8 | 30.5" x 30.5" x 64.5" | 8 Horizontal | 130 |
| SAF-T-10 | 30.5" x 30.5" x 64.5" | 9 Vertical | 100 |
| SAF-T-16 | 61" x 30.5" x 64.5" | 16 Horizontal | 240 |
| SAF-T-Combo | 61" x 30.5" x 64.5" | 4 Horiz. & 9 Vert. | 210 |
| SAF-T-20 | 61" x 30.5" x 64.5" | 18 Vertical | 180 |

^{*}Nominal dimensions are outside-to-outside.





FoldingGuard.com

800-622-2214 | 5858 West 73rd Street Bedford Park, IL 60638 | Email: sales@foldingguard.com

