


# COMMERCIAL FLOORING

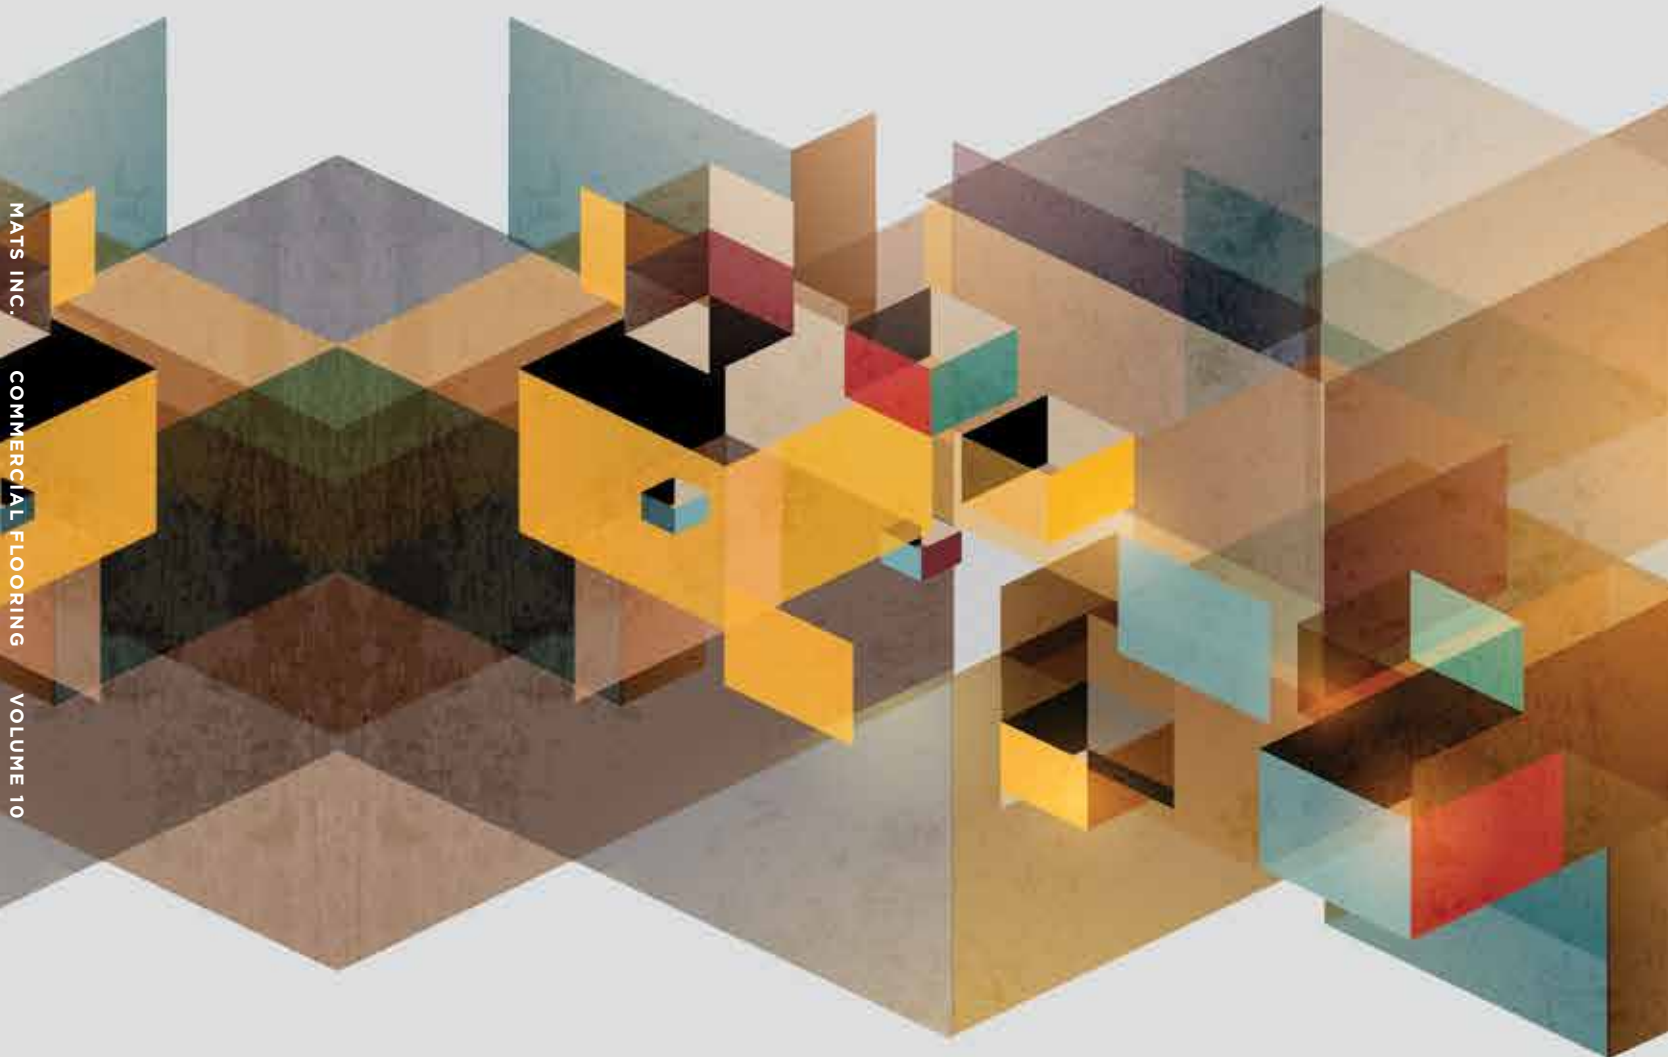

MATS INC.  
COMMERCIAL FLOORING  
VOLUME 10

■ ENTRANCE SYSTEMS

■ MATTING

■ SPORTS & FITNESS

■ CONTRACT

**matsinc.**<sup>®</sup>  
Every step of the way

# About Us matsinc.®

Every step of the way

Scott Robichaud  
President



John Schiffmann  
Owner



Richard Schiffmann  
Owner



Paul Schiffmann  
Owner

In 1971, Robert J. (Bob) Schiffmann began selling entrance mats to commercial businesses door-to-door. Mats Inc. is pleased to be operating in its second generation and leading the industry with innovative products and world-class service. We are a value-centered business, rich in tradition, innovation, and excellence, with a strong commitment to our employees, customers, and the communities in which we do business.

At the heart of Mats Inc.'s line of products is a full array of flooring solutions for commercial construction and renovation. Our headquarters location is in Stoughton, MA; we have a spacious warehouse in GA, sales offices throughout the United States and a network of dealers and distributors that deliver our products to the commercial markets.

From the finest entrance systems to superior interior matting products, high-performance sports flooring to distinctive contract flooring, we are continually updating and adding to our product line. Please visit our web site for the most up-to-date information, [www.matsinc.com](http://www.matsinc.com) or contact us at 1-800-628-7462.

We value your business and will make every effort to continue to meet your needs ... **every step of the way.**



TRADITION INNOVATION EXCELLENCE

## Additional Resources Available





For our newest green products, visit our website at [www.matsinc.com](http://www.matsinc.com) or call us at 1-800-MATS-INC (1-800-628-7462).

# ENCECLEANGREENBEAUTIFUL

## Clean, Green & Beautiful

At Mats Inc. we are committed to supporting environmentally-friendly practices in everything we do. From the small things like recycling our paper and packaging waste—to the big things like product design and development—our company is pro-actively managing our impact on the environment.

We are a proud member of the U.S. Green Building Council and many of our products can contribute to LEED projects. Our offering includes:

- Entrance systems designed to protect indoor air quality
- Fibered products that are Green Label Plus™ certified
- Foot grilles made from 100% recycled content
- Rubber products made from recycled tires
- Vinyl rolls and tiles that are FloorScore® certified
- No-wax, low maintenance, long-lasting distinctive flooring
- Low-emitting adhesives that contribute to healthy indoor air quality

We work with our suppliers and business partners to ensure the highest environmental standards. Our vendors are ISO certified, and we have partnered with large reclamation companies to minimize the environmental impacts of our products at the end of their useful life.

We're focused on clean, green and beautiful products because we believe it's the right thing to do.

We're not paying lip service to the environmental movement at Mats Inc. **We're living it.**



# Index

3M™ Nomad™ Carpet Matting 4000.....	37
3M™ Nomad™ Carpet Matting 5000.....	37
3M™ Nomad™ Carpet Matting 6500.....	36
3M™ Nomad™ Carpet Matting 8850.....	36
3M™ Nomad™ Carpet Matting Journey 7000™.....	35
3M™ Nomad™ Embossed Scraper Matting.....	33
3M™ Nomad™ Extreme Wall-to-Wall Carpet Matting 9800.....	25
3M™ Nomad™ Medium Traffic Backed Scraper Matting 6050.....	13
3M™ Nomad™ Modular Matting 9200.....	12
3M™ Nomad™ Printed Carpet Matting 6600.....	32
3M™ Nomad™ Unbacked 8100 & Backed 8150.....	13
3M™ Nomad™ Z-Web Extreme Traffic Scraper Matting 9100.....	14
3M™ Nomad™ Z-Web Medium Traffic Scraper Matting 6250.....	14
3M™ Safety-Walk™ Cushion Matting 3270.....	44
3M™ Safety-Walk™ Cushion Matting 5100.....	44
3M™ Safety-Walk™ Cushion Matting 5270.....	44
3M™ Safety-Walk™ Wet Area Matting 1500.....	47
3M™ Safety-Walk™ Wet Area Matting 3200.....	47
<b>A</b>	
Accessories.....	84
Activation Sport Tile.....	61
Adhesives.....	86
Advanced Track.....	4
Aluminum Framing.....	87
Anti-Fatigue Matting.....	42
Aqua Block.....	40
Aqua Block Tile.....	22
<b>B</b>	
Berber.....	27
Berber Eze.....	43
Berber Tile.....	19
Berber Vinylback.....	38

Berkshire.....	27
Bristle Mat™.....	41
Bubble Mat.....	45
<b>C</b>	
Calypso Tile.....	20
Chicago Collection™.....	25
Cleaners.....	85
CleanZone™.....	vi
Cocoa Mat.....	28
Combination Sport Tile.....	60
Contract Flooring.....	65
Cushion Eze.....	43
<b>D</b>	
Debolon Comfort.....	73
Debolon Comfort Spezial.....	74
Debolon Compact.....	72
Debolon MP.....	56
Debolon Rx™.....	75
Decathlon.....	63
Decathlon Design.....	63
Decorib.....	28
Design Print™.....	32
Design Track.....	2
Diagonal Tile.....	19
Diamond Block.....	39
Drain Tile.....	48
Dri Track.....	5
Dual Track.....	4
Duo Tile.....	62
<b>E</b>	
Eco Tile.....	48
Enterprise Tile™.....	21
Entrance Systems.....	1
Ergorunner.....	45
<b>F</b>	
Fitness.....	58
Floorazzo™ Gem.....	76
Floorazzo™ Marble.....	77
Floorworks® Charlestown™ Collection.....	69
Floorworks® Planks.....	66, 67
Floorworks® Tiles.....	68
Foot Grilles.....	1
FUSION System™.....	77
<b>G</b>	
Gameflex®.....	55
Geo Tile.....	22
Grate Grid.....	7

Grate Mat.....	8
Grate Mat XT.....	8
<b>I</b>	
Industrial Matting.....	42
<b>J</b>	
Journey Tile™.....	17, 82
<b>K</b>	
Kushion Safe.....	46
Kushion Safe Light.....	46
<b>L</b>	
Legacy.....	11
Legacy Nop.....	12
Legend.....	11
Levelers.....	88
Lock Mat.....	64
Logo Mats.....	29
<b>M</b>	
Mats.....	29, 34
Matting.....	23, 34, 42
MetroSteel™ Grate.....	7
miVantage™.....	v
Mixology™ Online.....	80
Modular Tiles.....	15
Multipurpose.....	52
MultiLino™.....	53
<b>N</b>	
New York Collection.....	24
Nosing.....	88
Nuway®.....	6
<b>O</b>	
Olefin.....	40
Outdoor.....	49
Outdoor & Rooftop Pavers.....	50
<b>P</b>	
Panorama Custom.....	80
Panorama Tile.....	78, 79
Pin Step.....	39
Precision Inlay Plush™.....	30
Precision Inlay™ Logo.....	31
Propel Tile™.....	64, 83
Pro Shield.....	57
Pro Track Series.....	2
PURline.....	70, 71
<b>R</b>	
Roll Goods.....	23
Runners.....	34

<b>S</b>	
Safe Track.....	3
SaniPath™.....	51
Sealers.....	85
Seattle Collection™.....	24
Skypath.....	51
Slip Not 2000 Tile.....	20
Soft Grid™.....	10
Soft Grid™ SB.....	10
Spectation™.....	59
Sports Flooring.....	52
Super Sport Weight Mat.....	64
Supreme Nop.....	26
Supreme Nop Tile.....	18
<b>T</b>	
Tapes.....	86
Tire Tile.....	21
Tough Rib.....	41
Transitions.....	88
Trilogy Tile™.....	16, 81
<b>U</b>	
Ultra Entry™.....	9
Ultra Entry™ SB.....	10
Ultra Track.....	2
Underfloor MC.....	85
Underfloor SL.....	55, 85
Underlayment.....	85
<b>W</b>	
Walk-Off Mats.....	34
Weight Rooms.....	58
Woodflex™.....	54

## Other icons



Rolls



Tiles



Recycled Content

# Table of Contents

- About Us** ..... ii
- Clean, Green & Beautiful** ..... iii
- The CleanZone™** ..... vi
- Foot Grilles** ..... 1
  - Pro Track Series ..... 2
  - Design Track ..... 2
  - Ultra Track ..... 2
  - Safe Track ..... 3
  - Advanced Track ..... 4
  - Dual Track ..... 4
  - Dri Track ..... 5
  - Nuway® ..... 6
  - Grate Grid ..... 7
  - MetroSteel™ Grate ..... 7
  - Grate Mat ..... 8
  - Grate Mat XT ..... 8
  - Ultra Entry™ ..... 9
  - Soft Grid™ ..... 10
  - Ultra Entry™ SB ..... 10
  - Soft Grid™ SB ..... 10
  - Legend ..... 11
  - Legacy ..... 11
  - Legacy Nop ..... 12
  - 3M™ Nomad™ Modular Matting 9200 ..... 12
  - 3M™ Nomad™ Medium Traffic Scraper Matting 6050 ..... 13
  - 3M™ Nomad™ Heavy Traffic Unbacked Scraper Matting 8100 & 3M™ Nomad™ Heavy Traffic Backed Scraper Matting 8150 ..... 13
  - 3M™ Nomad™ Z-Web Medium Traffic Scraper Matting 6250 ..... 14
  - 3M™ Nomad™ Z-Web Extreme Traffic Scraper Matting 9100 ..... 14
- Modular Tiles** ..... 15
  - Trilogy Tile™ ..... 16
  - Journey Tile™ ..... 17
  - Supreme Nop Tile ..... 18
  - Berber Tile ..... 19
  - Diagonal Tile ..... 19
  - Calypso Tile ..... 20
  - Slip Not 2000 Tile ..... 20
  - Enterprise Tile™ ..... 21
  - Tire Tile ..... 21
  - Geo Tile ..... 22
  - Aqua Block Tile ..... 22

- Matting: Roll Goods & Mats** ..... 23
  - New York Collection ..... 24
  - Seattle Collection™ ..... 24
  - Chicago Collection™ ..... 25
  - 3M™ Nomad™ Extreme Traffic Wall-to-Wall Carpet Matting 9800 ..... 25
  - Supreme Nop ..... 26
  - Berber ..... 27
  - Berkshire ..... 27
  - Decorib ..... 28
  - Cocoa Mat ..... 28
- Logo Mats** ..... 29
  - Precision Inlay Plush™ ..... 30
  - Precision Inlay™ Logo ..... 31
  - Design Print™ ..... 32
  - 3M™ Nomad™ Printed Carpet Matting 6600 ..... 32
  - 3M™ Nomad™ Embossed Scraper Matting ..... 33
- Matting: Walk-Off Mats & Runners** ..... 34
  - 3M™ Nomad™ Carpet Matting Journey 7000™ ..... 35
  - 3M™ Nomad™ Heavy Traffic Carpet Matting 8850 ..... 36
  - 3M™ Nomad™ Carpet Matting 6500 ..... 36
  - 3M™ Nomad™ Carpet Matting 5000 ..... 37
  - 3M™ Nomad™ Carpet Matting 4000 ..... 37
  - Berber Vinylback ..... 38
  - Pin Step ..... 39
  - Diamond Block ..... 39
  - Aqua Block ..... 40
  - Olefin ..... 40
  - Tough Rib ..... 41
  - Bristle Mat™ ..... 41
- Matting: Anti-Fatigue & Industrial** ..... 42
  - Berber Eze ..... 43
  - Cushion Eze ..... 43
  - 3M™ Safety-Walk™ Cushion Matting 3270 ..... 44
  - 3M™ Safety-Walk™ Cushion Matting 5100 ..... 44
  - 3M™ Safety-Walk™ Cushion Matting 5270 ..... 44
  - Bubble Mat ..... 45
  - Ergorunner ..... 45
  - Kushion Safe ..... 46
  - Kushion Safe Light ..... 46
  - 3M™ Safety-Walk™ Wet Area Matting 3200 ..... 47
  - 3M™ Safety-Walk™ Wet Area Matting 1500 ..... 47
  - Eco Tile ..... 48
  - Drain Tile ..... 48
- Outdoor** ..... 49
  - Outdoor & Rooftop Pavers ..... 50
  - SaniPath™ ..... 51
  - Skypath ..... 51

- Multipurpose** ..... 52
  - Multilino™ ..... 53
  - Woodflex™ ..... 54
  - Gameflex® ..... 55
  - Underfloor SL ..... 55
  - Debolon MP ..... 56
  - Pro Shield ..... 57
- Weight Rooms & Fitness** ..... 58
  - Spectation™ ..... 59
  - Combination Sport Tile ..... 60
  - Activation Sport Tile ..... 61
  - Duo Tile ..... 62
  - Decathlon ..... 63
  - Decathlon Design ..... 63
  - Lock Mat ..... 64
  - Super Sport Weight Mat ..... 64
  - Propel Tile™ ..... 64
- Contract Flooring** ..... 65
  - Floorworks® Planks ..... 66
  - Floorworks® Tiles ..... 68
  - Floorworks® Charlestown™ Collection ..... 69
  - PURline ..... 70
  - Debolon Compact ..... 72
  - Debolon Comfort ..... 73
  - Debolon Comfort Spezial ..... 74
  - Debolon Rx™ ..... 75
  - Floorazzo™ ..... 76
  - FUSION System™ ..... 77
  - Panorama Tile ..... 78
  - Panorama Custom ..... 80
  - Design Your Own Floor Online ..... 80
  - Trilogy Tile™ ..... 81
  - Journey Tile™ ..... 82
  - Propel Tile™ ..... 83
- Accessories** ..... 84
  - Cleaners & Sealers ..... 85
  - Underlayment ..... 85
  - Underfloor SL ..... 85
  - Underfloor MC ..... 85
  - Adhesives ..... 86
  - Tapes ..... 86
  - Aluminum Framing ..... 87
  - Nosing, Transitions & Levelers ..... 88

## miVantage™

With such a wide range of products, customers often request our assistance to help select the best product for the project application. Products with *miVantage™* have a particular advantage noted, which may assist you with your product selection.

Of course, you can always contact a *Product Specialist* to answer your questions.

**800-MATS-INC (800-628-7462) INFO@MATSINC.COM**

*miVantage™  
Ultra durable  
design and  
reversible for  
extended life*




# The CleanZone™

ZONES 1 2 3 4


The CleanZone™ entrance system protects against liability, reduces maintenance costs and facilitates healthy indoor air quality.

Look for the CleanZone™ number in the features section on each product page.

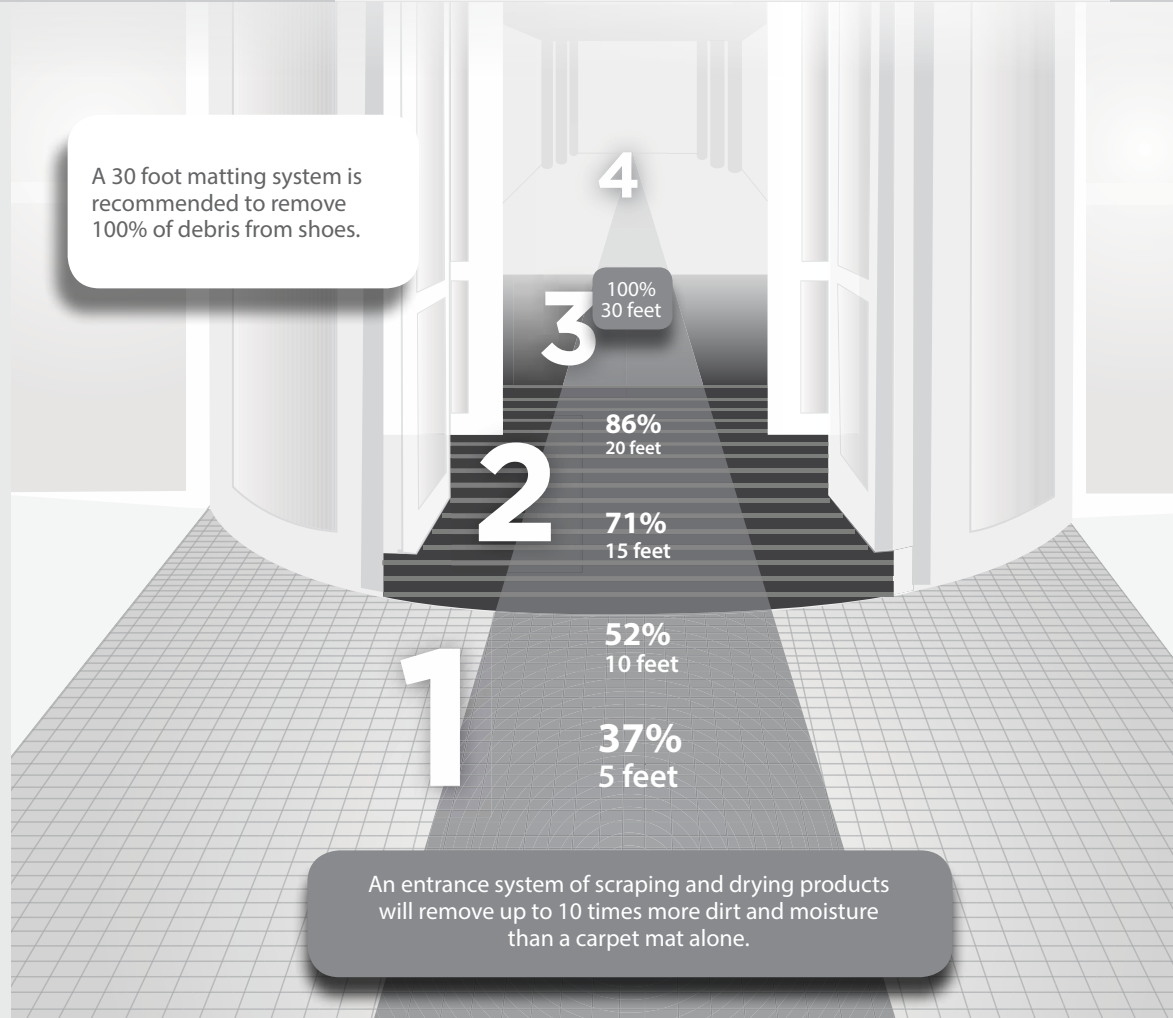

## Zone 1: Exterior

Outside the entrance, choose an aggressive scraping product that is as maintenance-free as possible.




## Zone 2: Vestibule

Between the exterior and interior doors, choose a product that scrapes off soil and absorbs moisture.



## Zone 3: Lobby

In lobby areas, nylon fibers offer optimal performance for additional moisture absorption. Polypropylene fibers are ideal for applications requiring additional debris removal.

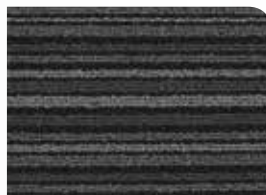

## Zone 4: Interior

For interior flooring, choose a style/performance combination best suited for the application.



# Foot Grilles

ZONES 1 2 3 4



# Design Track

## Deep Recessed System



# Pro Track Series



**Features**

**Zones** 1 2 3 4

Upscale appearance adds prestige to any environment  
 Exclusive, cross-bolt technology outlasts traditional welded key-lock construction  
 Outstanding scraping performance for entrances with multi-directional traffic  
 Anti-slip surface for exterior and interior applications; ADA compliant  
 Maintenance-free surface looks brand new for years  
 Frames come pre-assembled  
 Custom shapes available (not recommended for radius cuts)  
 Drain pan option available  
 Common Uses—Entryways in office buildings, retail stores, malls, hospitals, schools, transportation buildings, sporting facilities, hotels

**miVantage™**  
 Best for Zone 1 and heaviest traffic and rolling loads

**Pro Track Technology**

Pro Track Series Foot Grilles feature cross-bolt supports with individual aluminum spacers to accommodate the heaviest rolling loads in the industry. Cross-bolt technology provides durable, long-lasting performance.

**Specifications**


**Material**  
 Heavy gauge 6061-T6 aluminum with 64% pre-consumer and 16% post-consumer recycled content, mill finish  
**Style**  
 Cross-cut rectangular surface with bolted cross supports  
**Size**  
 Custom made to your requirements. Consult our Product Specialists for assistance.  
**Maximum Panel Size**  
 48" (front to back) x 42" (left to right)  
 Multiple panels are used to construct the foot grille system

**Possible LEED v 2009 Credits**

MR Credit 2 (1-2 points)  
 MR Credit 4 (1-2 points)  
 MR Credit 5 (1-2 points)  
 IEQ Credit 5 (1 point)

**Maximum Rolling Load**  
 Pounds per wheel for Level Base Installation

2' Span	2' 8" Span	3' 6" Span
2,796	1,900	1,372

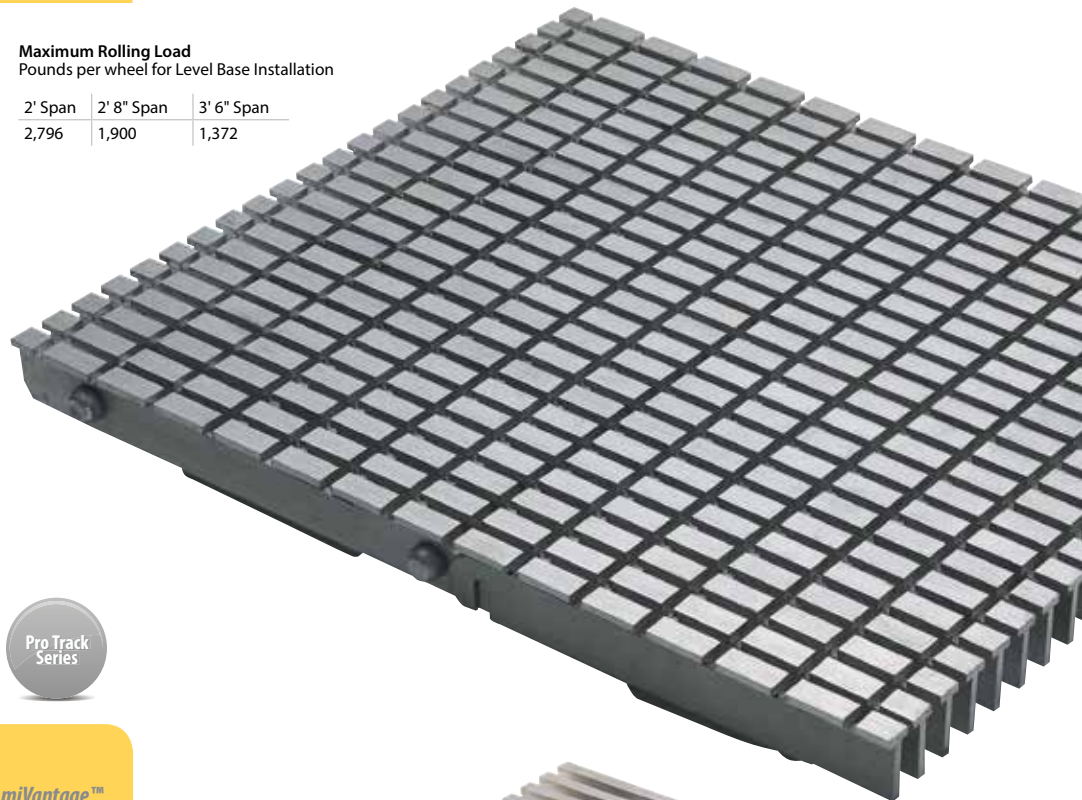

# Ultra Track

## Deep Recessed System



**Features**

**Zones** 1 2 3 4

Exclusive, cross-bolt technology outlasts traditional welded key-lock construction  
 Anti-slip surface for indoor applications; ADA compliant  
 Maintenance-free surface looks brand new for years  
 Unique "T" blade design prevents debris from lodging within the grille  
 Custom shapes available  
 Frames come pre-assembled  
 Best choice for radius cuts and revolving doors  
 Drain pan option available  
 Common Uses—Entryways in office buildings, retail stores, malls, transportation buildings, sporting facilities, schools

**miVantage™**  
 A stainless steel look with better slip resistance, durability and value

**Specifications**


**Material**  
 Heavy gauge 6061-T6 aluminum with 64% pre-consumer and 16% post-consumer recycled content, mill finish  
**Style**  
 Linear rails with bolted cross supports  
**Size**  
 Custom made to your requirements. Consult our Product Specialists for assistance.  
**Maximum Panel Size**  
 48" (front to back) x 42" (left to right)  
 Multiple panels are used to construct the foot grille system

**Possible LEED v 2009 Credits**

MR Credit 2 (1-2 points)  
 MR Credit 4 (1-2 points)  
 MR Credit 5 (1-2 points)  
 IEQ Credit 5 (1 point)

**Maximum Rolling Load**  
 Pounds per wheel for Level Base Installation

2' Span	2' 8" Span	3' 6" Span
3,828	2,653	1,583

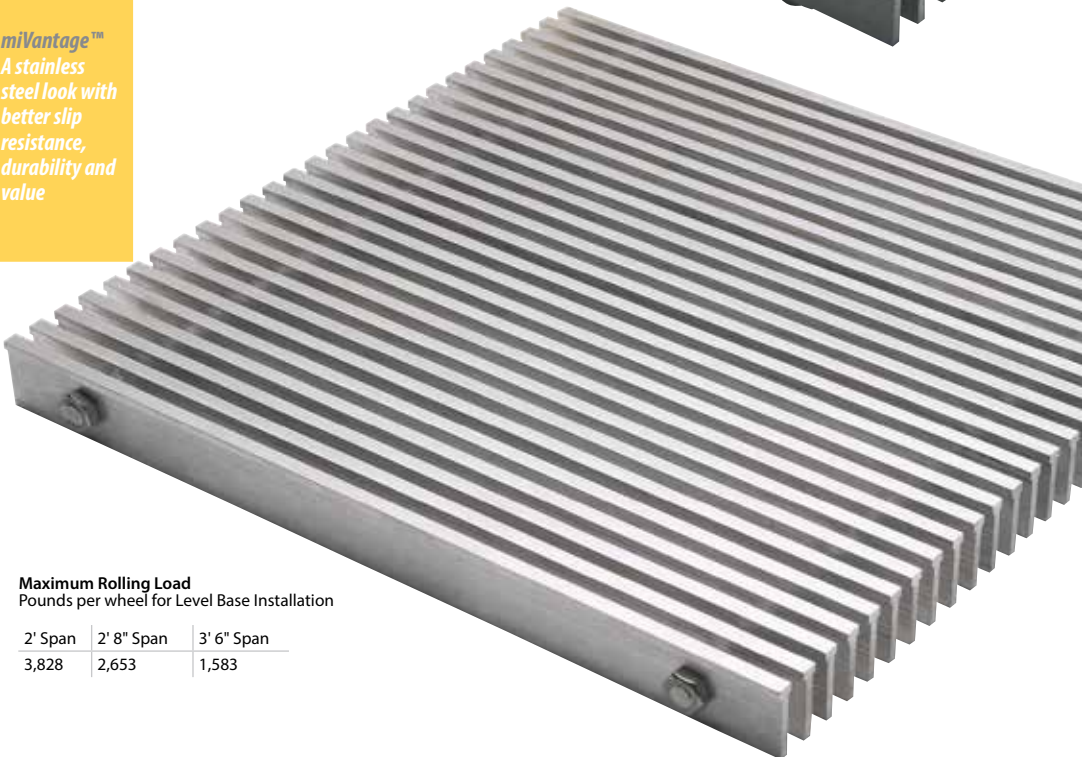





# Safe Track

## Deep Recessed System



### Features

### Zones

- 1
- 2
- 3
- 4

Anti-slip surface for indoor and outdoor applications; ADA compliant  
 Exclusive, cross-bolt technology outlasts traditional welded key-lock construction  
 Maintenance-free surface looks brand new for years  
 Custom shapes available (not recommended for radius cuts)  
 Frames come pre-assembled  
 Drain pan option available  
 Common Uses—Entryways in office buildings, retail stores, malls, hospitals, schools, ski resorts, sporting facilities, transportation buildings, hotels

*miVantage™*  
 Great for heavy traffic and rolling loads

### Maximum Rolling Load

Pounds per wheel for Level Base Installation

2' Span	2' 8" Span	3' 6" Span
2,032	1,394	827

### Specifications

**Material**  
 Heavy gauge 6061-T6 aluminum with 64% pre-consumer and 16% post-consumer recycled content, mill finish

**Style**  
 Cross-cut surface with bolted cross supports

**Size**  
 Custom made to your requirements. Consult our Product Specialists for assistance.

**Maximum Panel Size**  
 48" (front to back) x 42" (left to right)  
 Multiple panels are used to construct the foot grille system


Depth	VV or AD Frame (New Construction)	TT Overlap Frame (Retrofits)
Grille Only	1"	1"
Grille & Frame (Level Base)	1-1/8"	1"
Grille & Frame (Drain Pan)	2-1/8"	2"

### Possible LEED v 2009 Credits


- MR Credit 2 (1-2 points)
- MR Credit 4 (1-2 points)
- MR Credit 5 (1-2 points)
- IEQ Credit 5 (1 point)

### Level Base Installation Options


For Design Track, Ultra Track and Safe Track



VV EMBEDDED FRAME



TT OVERLAP FRAME



AD FRAME

Go to MatsInTV on YouTube to watch quick video on ProTrack foot grilles installation.




# Advanced Track

Deep Recessed System



# Dual Track

Deep Recessed System

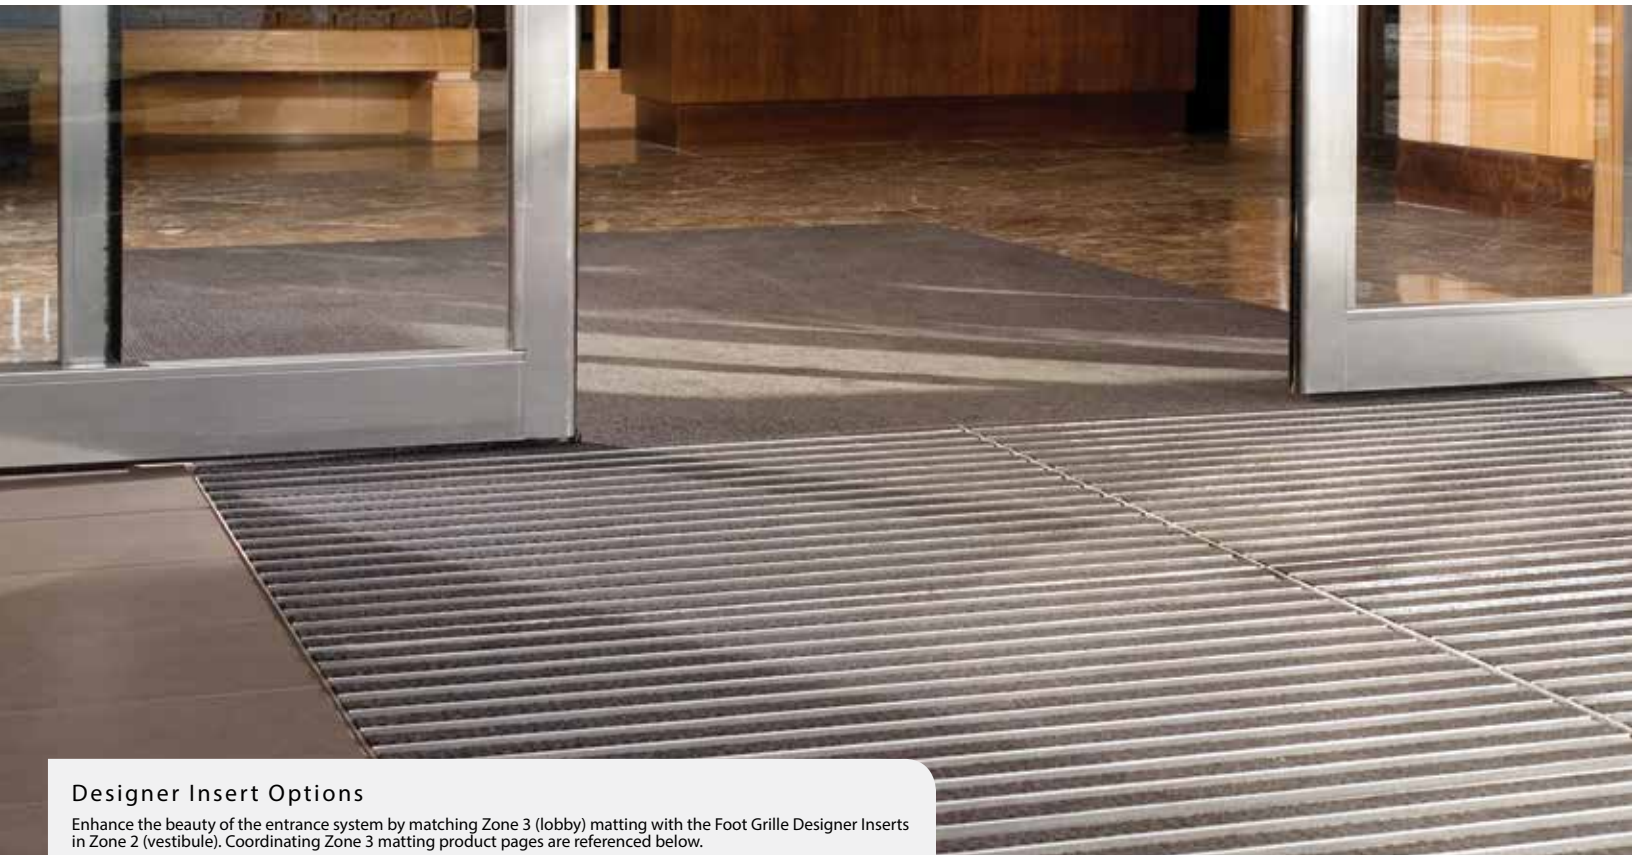

## Designer Insert Options


Enhance the beauty of the entrance system by matching Zone 3 (lobby) matting with the Foot Grille Designer Inserts in Zone 2 (vestibule). Coordinating Zone 3 matting product pages are referenced below.

See Page 26

**Supreme Nop** Aggressive and attractive polypropylene fiber



Charcoal    Black Walnut    Midnight Blue    Sapphire    Dark Gray



Sable Brown    Tweed Brown    Spruce    Autumn Red    Natural

See Page 24

**New York Collection** Premium high durability nylon fibers (6.6)



Charcoal Splash    Brown Sugar    Cocoa Butter    Blue    Red



Charcoal    Brown    Cocoa    Dark Gray    Light Gray

# Dri Track

Deep Recessed System



## Advanced Track, Dual Track and Dri Track

**miVantage™**  
Heaviest  
rolling load in  
the industry  
with a wide  
selection  
of Designer  
Insert Options

Features	Zones	1	2	3	4
----------	-------	---	---	---	---

Exclusive, cross-bolt technology outlasts traditional welded key-lock construction  
 Heaviest rolling load in the industry  
 Anti-slip surface for indoor applications; ADA compliant  
 Wide variety of Designer Insert Options available  
 Custom shapes available  
 Advanced Track and Dri Track can be radius cut  
 Frames come pre-assembled  
 Drain pan option available  
 Common Uses—Entryways in office buildings, retail stores, malls, hospitals, hotels, schools, libraries

### Specifications

**Advanced Track Material**  
 Heavy gauge 6061-T6 aluminum with aluminum alloy 6063-T5 scraping rails and standard 100% nylon fiber drying inserts. 58.62% pre-consumer and 15.5% post-consumer recycled content. Recycled content varies with Designer Insert Options.

**Dual Track Material**  
 Heavy gauge 6061-T6 aluminum with 43.97% pre-consumer and 14.12% post-consumer recycled content with standard 100% nylon drying inserts and vinyl scraper bars. Vinyl scraper bars available in black, gray and brown. Recycled content varies with Designer Insert Options.

**Dri Track Material**  
 Heavy gauge 6061-T6 aluminum with standard 100% nylon fiber drying inserts. 51.84% pre-consumer and 14.86% post-consumer recycled content. Recycled content varies with Designer Insert Options.

**Style**  
 Scraping and drying surface with bolted cross supports  
**Size**  
 Custom made to your requirements. Consult our Product Specialists for assistance.

**Maximum Panel Size**  
 48" (front and back) x 42" (left to right)  
 Multiple panels are used to construct the foot grille system

### Possible LEED v 2009 Credits

- MR Credit 2 (1-2 points)
- MR Credit 4 (1-2 points)
- MR Credit 5 (1-2 points)
- IEQ Credit 5 (1 point)


Depth	VV or AD Frame (New Construction)	TT Overlap Frame (Retrofits)
Grille Only	1-1/2"	1-1/2"
Grille & Frame (Level Base)	1-5/8"	1-1/2"
Grille & Frame (Drain Pan)	2-1/2"	2-1/2"

### Maximum Rolling Load


Pounds per wheel for Level Base Installation

	2' Span	2'8" Span	3'6" Span
Advanced Track	3,831	2,653	1,583
Dual Track	3,831	2,653	1,583
Dri Track	1,608	1,248	1,004


### Level Base Installation Options for Advanced Track

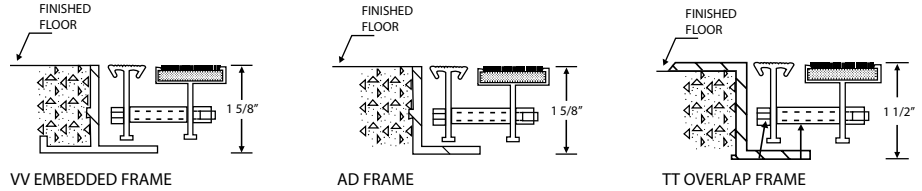

### Level Base Installation Options for Dual Track

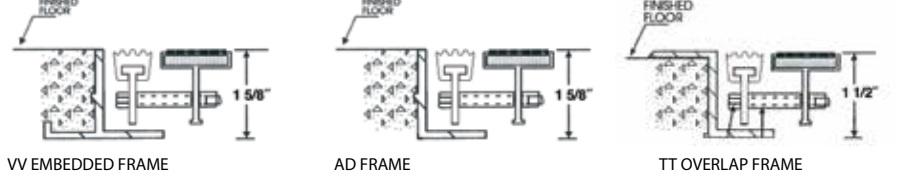

### Level Base Installation Options for Dri Track

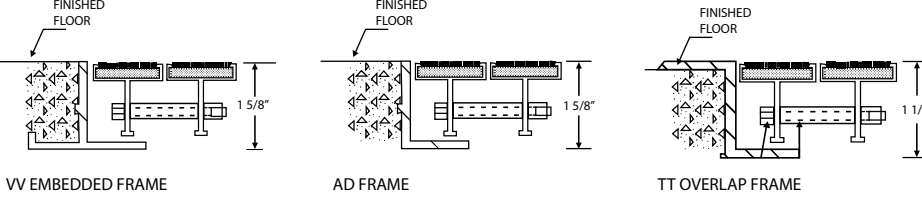


More product & color options  
 See Page 24 & 25



Chicago Collection™ Seattle Collection™

# Nuway® Surface/Recessed System

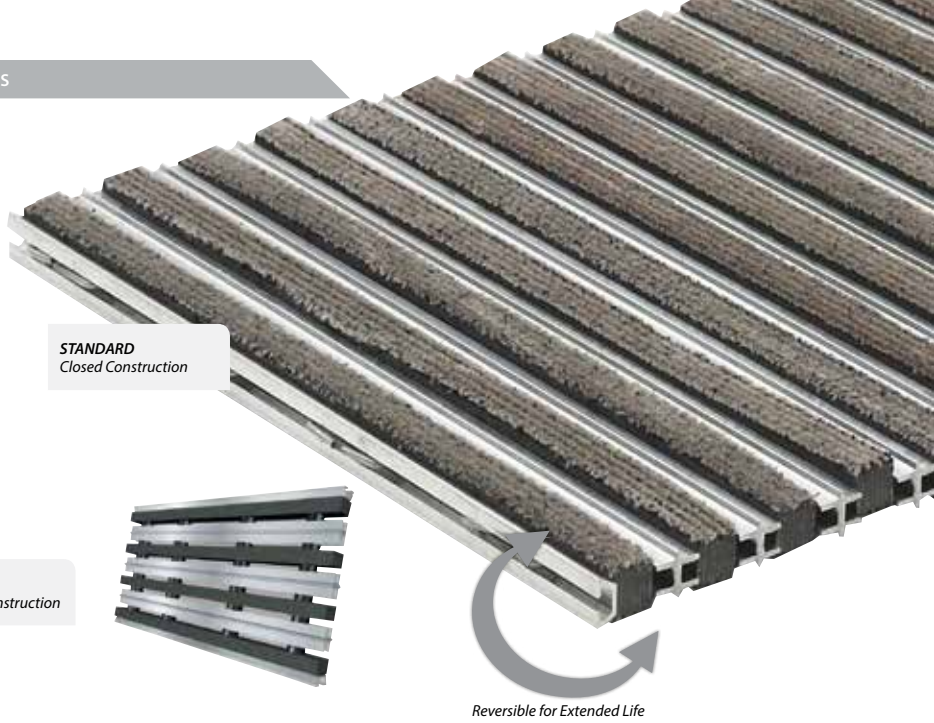

**Features**      **Zones**   1   2   3   4

Dual-strip design scrapes off debris and absorbs moisture  
 Reversible design doubles life span  
 Withstands heavy foot traffic and wheeled loads  
 Numerous design and color options  
 Anti-slip surface; ADA compliant  
 Specific configurations available for Zone 1  
 Common Uses—Entryways in office buildings, retail stores, malls, supermarkets, hospitals, schools, banks

*miVantage™  
Ultra durable  
design and  
reversible for  
extended life*

**Specifications**

**Material**  
 Alternating strips of aluminum scraper bars and wiper strips (buffed or unbuffed rubber) with 4.19-8.73% pre-consumer and 12.56-26.19% post-consumer recycled content

**Size**  
 Custom made to your requirements. Consult our Product Specialists for assistance.

**Thicknesses**  
 7/16" or 1 1/16"

**Coefficient of Friction**  
 (D2047) 0.79

**Styles**

**Standard**  
 12 mm, closed construction, Charcoal wiper strip, aluminum scraper bar

**Plainguard**  
 Unbuffed rubber wiper strip with aluminum scraper bar (Zones 1 & 2)

**Design**  
 Choice of colored buffed rubber wiper strip with aluminum scraper bar (Zone 2)

**Recycled Content**



**Standard**  
 8.73% pre-consumer and 26.19% post-consumer

**All Styles with Aluminum Scraper Bar**  
 4.19% - 8.73% pre-consumer and 12.56% - 26.19% post-consumer

**Possible LEED v 2009 Credits**

MR Credit 4 (1-2 points)  
 MR Credit 5 (1-2 points)  
 IEQ Credit 5 (1 point)

**Installation Options**

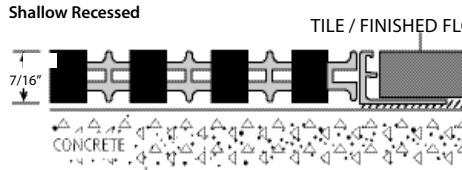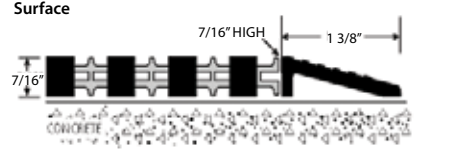

**STANDARD**  
 Closed Construction

**PLAINGUARD**  
 Optional Open Construction

Reversible for Extended Life

Depth	Ramp Frame	Schlüter™ Frame	Deep Frame
Grille Only	7/16"	7/16"	7/16" or 11/16"
Grille & Frame	7/16"	7/16" to 1-9/16" *	1-1/4"

\*Varies based on model selected



**Wiper Strips**



**Nuway® HD**

Heavy duty, closed construction foot grille for heavy traffic with high point loads. Scraper bars are constructed of an extremely thick gauge aluminum extrusion and combined with dual wiper strips to produce a system ideal for hospitals, train stations, airports and more. Contact our Product Specialists for more information.



# Grate Grid

Recessed System

Features	Zones	1	2	3	4
----------	-------	---	---	---	---

Durable "I"-beam construction secured with key-lock bars  
 Insert options include carpet, vinyl, brush, vinyl abrasive, and serrated aluminum; visit our website or consult our Product Specialists for assistance  
 Common Uses—entryways

### Specifications

**Material**  
 6063-T52 aluminum with 46% pre-consumer recycled content and various insert options  
**Size**  
 Consult our Product Specialists for assistance


### Possible LEED v 2009 Credits

MR Credit 4 (1-2 points)  
 MR Credit 5 (1-2 points)  
 IEQ Credit 5 (1 point)

Depth	
Grille Only	Grille & Frame
1-3/4"	2"



Brush Insert Option

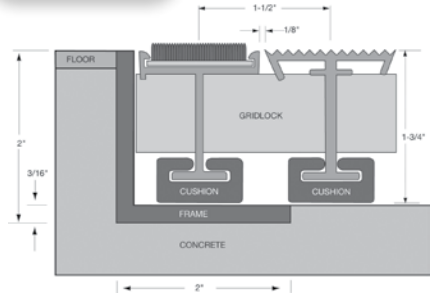

# MetroSteel™ Grate

Recessed System

Features	Zones	1	2	3	4
----------	-------	---	---	---	---



Contemporary linear design  
 Weather resistant stainless steel  
 Maintenance-free surface  
 Custom shapes available  
 Common Uses—Entryways in office buildings, hotels, schools, transportation buildings, hospitals

### Specifications

**Material**  
 Type 304 stainless steel containing 80% pre-consumer recycled content  
**Style**  
 Linear wire rails with resistance welded support rods  
**Size**  
 Custom made to your requirements. Consult our Product Specialists for assistance.  
**Thicknesses**  
 3/8", 5/8", 1-1/8"

### Possible LEED v 2009 Credits

MR Credit 4 (1-2 points)  
 MR Credit 5 (1-2 points)  
 IEQ Credit 5 (1 point)

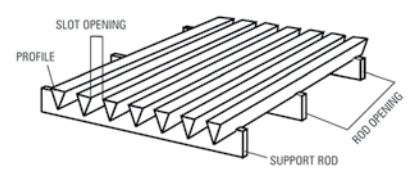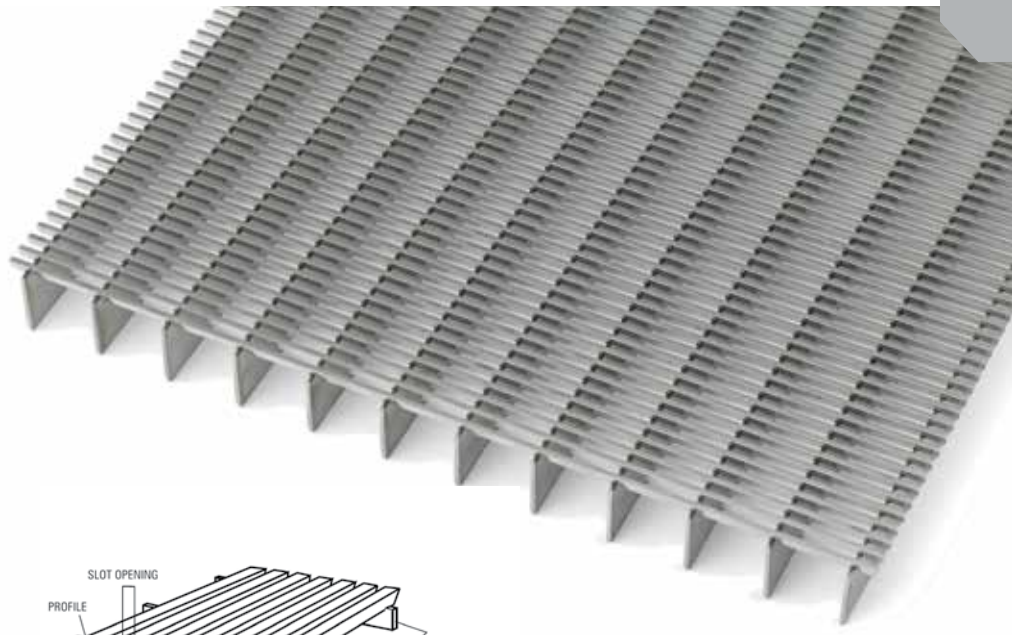

# Grate Mat


Surface/Recessed System

Features	Zones
<p>Grate Mat "rolls up" for easy handling and maintenance</p> <p>Polypropylene brush insert offers highest performance and durability</p> <p>Insert options include carpet, vinyl, brush, vinyl abrasive, and serrated aluminum; visit our website or consult our Product Specialists for assistance</p> <p>Common Uses—interior entry ways</p>	<p>1 2 3 4</p>
<p><b>Specifications</b></p> <p><b>Material</b> 6063-T52 aluminum with 49% pre-consumer recycled content and various insert options</p> <p><b>Style</b> Aluminum or rubber hinges</p> <p><b>Size</b> Custom made to your requirements. Consult our Product Specialists for assistance.</p> <p><b>Options</b> Surface mount ramp frame or recessed frame</p>	
<p><b>Possible LEED v 2009 Credits</b></p> <p>MR Credit 4 (1-2 points)</p> <p>MR Credit 5 (1-2 points)</p> <p>IEQ Credit 5 (1 point)</p>	



**Depth**

Grille Only	Grille & Ramp Frame	Grille & Deep Frame
3/8"	3/8"	7/16"

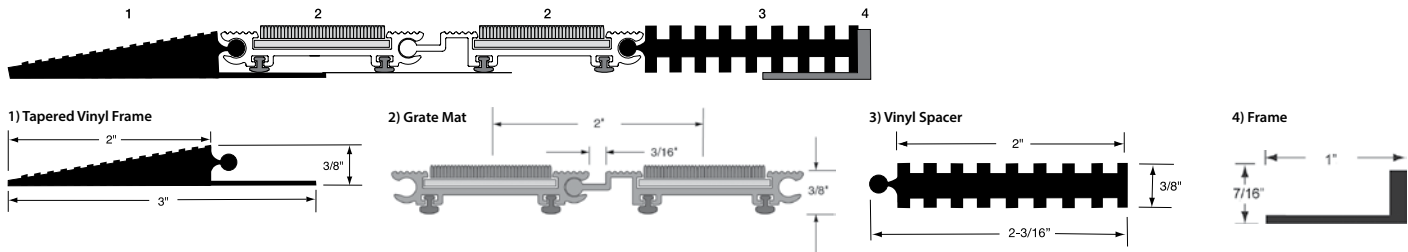

# Grate Mat XT


Recessed System

Features	Zones
<p>The rugged benefits of a foot grille with the easy maintenance of a roll up mat</p> <p>Polypropylene brush insert offers highest performance and durability</p> <p>Thermoplastic hinge is weather-resistant and stays flexible—won't crack or break like PVC-based materials</p> <p>Insert options include carpet, vinyl, brush, vinyl abrasive and serrated aluminum</p> <p>Consult our Product Specialists for assistance</p> <p>Common Uses—interior entryways</p>	<p>1 2 3 4</p>
<p><b>Specifications</b></p> <p><b>Material</b> Corrosion-resistant 6063-T52 aluminum with 38.3-45.8% pre-consumer recycled content and various insert options fusion bonded to the backing for durability</p> <p><b>Additional Specs</b> 6063-T52 aluminum spaced 1-1/2" on the center and connected with thermoplastic rubber hinges with 1/8" slotted holes for maximum drainage</p> <p><b>Size</b> Custom made to your requirements. Consult our Product Specialists for assistance.</p> <p><b>Maximum Rolling Load</b> Up to 1,000 lbs per wheel</p>	
<p><b>Possible LEED v 2009 Credits</b></p> <p>MR Credit 4 (1-2 points)</p> <p>MR Credit 5 (1-2 points)</p> <p>IEQ Credit 5 (1 point)</p>	



**Depth**

Grille Only	Grille & Recessed Frame
3/4"	1-3/32"

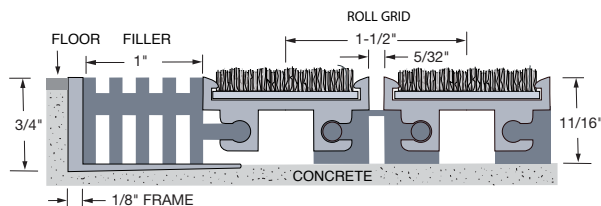

# Ultra Entry™

## Surface/Shallow Recessed System

### Features

- Dual-strip design both scrapes off debris and absorbs moisture
- Easily cut on site to any angle, arc or shape
- Durable construction withstands heavy traffic
- Quiet—eliminates noise and clatter common with aluminum roll up mats
- Stable—conforms to uneven sub-floors
- Anti-slip surface for indoor applications; ADA compliant
- T section divider is optional for wheeled traffic applications
- Can be used with Schlüter™ frame option
- Common Uses—Entryways in supermarkets, retail stores, malls, office buildings, schools, hospitals, sports arenas, airports

### Zones

- 1
- 2
- 3
- 4

*miVantage™*  
Great alternative to aluminum roll mats

### Specifications

**Material**  
 Gray Base—27.52% pre-consumer and 1.4% post-consumer recycled content with standard New York inserts  
 Black Base—86% pre-consumer and 1.4% post-consumer recycled content with standard New York inserts. Recycled content varies with Designer Insert Options

#### Size

36" x 40', 48" x 40'

#### Custom Sizes

36" and 48" widths x lengths to 40'

#### Weight

1.71 lbs/sq ft

#### Maximum Rolling Load

1,200 pounds per wheel


#### Possible LEED v 2009 Credits

MR Credit 4 (1-2 points)

MR Credit 5 (1-2 points)

IEQ Credit 5 (1 point)

### Panel



Gray



Black




Brown

Depth	Surface Ramp Frame	Recessed R or J Frame
Grille Only	3/8"	3/8"
Grille & Frame	3/8"	R: 7/16" J: 5/8"





### Installation Options



#### Surface



#### Shallow Recessed



#### Optional Section Divider



### Designer Insert Options

Enhance the beauty of the entrance system by matching Zone 3 (lobby) matting with the Foot Grille Designer Inserts in Zone 2 (vestibule). Coordinating Zone 3 matting product pages are referenced below.

**New York Collection**  
Premium high durability nylon fibers (6.6)

See Page 24



Charcoal Splash



Brown Sugar



Cocoa Butter



Charcoal



Brown




Cocoa



Dark Gray




Light Gray

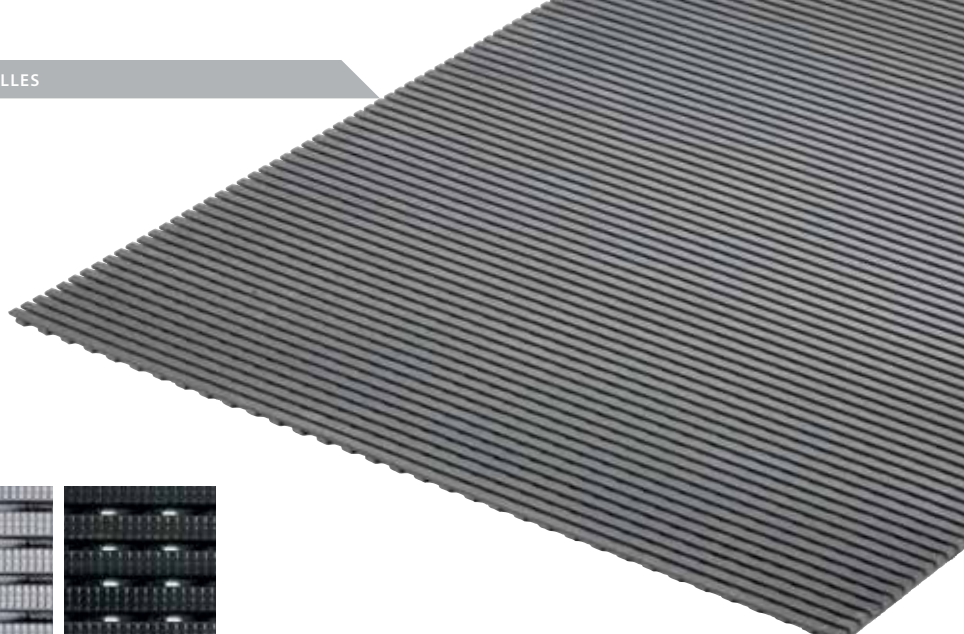

# Soft Grid™

Surface/Shallow Recessed System


Features	Zones	1	2	3	4
Durable construction withstands heavy traffic Easily cut on site to any angle, arc or shape Stable—conforms to uneven sub-floors Quiet—eliminates noise common with aluminum roll-up mats Anti-slip surface for indoor applications; ADA compliant Can be used with Schlüter™ frame Common Uses—Entryways in supermarkets, retail stores, malls, office buildings, schools, hospitals, factories, airports					
<b>Specifications</b>					
<b>Material</b> Vinyl drop-thru panel 100% pre-consumer recycled content in Black; 32% pre-consumer recycled content in Gray					
<b>Size</b> 36" x 30', 48" x 30'					
<b>Custom Sizes</b> 36" and 48" widths x lengths to 30'					
<b>Weight</b> 1.35 lbs/sq ft					
<b>Maximum Rolling Load</b> 1,200 per pounds wheel					
<b>Possible LEED v 2009 Credits</b>					
MR Credit 4 (1-2 points) MR Credit 5 (1-2 points) IEQ Credit 5 (1 point)					




Gray  
Standard Color

Black


Depth	Surface Ramp Frame	Recessed R or J Frame
Grille Only	3/8"	3/8"
Grille & Frame	3/8"	R: 7/16" J: 5/8"



### Installation Options

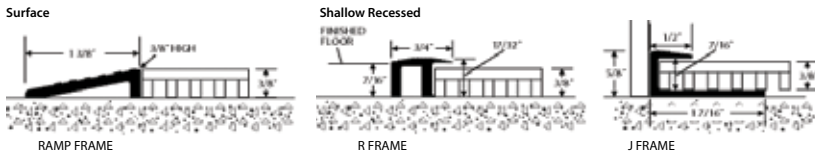

### Optional Section Divider




# Ultra Entry™ SB

Features	Zones	1	2	3	4
Low profile safely transitions to lower surfaces Dual design removes debris and absorbs moisture Easy to cut on site and no framing required for installation Simple cleaning with vacuum Common Uses— Entryways in supermarkets, retail stores, malls, office buildings, schools, hospitals, factories, airports					
<b>Specifications</b>					
<b>Material</b> Flexible vinyl grid with nylon fiber inserts					
<b>Backing</b> Vinyl					
<b>Size</b> 3' 3" x 33'					
<b>Thickness</b> 5/16"					
<b>Weight</b> 185.08 oz/sq yd					
<b>Installation</b> Glue Down (recommended for heavy traffic), Loose Lay					
<b>Possible LEED v 2009 Credits</b>					
IEQ Credit 5 (1 point)					




Black Anthracite



# Soft Grid™ SB

Features	Zones	1	2	3	4
Solid backing for glue down applications Low profile safely transitions to lower surfaces Accommodates extreme wheel traffic Removes dirt and debris and contains it below foot traffic Easy to cut onsite and no framing required for installation Textured anti-slip surface Simple cleaning with vacuum Common Uses— Entryways in supermarkets, retail stores, malls, office buildings, schools, hospitals, factories, airports					
<b>Specifications</b>					
<b>Material</b> One-piece heat welded flexible extruded PVC					
<b>Backing</b> Vinyl					
<b>Size</b> 3' 3" x 33'					
<b>Custom Sizes</b> 3' 3" widths x lengths to 33'					
<b>Thickness</b> 1/4"					
<b>Weight</b> 185.08 oz/sq yd					
<b>Installation</b> Glue Down (recommended for heavy traffic), Loose Lay					
<b>Possible LEED v 2009 Credits</b>					
IEQ Credit 5 (1 point)					




Black








# Legend




Features	Zones	1	2	3	4
<p>Ideal for outdoors—coarse inserts scrape away dirt before it gets in the building</p> <p>Drop-through design allows dirt to pass through material</p> <p>Common Uses—Entryways in ski resorts, sports facilities, office buildings</p>					
<p><b>Specifications</b> </p> <p><b>Material</b> Polypropylene base grid and premium polyamide nylon fibers (6.6)</p> <p><b>Backing</b> High density anti-slip rubber</p> <p><b>Size</b> 6' 7" x 65' 5" – to accommodate rib repeat in multiple applications, figure material at 6' 5"</p> <p><b>Custom Sizes</b> 6' 7" width x lengths to 65' 5"</p> <p><b>Weight</b> 106 oz/sq yd</p> <p><b>Thickness</b> 9/16"</p> <p><b>Pattern</b> Repeat</p> <p><b>Recommended Installation</b> Loose lay—Ultra Flex Nosing</p> <p><b>Custom Colors</b> Other non-stocking colors available; minimums may apply</p>					
<p><b>Possible LEED v 2009 Credits</b></p> <p>MR Credit 4 (1-2 points) IEQ Credit 5 (1 point)</p>					

**miVantage™**  
Great alternative to aluminum for Zone 1

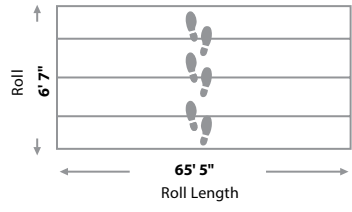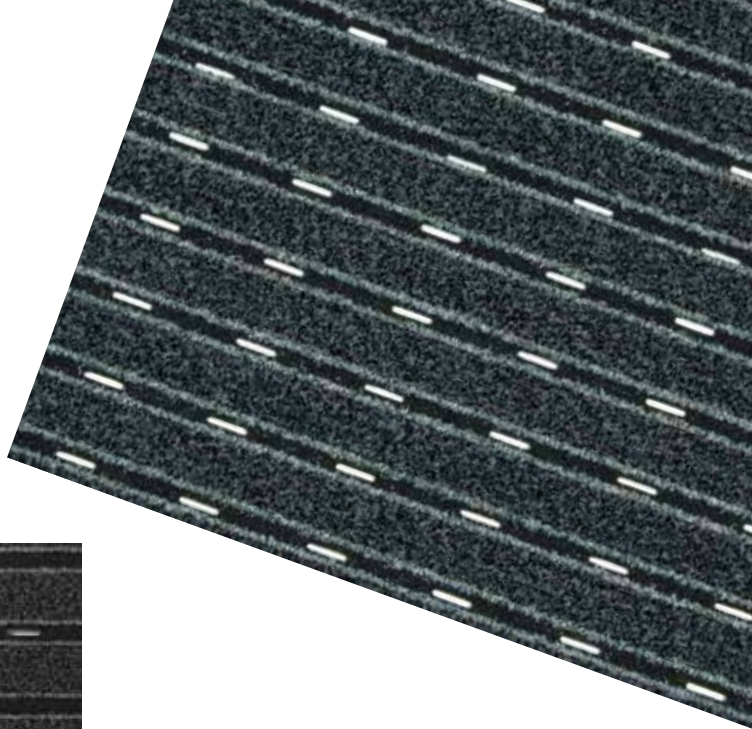

# Legacy

Features	Zones	1	2	3	4
<p>Patented hybrid product installs like a carpet and performs like a foot grille</p> <p>Can be cut to measure in any direction without fraying</p> <p>Combines top-of-the-line fibers that both scrape dirt and absorb moisture</p> <p>Inserts integrate with a variety of design schemes</p> <p>Common Uses—high traffic vestibules and foyers in retail stores, malls, office buildings, sports facilities, hotels, schools</p>					
<p><b>Specifications</b> </p> <p><b>Material</b> Polypropylene Base Grid and Premium Polyamide Nylon Fibers (6.6) with 5.63% post-consumer recycled content</p> <p><b>Backing</b> Anti-slip rubber</p> <p><b>Size</b> 6' 7" x 65' 5" – to accommodate rib repeat in multiple applications, figure material at 6' 5"</p> <p><b>Custom Sizes</b> 6' 7" width x lengths to 65' 5"</p> <p><b>Weight</b> 103 oz/sq yd</p> <p><b>Thickness</b> 9/16"</p> <p><b>Pattern</b> Repeat</p> <p><b>Recommended Installation</b> Loose lay—Ultra Flex Nosing Glue down—Mats Inc. Multi-Bond Adhesive</p> <p><b>Custom Colors</b> Other non-stocking colors available; minimums may apply</p>					
<p><b>Possible LEED v 2009 Credits</b></p> <p>MR Credit 4 (1-2 points) IEQ Credit 4.1 (1 point) IEQ Credit 5 (1 point)</p>					

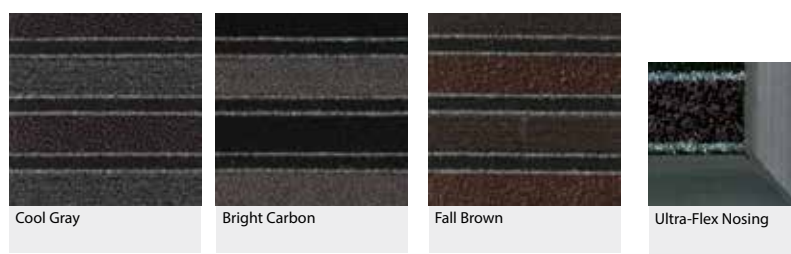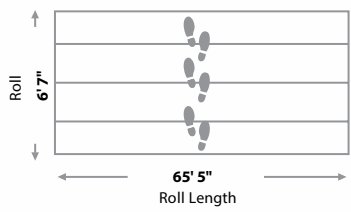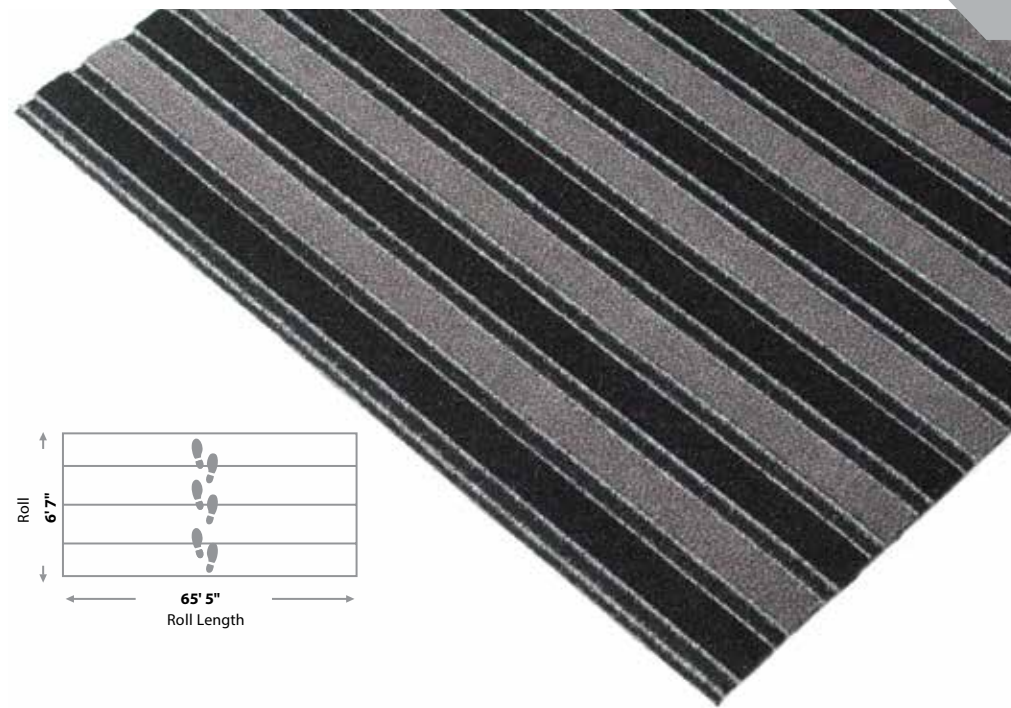


# Legacy Nop


Features	Zones	1	2	3	4
<p>Patented hybrid product installs like a carpet and performs like a foot grille</p> <p>Can be cut to measure in any direction without fraying</p> <p>Combines top-of-the-line fibers that both scrape dirt and absorb moisture</p> <p>Common Uses—high traffic vestibules and foyers in retail stores, malls, office buildings, sports facilities, schools</p>					
<p><b>Specifications</b></p> <p><b>Material</b> 100% polypropylene with 5.63% post-consumer recycled content</p> <p><b>Backing</b> Anti-slip rubber</p> <p><b>Size</b> 6' 7" x 65' 5" – to accommodate rib repeat in multiple applications, figure material at 6' 5"</p> <p><b>Custom Sizes</b> 6' 7" width x lengths to 65' 5"</p> <p><b>Weight</b> 103 oz/sq yd</p> <p><b>Thickness</b> 9/16"</p> <p><b>Pattern</b> Repeat</p> <p><b>Recommended Installation</b> Loose lay—Ultra Flex Nosing Glue down—Mats Inc. Multi-Bond Adhesive</p> <p><b>Custom Colors</b> Other non-stocking colors available; minimums may apply</p>					
<p><b>Possible LEED v 2009 Credits</b></p> <p>MR Credit 4 (1-2 points) IEQ Credit 4.1 (1 point) IEQ Credit 5 (1 point)</p>					

*miVantage™*  
Use with matching Supreme Nop colors in Zone 3 for an attractive and coordinated entrance system

See page 26



Gray-Black



Charcoal



Black Walnut



Ultra-Flex Nosing

# 3M™ Nomad™ Modular Matting 9200

Features	Zones	1	2	3	4
<p>Designed for MEDIUM traffic conditions Up to 400,000 people/year</p> <p>High-performance, flexible tiles with a vinyl base and dual-fiber carpet strips scrape, remove and capture dirt and moisture</p> <p>Resistance to mildew and UV aging</p> <p>Tiles easily snap together and can be cut for custom fit</p> <p>Grooves are large enough to effectively trap dirt but small enough to prevent high heels from getting stuck</p>					
<p><b>Specifications</b></p> <p><b>Tile Size</b> 7.87" x 7.87"</p> <p>10 tiles (4.3 sq ft) per case</p> <p><b>Edging</b> Not recommended</p>					
<p><b>Possible LEED v 2009 Credits</b></p> <p>MR Credit 5 (1-2 points)</p>					

*miVantage™*  
Easy-to-install modular tile for recessed well applications



Gray



**3M**  
Authorized Master Distributor  
Entrance and Work Area Matting

# 3M™ Nomad™ Medium Traffic Scraper Matting 6050

Features	Zones	1	2	3	4
<p>Designed for MEDIUM traffic conditions Up to 400,000 people/year</p> <p>Vinyl loops scrape, trap and hide dirt and moisture, minimizing re-tracking into the building</p> <p>Cushioned vinyl backing protects floors from removed soil and will not stain flooring</p> <p>Durable vinyl construction performs in temperatures from -10°F to 150°F (-23°C to 65°C)</p> <p>Fade resistant</p>					
<b>Specifications</b>					
<p><b>Roll Sizes</b> 3' and 4' x 60'</p> <p>Longer rolls readily available</p> <p>† Logo colors 4' x 60'</p> <p><b>Standard Mat Sizes</b> 3' x 5'; 4' x 6'; 3' x 20'; 4' x 20'</p> <p><b>Custom Sizes</b> 3' and 4' widths x custom lengths up to 60'</p> <p>† Logo colors 4' width x custom lengths up to 20'</p> <p>* Red, Blue and Green 3' width x custom lengths up to 20'</p> <p>Seaming is also available</p>					
<b>Possible LEED Credits</b>					
MR Credit 5 (1-2 points)					

**miVantage™**  
Durable vinyl construction performs in temperatures from -10°F to 150°F (-23°C to 65°C)



**Standard Edging**  
Heat embossed on all sides  
**Custom Options Available**

**3M**  
Authorized Master Distributor  
Entrance and Work Area Matting

# 3M™ Nomad™ Heavy Traffic Unbacked Scraper Matting 8100 & 3M™ Nomad™ Heavy Traffic Backed Scraper Matting 8150

Features	Zones	1	2	3	4
<p>Designed for HEAVY traffic conditions Up to 1,000,000 people/year</p> <p>Durable vinyl loops scrape, trap and hide dirt and moisture, minimizing re-tracking into the building</p> <p>Provides resistance to grease and oil</p> <p>8150 Backed mat can be used for indoor applications and protects floor surfaces in Zone 3</p>					
<b>Specifications</b>					
<p><b>Roll Sizes</b> 3' and 4' widths x 60' length</p> <p>Longer rolls readily available</p> <p><b>Standard Mat Sizes</b> 3' x 5'; 4' x 6'; 3' x 20'; 4' x 20'</p> <p><b>Custom Sizes</b> 3' and 4' widths x custom lengths up to 60'</p> <p>Seaming is also available</p>					
<b>Possible LEED Credits</b>					
MR Credit 5 (1-2 points)					

**miVantage™**  
Best 3M™ Nomad™ Scraper Matting for removing and hiding dirt in heavy traffic areas




**Standard Edging**  
For 3' x 5' and 4' x 6' mats in Black, Gray and Brown  
**8150**  
Heat embossed on all sides  
**8100**  
Heat embossed on short sides  
**Custom Options Available**

**3M**  
Authorized Master Distributor  
Entrance and Work Area Matting


# 3M™ Nomad™ Z-Web Medium Traffic Scraper Matting 6250

Features	Zones	1	2	3	4
<p>Designed for MEDIUM traffic conditions Up to 400,000 people/year</p> <p>Peaked edge design provides enhanced slip resistance while scraping dirt and debris</p> <p>Solid vinyl backing helps protect floors from removed soil and will not stain the floor</p> <p>Durable z-web construction provides excellent support for light wheeled traffic such as carts and wheelchairs</p> <p>Effectively traps and holds moisture making it ideal for use by drink stations and water fountains</p>					
<b>Specifications</b>					
<p><b>Roll Sizes</b> 3' and 4' x 60'</p> <p>Longer rolls readily available</p> <p><b>Standard Mat Sizes</b> 3' x 5', 4' x 6'</p> <p><b>Custom Sizes</b> 3' and 4' widths x custom lengths up to 60'</p>					
<b>Possible LEED Credits</b>					
MR Credit 5 (1-2 points)					


*miVantage™*  
Effectively traps moisture and will not stain floor



**Standard Edging**  
Heat embossed on all sides  
Custom Options Available



Gray




Brown

**3M**  
Authorized Master Distributor  
Entrance and Work Area Matting

# 3M™ Nomad™ Z-Web Extreme Traffic Scraper Matting 9100

Features	Zones	1	2	3	4
<p>Designed for EXTREME traffic conditions Up to and greater than 1,000,000 people/year</p> <p>Unbacked construction scrapes, traps and hides dirt and debris, minimizing re-tracking into the building</p> <p>Peaked edge design provides enhanced slip resistance</p> <p>Durable z-web construction provides excellent support for light wheeled traffic such as carts and wheelchairs</p>					
<b>Specifications</b>					
<p><b>Roll Sizes</b> 2' and 3' x 50'</p> <p>Longer rolls readily available</p> <p><b>Standard Mat Sizes</b> 2' x 20' (Gray only), 3' x 5', 3' x 20'</p> <p><b>Custom Sizes</b> 2' and 3' widths x custom lengths up to 50'</p> <p><b>Edging</b> Not Recommended</p>					
<b>Possible LEED Credits</b>					
MR Credit 5 (1-2 points)					


*miVantage™*  
Best 3M™ Nomad™ Scraper Matting for extreme traffic outdoors and in recessed well applications



Black



Gray



Brown

**3M**  
Authorized Master Distributor  
Entrance and Work Area Matting

# Modular Tiles

ZONES 1 2 3 4



# Trilogy Tile™

**Features**      **Zones**    1   2   3   4

Aggressive scraping cleans footwear to reduce the risk of slips and falls  
 Durable product ideal for commercial applications  
 High-end carpet-like appearance creates great first impression  
 Meets indoor air quality testing protocols  
 Class 1 fire rating  
 Common Uses—corporate, educational, retail, hospitality environments

*miVantage™  
 Superior  
 matting  
 tile with  
 contemporary  
 carpet design*

**Specifications** 

**Material**  
 Nylon fiber (6) textured tufted loop

**Backing**  
 100% post-consumer recycled PET primary backing and Bitumen secondary backing with 10% post-industrial recycled content

**Tile Size**  
 19-11/16" x 19-11/16"

**Case Pack**  
 20 tiles/case (53.8 sq ft)—full cases only

**Weight**  
 139 oz/sq yd

**Thickness**  
 9/32"

**Recommended Installation**  
 Brick, Monolithic, Quarter-Turn

**Adhesive**  
 Mats Inc. Release-Bond Adhesive



**Possible LEED v 2009 Credits**

- MR Credit 2 (1-2 points)
- MR Credit 4 (1-2 points)
- IEQ Credit 4.1 (1 point)
- IEQ Credit 4.3 (1 point)
- IEQ Credit 5 (1 point)



Oyster



Truffles



Portabello



# Journey Tile™

## Features

Bold regency stripe design for stylish interiors  
 Dual fiber construction scrapes off dirt and absorbs moisture  
 Class 1 fire rating  
 Endless installation pattern options  
 Developed for medium to heavy traffic commercial applications  
 Common Uses—corporate, educational, retail, hospitality environments

## Zones

1 2 3 4

*miVantage™  
 Superior  
 matting  
 tile with  
 contemporary  
 carpet design*

## Specifications

### Material

Nylon fiber (6) textured tufted loop

### Backing

Vinyl composite material reinforced with fiberglass

### Tile Size

24" x 24"

### Case Pack

18 tiles/case (72 sq ft)—full cases only

### Weight

157 oz/sq yd

### Thickness

5/16"

### Recommended Installation

Ashlar, Brick, Quarter-Turn, Ashlar Quarter-Turn

### Adhesive

Mats Inc. Release-Bond Adhesive

## Possible LEED v 2009 Credits

IEQ Credit 4.1 (1 point)


IEQ Credit 5 (1 point)

MR Credit 4 (1-2 points)


MR Credit 5 (1-2 points)




Acadia Blue



Denali Gray



Galapagos Green



Sahara Brown


## Installation Patterns



Quarter-Turn



Ashlar Quarter-Turn

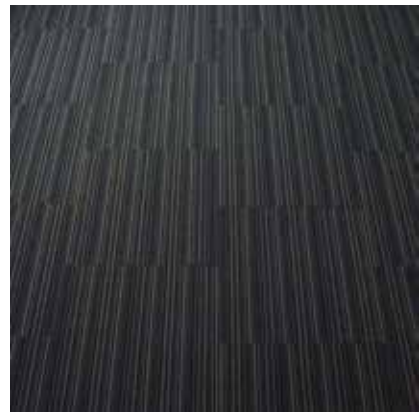

Brick

# Supreme Nop Tile

**Features**      **Zones**    1   2   3   4

Combines three unique fibers to create one of the most effective walk-off tiles in the industry  
 Blended fibers provide superior scraping action and durability  
 Dimensionally stable – won't shrink or curl  
 Common Uses—high traffic entrances, vestibules, lobbies, airports, retail

**Specifications** 

**Material**  
 100% solution-dyed UV stabilized polypropylene fibers with 53.89% post-consumer recycled content

**Backing**  
 Bitumen

**Tile Size**  
 19-11/16" x 19-11/16"

**Case Pack**  
 16 tiles/case (43.2 sq ft)—full cases only

**Weight**  
 132.4 oz/sq yd

**Thickness**  
 7/16"

**Recommended Installation**  
 Quarter-turn tiles (parquet pattern)

**Adhesive**  
 Mats Inc. Release-Bond Adhesive or Success Tape


**Custom**  
 Also available in roll goods, see page 26.



**Possible LEED v 2009 Credits**

- MR Credit 4 (1-2 points)
- IEQ Credit 4.1 (1 point)
- IEQ Credit 4.3 (1 point)
- IEQ Credit 5 (1 point)

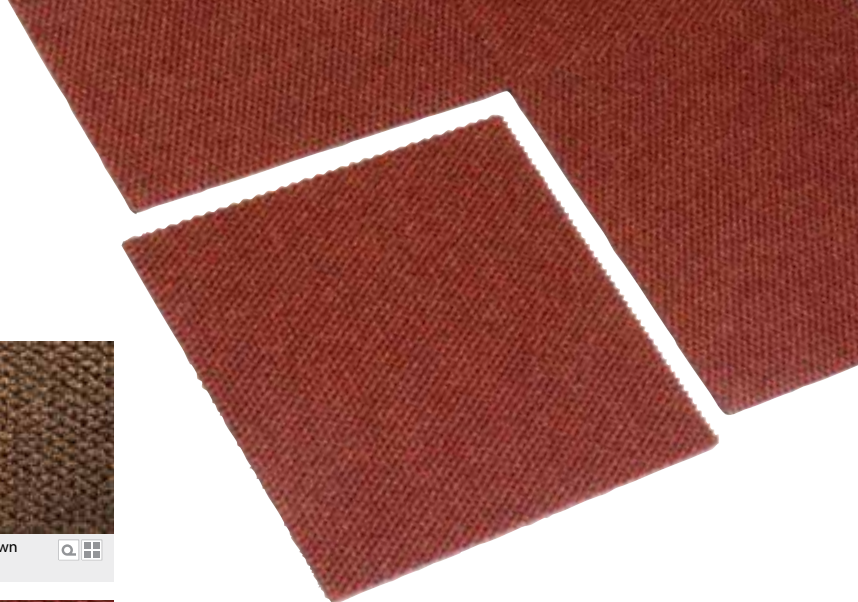

*miVantage™*  
 Most durable  
 and effective  
 matting tile in  
 the industry




 Tile     See Colors Also Available as Roll

			
Charcoal 	Black Walnut 	Sable Brown 	Tweed Brown 
			
Dark Gray 	Midnight Blue 	Spruce 	Autumn Red 




# Berber Tile


Features	Zones
<p>Outstanding walk-off performance for multi-directional traffic applications</p> <p>Easily maintained by vacuuming and periodic extraction</p> <p>Stain-resistant, color fast, and permanently anti-static</p> <p>Green Label Plus™ Certified</p> <p>Common Uses—entryways, vestibules</p>	<p>1 2 3 4</p>
<p><b>Specifications</b> </p>	
<p><b>Material</b> 100% solution-dyed UV stabilized polypropylene fibers with 56.93% post-consumer recycled content</p> <p><b>Backing</b> Bitumen</p> <p><b>Tile Sizes</b> 19-11/16" x 19-11/16"</p> <p><b>Case Pack</b> 20 tiles/case (54 sq ft)—full cases only</p> <p><b>Thickness</b> 3/8"</p> <p><b>Weight</b> 129.8 oz/sq yd</p> <p><b>Recommended Installation</b> Quarter-turn tiles (parquet pattern)</p> <p><b>Adhesive</b> Mats Inc. Release-Bond Adhesive or Success Tape</p> <p><b>Custom</b> Also available in roll goods, see page 27</p>	
<p><b>Possible LEED v 2009 Credits</b></p> <p>MR Credit 4 (1-2 points)</p> <p>IEQ Credit 4.1 (1 point)</p> <p>IEQ Credit 4.3 (1 point)</p> <p>IEQ Credit 5 (1 point)</p>	



 Tile  See Colors Also Available as Roll

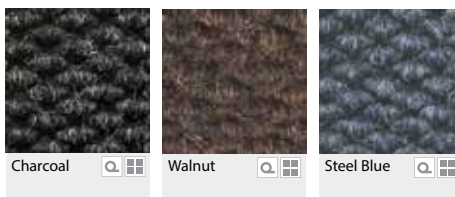


# Diagonal Tile


Features	Zones
<p>Diagonal rib design scrapes dirt and moisture from all types of footwear</p> <p>Dimensionally stable—won't shrink or curl</p> <p>Common Uses—high traffic entrances, vestibules, lobbies, retail stores, airports, fitness rooms, wall-to-wall applications</p>	<p>1 2 3 4</p>
<p><b>Specifications</b> </p>	
<p><b>Material</b> 100% solution-dyed UV stabilized polypropylene fibers with 52.05% post-consumer recycled content</p> <p><b>Backing</b> Bitumen</p> <p><b>Tile Size</b> 19-11/16" x 19-11/16"</p> <p><b>Case Pack</b> 20 tiles/case (54 sq ft)—full cases only</p> <p><b>Weight</b> 131 oz/sq yd</p> <p><b>Thickness</b> 3/8"</p> <p><b>Recommended Installation</b> Quarter-turn tiles (parquet pattern)</p> <p><b>Adhesive</b> Mats Inc. Release-Bond Adhesive or Success Tape</p> <p><b>Custom</b> Also available in roll goods, minimums may apply</p>	
<p><b>Possible LEED v 2009 Credits</b></p> <p>MR Credit 4 (1-2 points)</p> <p>IEQ Credit 4.1 (1 point)</p> <p>IEQ Credit 4.3 (1 point)</p> <p>IEQ Credit 5 (1 point)</p>	




*miVantage™*  
Aggressive  
scraping  
action with  
long life

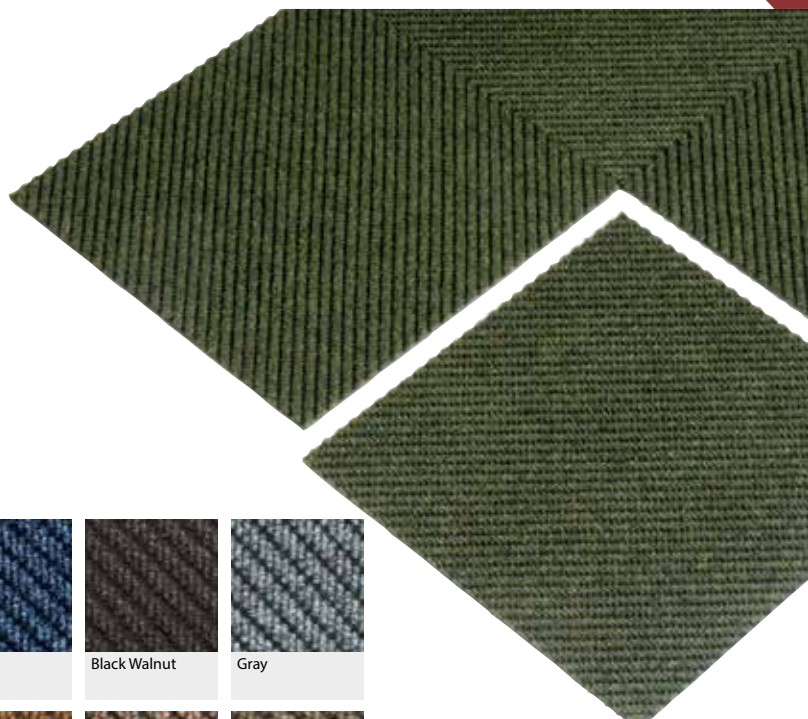

# Calypso Tile


Features	Zones
<p>Removes dirt and moisture in multi-directional traffic applications</p> <p>Dimensionally stable, won't shrink or curl</p> <p>Common Uses—high traffic entrances, vestibules, lobbies, retail stores, airports, wall-to-wall applications</p>	<p>1 2 3 4</p>
<p><b>Specifications</b> </p>	
<p><b>Material</b> 100% solution-dyed UV stabilized polypropylene fibers with 56.93% post-consumer recycled content</p> <p><b>Backing</b> Bitumen</p> <p><b>Tile Size</b> 19-11/16" x 19-11/16"</p> <p><b>Case Pack</b> 20 tiles/case (54 sq ft)—full cases only</p> <p><b>Weight</b> 129.8 oz/sq yd</p> <p><b>Thickness</b> 3/8"</p> <p><b>Recommended Installation</b> Quarter-turn tiles (parquet pattern)</p> <p><b>Adhesive</b> Mats Inc. Release-Bond Adhesive or Success Tape</p> <p><b>Custom</b> Also available in roll goods, minimums may apply</p>	
<p><b>Possible LEED v 2009 Credits</b></p> <p>MR Credit 4 (1-2 points)</p> <p>IEQ Credit 4.1 (1 point)</p> <p>IEQ Credit 4.3 (1 point)</p> <p>IEQ Credit 5 (1 point)</p>	

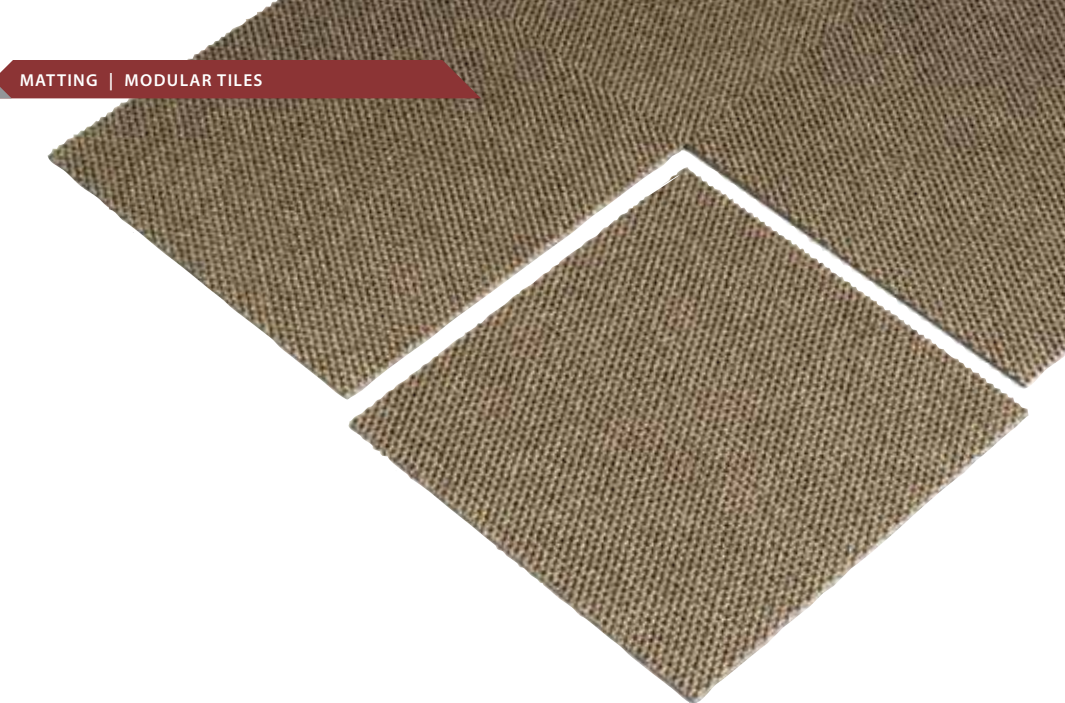

Anthracite




Lichen




Chestnut

# Slip Not 2000 Tile

Features	Zones
<p>Slip Not 2000 provides a durable solution for the most demanding entryways</p> <p>Unmatched walk-off performance</p> <p>Protects against hazardous slips and falls</p> <p>Common Uses—high traffic entrances, vestibules, lobbies, retail stores, airports, supermarkets</p>	<p>1 2 3 4</p>
<p><b>Specifications</b> </p>	
<p><b>Material</b> 100% solution-dyed UV stabilized polypropylene fibers with 52.07% post-consumer recycled content</p> <p><b>Backing</b> Bitumen</p> <p><b>Tile Size</b> 19-11/16" x 19-11/16"</p> <p><b>Case Pack</b> 12 tiles/case (32.4 sq ft)—full cases only</p> <p><b>Weight</b> 152.18 oz/sq yd</p> <p><b>Thickness</b> 1/2"</p> <p><b>Recommended Installation</b> Quarter-turn tiles (parquet pattern)</p> <p><b>Adhesive</b> Mats Inc. Release-Bond Adhesive or Success Tape</p>	
<p><b>Possible LEED v 2009 Credits</b></p> <p>MR Credit 4 (1-2 points)</p> <p>IEQ Credit 4.1 (1 point)</p> <p>IEQ Credit 4.3 (1 point)</p> <p>IEQ Credit 5 (1 point)</p>	

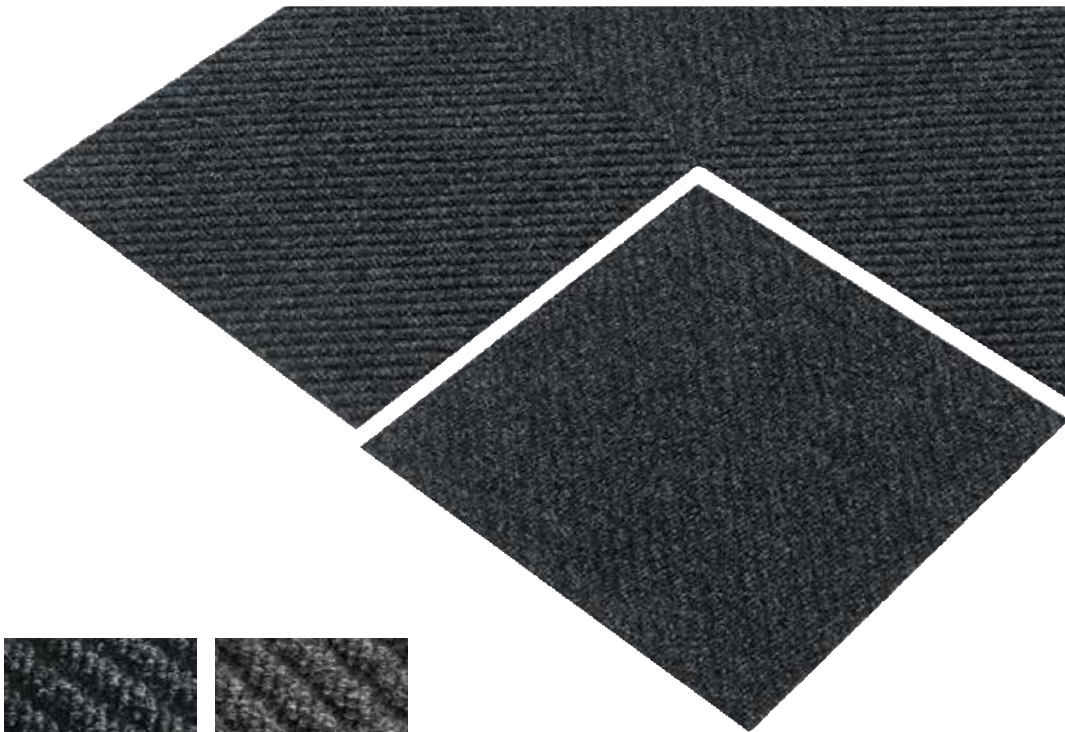

Charcoal



Dark Gray

# Enterprise Tile™

Features	Zones	1	2	3	4
----------	-------	---	---	---	---

Extremely durable, hard-wearing tile  
 Blended fibers provide superior scraping action  
 Ideal for wall-to-wall applications as well as entrances  
 Common Uses—high traffic entrances, vestibules, lobbies, retail stores

### Specifications

**Material**  
 100% polypropylene with 15% pre-consumer and 15% post-consumer recycled content

**Backing**

Bitumen

**Tile Size**

19-11/16" x 19-11/16"

**Case Pack**

16 tiles/case (43.20 sq ft)—full cases only

**Weight**

160 oz/sq yd

**Thickness**

3/8"

**Adhesive**

Mats Inc. Release-Bond Adhesive



### Possible LEED v 2009 Credits

MR Credit 4 (1-2 points)  
 IEQ Credit 4.1 (1 point)  
 IEQ Credit 5 (1 point)



Anthracite

# Tire Tile

Features	Zones	1	2	3	4
----------	-------	---	---	---	---

Environmentally-friendly, made from recycled tires  
 Wheeled traffic moves efficiently across the surface  
 Traps dirt, absorbs moisture and protects floors  
 Low maintenance  
 Common Uses—high traffic entrances, vestibules, lobbies, retail stores, supermarkets

### Specifications

**Material**  
 Recycled Rubber Tire Strips with 80% post-consumer recycled content

**Backing**

Non-flammable solid adhesive base

**Style**

Buffed, chenille-like fluff cord

**Tile Size**

12" x 12"

**Case Pack**

25 tiles/case (25 sq ft)—full cases only

**Weight**

2 lbs/sq ft

**Thickness**

3/8"

**Recommended Installation**

Quarter-turn tiles (parquet pattern)

**Adhesive**

Urethane Bond Rubber Flooring Adhesive

### Possible LEED v 2009 Credits

MR Credit 4 (1-2 points)  
 MR Credit 5 (1-2 points)  
 IEQ Credit 4.1 (1 point)  
 IEQ Credit 5 (1 point)



Earth Tone



# Geo Tile

Features	Zones
<p>Geometric pattern offers outstanding cleaning performance by containing dirt and moisture</p> <p>Rubber-reinforced pattern prevents pile from crushing, extending product life</p> <p>Ideal for surface mount or recessed installations</p> <p>Damaged or worn tiles may be replaced easily</p> <p>Common Uses—high traffic entrances, vestibules, lobbies, retail stores, supermarkets</p>	<p>1 2 3 4</p>
Specifications	
<p><b>Material</b> 100% solution-dyed low static polypropylene (molded and reinforced)</p> <p><b>Backing</b> Molded rubber</p> <p><b>Tile Size</b> 18" x 18"</p> <p><b>Thickness</b> 1/4" or 7/16"</p> <p><b>Case Pack</b> 1/4" = 12 tiles/case (27 sq ft)—full cases only 7/16" = 10 tiles/case (22.5 sq ft)—full cases only</p> <p><b>Weight</b> 1/4" = 0.56 lb/sq ft 7/16" = 0.98 lb/sq ft</p> <p><b>Adhesive</b> Mats Inc. Perma-Bond Adhesive</p>	
Possible LEED v 2009 Credits	
<p>MR Credit 5 (1-2 points) IEQ Credit 4.1 (1 point) IEQ Credit 5 (1 point)</p>	



# Aqua Block Tile

Features	Zones
<p>Unique rigid construction effectively removes and traps dirt and moisture</p> <p>Rubber-reinforced pattern prevents pile from crushing, extending product life</p> <p>Anti-slip surface, even when wet</p> <p>Common Uses—high traffic entrances, vestibules, lobbies, retail stores, supermarkets</p>	<p>1 2 3 4</p>
Specifications	
<p><b>Material</b> 100% solution-dyed low static polypropylene (molded and reinforced)</p> <p><b>Backing</b> Molded rubber</p> <p><b>Tile Size</b> 18" x 18"</p> <p><b>Thickness</b> 1/4" or 7/16"</p> <p><b>Case Pack</b> 1/4" = 12 tiles/case (27 sq ft)—full cases only 7/16" = 10 tiles/case (22.5 sq ft)—full cases only</p> <p><b>Weight</b> 1/4" = 0.85 lb/sq ft 7/16" = 1.49 lbs/sq ft</p> <p><b>Adhesive</b> Mats Inc. Perma-Bond Adhesive</p>	
Possible LEED v 2009 Credits	
<p>MR Credit 5 (1-2 points) IEQ Credit 4.1 (1 point) IEQ Credit 5 (1 point)</p>	

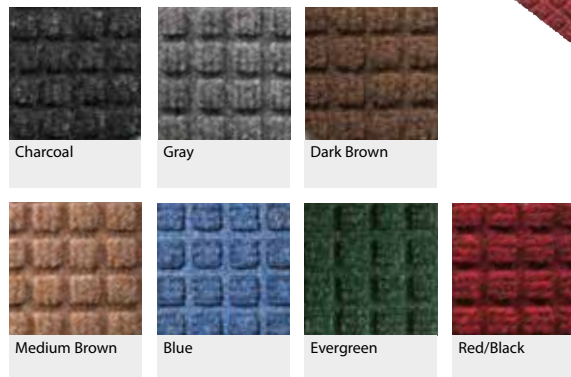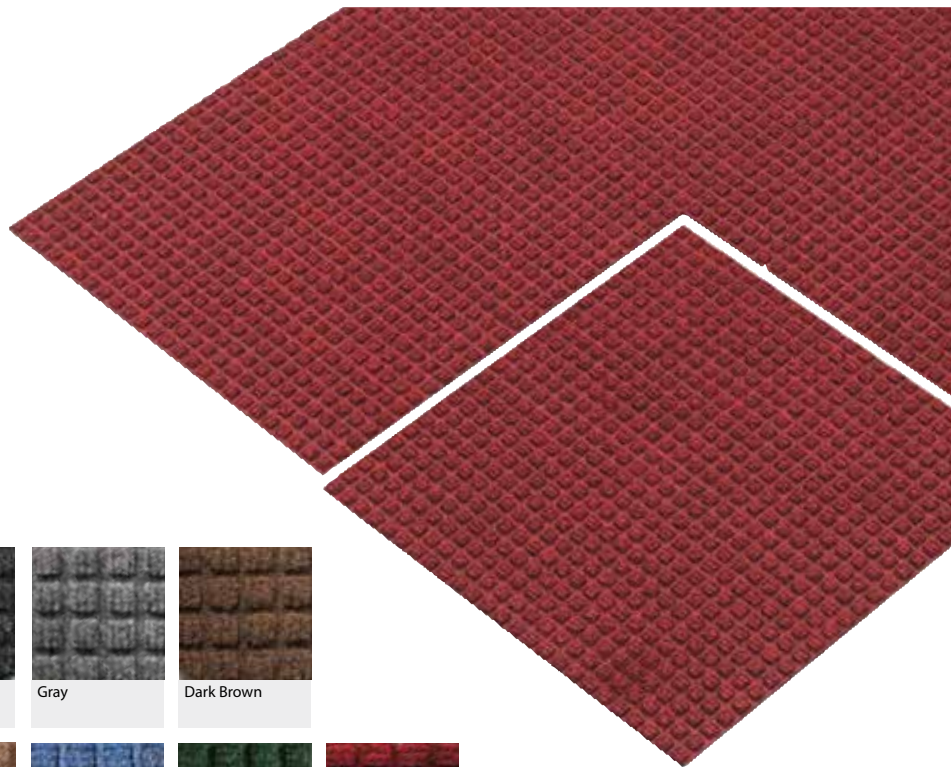


# Matting: Roll Goods & Mats

ZONES 1 2 3 4



*Supreme Nop*

# New York Collection

Features	Zones	1	2	3	4
<p>Coarse, bristle-like fibers effectively brush shoes clean and capture dirt in the mat</p> <p>SureTac™ vinyl backing will not crack</p> <p>Rich, vibrant color selection</p> <p>Common Uses—indoor settings, entrances, foyers, vestibules, lobbies</p>					
<p><b>Specifications</b> </p> <p><b>Material</b> 100% premium polyamide nylon fibers (6.6) with 10% post-consumer recycled content</p> <p><b>Backing</b> Premium SureTac™ Vinyl</p> <p><b>Roll Size</b> 6' 7" x 82'</p> <p><b>Custom Sizes</b> 6' 7" width x lengths to 82'</p> <p>Roll width includes 1" vinyl edge on each roll side May be trimmed off for glue down applications Specify if nosing is required on ends</p> <p><b>Weight</b> 99 oz/sq yd</p> <p><b>Thickness</b> 3/8"</p> <p><b>Recommended Installation</b> Loose lay—Standard Nosing (Glue-On) Glue down—Mats Inc. Ultrabond G21 Adhesive</p>					
<p><b>Possible LEED v 2009 Credits</b></p> <p>MR Credit 4 (1-2 points) IEQ Credit 4.1 (1 point) IEQ Credit 5 (1 point)</p>					


*miVantage™  
Most aggressive matting with lavish carpet-like appearance*



*Invisible scraping fibers*



# Seattle Collection™

Features	Zones	1	2	3	4
<p>Nylon fibers remove debris and moisture from footwear</p> <p>SureTac™ vinyl backing will not crack</p> <p>Common Uses—indoor settings, entrances, foyers, vestibules, lobbies</p>					
<p><b>Specifications</b> </p> <p><b>Material</b> 100% premium polyamide nylon fibers (6.6) with 10% post-consumer recycled content</p> <p><b>Backing</b> Premium SureTac™ Vinyl</p> <p><b>Roll Size</b> 4' 2" x 82'</p> <p><b>Custom Sizes</b> 6' 7" width x lengths to 82'</p> <p>Roll width includes 1" vinyl edge on each roll side. May be trimmed off for glue down applications. Specify if nosing is required on ends.</p> <p><b>Weight</b> 105 oz/sq yd</p> <p><b>Thickness</b> 5/16"</p> <p><b>Recommended Installation</b> Loose lay—Standard Nosing (Glue-On) Glue down—Mats Inc. Ultrabond G21 Adhesive</p>					
<p><b>Possible LEED v 2009 Credits</b></p> <p>MR Credit 4 (1-2 points) IEQ Credit 4.1 (1 point) IEQ Credit 5 (1 point)</p>					

*miVantage™  
Deeply saturated colors and the luxurious appearance of carpet*



# Chicago Collection™

Features	Zones	1	2	3	4
<p>Tufted nylon fibers remove debris and moisture from footwear</p> <p>Rich colors with subtle wave design</p> <p>Common Uses—indoor settings, entrances, foyers, vestibules, lobbies</p>					
<b>Specifications</b> 					
<p><b>Material</b> 100% premium polyamide nylon fibers with 10% post-consumer recycled content</p> <p><b>Backing</b> Anchor™ rubber backing</p> <p><b>Roll Size</b> 6' 7" x 68' 13' 2" x 68'</p> <p><b>Custom Sizes</b> 6' 7" width x lengths to 68' 13' 2" width x custom lengths up to 68'</p> <p><b>Weight</b> 76.09 oz/sq yd</p> <p><b>Thickness</b> 5/16"</p> <p><b>Recommended Installation</b> Loose lay—Standard Nosing (Glue-On) Glue down—Visit matsinc.com for instructions</p>					
<b>Possible LEED v 2009 Credits</b>					
<p>MR Credit 4 (1-2 points)</p> <p>IEQ Credit 4.1 (1 point)</p> <p>IEQ Credit 5 (1 point)</p>					

*miVantage™*  
*Wide format*  
*nylon matting*  
*for larger*  
*entrances*



Blue



Charcoal



Dark Gray



Mocha




Brown

# 3M™ Nomad™ Extreme Traffic Wall-to-Wall Carpet Matting 9800

Features	Zones	1	2	3	4
<p>Designed for EXTREME traffic conditions Up to and greater than 1,000,000 people/year</p> <p>Dual-fiber, random pattern provides exceptional dirt and water removal and allows sand, salt and dirt to blend in until it can be removed</p> <p>Solution-dyed fibers resist fading and staining</p> <p>Multicoated, fiberglass-reinforced vinyl backing provides a water barrier for the floor, helping to prevent mold, mildew, fungus and water damage</p> <p>Low profile allows foot, cart and wheelchair traffic to move easily over the mat</p>					
<b>Specifications</b>					
<p><b>Roll Sizes</b> 6' x 50'</p> <p><b>Edging</b> Not recommended</p>					
<b>Possible LEED v 2009 Credits</b>					
MR Credit 5 (1-2 points)					

*miVantage™*  
*Exceptional*  
*dirt and water*  
*removal for*  
*large indoor*  
*entrances and*  
*wall-to-wall*  
*applications*



Black



**3M**  
Authorized Master Distributor  
Entrance and Work Area Matting

# Supreme Nop

**Features**

**Zones**

- 1
- 2
- 3
- 4

Combines three unique fibers to create one of the most effective walk-off mats in the industry  
 Large nop design provides outstanding scrubbing action  
 Green Label Plus™ Certified  
 Common Uses—high traffic entrances, vestibules, lobbies, sports facilities

**Specifications**

**Material**  
 100% solution-dyed UV stabilized polypropylene fibers with 15% post-consumer recycled content

**Backing**  
 OxForce™ high density rubber

**Roll Sizes**  
 6' 7" x 82'  
 13' 2" x 68' 8"

**Custom Sizes**  
 6' 7" x custom lengths up to 82'  
 13' 2" x custom lengths up to 68' 8"  
 Also available as modular tile, see page 18


**Weight**  
 73 oz/sq yd

**Thickness**  
 7/16"

**Recommended Installation**  
 Loose lay—Ultra Flex Sew-On Nosing  
 Glue down—Mats Inc. Multi-Bond Adhesive




*miVantage™  
 Most durable  
 and effective  
 matting in the  
 industry*

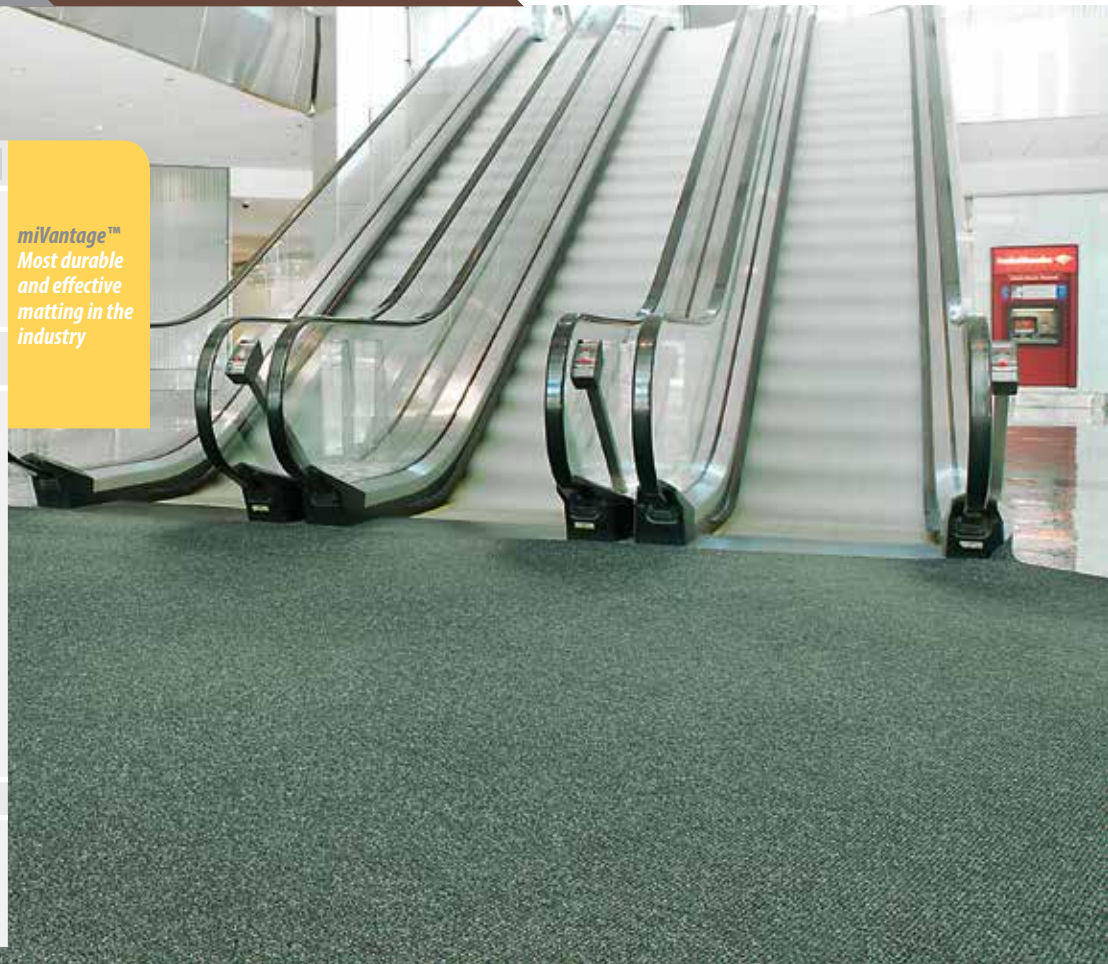

**Possible LEED v 2009 Credits**

- MR Credit 4 (1-2 points)
- IEQ Credit 4.1 (1 point)
- IEQ Credit 4.3 (1 point)
- IEQ Credit 5 (1 point)

Roll See Colors Also Available as Tile



OxForce™ high density rubber backing is long lasting and holds mats securely in place.



Shown with Ultra-Flex Nosing for loose lay mats

Charcoal	Dark Gray	Black Walnut	Tweed Brown
Sable Brown	Natural	Spruce	Midnight Blue
Sapphire	Autumn Red		





# Berber

Features	Zones
	1 2 3 4

Outstanding walk-off performance for multi-directional traffic applications  
 Easily maintained by vacuuming and periodic extraction  
 Stain-resistant, color fast, and permanently anti-static  
 Green Label Plus™ Certified  
 Common Uses—entryways, vestibules

### Specifications

**Material**  
 100% solution-dyed UV stabilized polypropylene fibers with 15% post-consumer recycled content

**Backing**  
 OxForce™ high density rubber

**Roll Sizes**  
 6' 7" x 82'  
 13' 2" x 68' 8"  
 Charcoal, Walnut and Steel Blue also available in tiles

**Custom Sizes**  
 6' 7" x custom lengths up to 82'  
 13' 2" x custom lengths up to 68' 8"  
 Also available as tiles, see page 19

**Thickness**  
 3/8"

**Weight**  
 64 oz/sq yd

**Recommended Installation**  
 Loose lay—Standard Nosing (Sew-On)  
 Glue down—Mats Inc. Multi-Bond Adhesive




### Possible LEED v 2009 Credits


MR Credit 4 (1-2 points)  
 IEQ Credit 4.1 (1 point)  
 IEQ Credit 4.3 (1 point)  
 IEQ Credit 5 (1 point)



OxForce™ high density rubber backing is long lasting and holds mats securely in place.



 Roll  See Colors Also Available as Tile

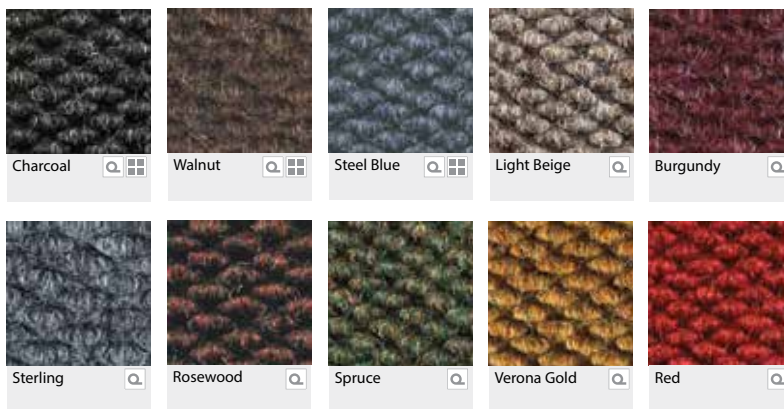

Ask us about Logo Mats

# Berkshire

Features	Zones
	1 2 3 4

A synthetic alternative to Cocoa Mat, without the shedding  
 Plush texture is comfortable under foot  
 Highly effective at scraping dirt and removing moisture  
 Green Label Plus™ Certified  
 Common Uses—high traffic entrances, vestibules, lobbies, retail stores, supermarkets, locker rooms, pools, golf courses, sports facilities

### Specifications

**Material**  
 100% solution-dyed UV stabilized polypropylene fibers with 10% post-consumer recycled content in natural and 5% post-consumer in all other colors

**Backing**  
 OxForce™ high density rubber

**Roll Sizes**  
 6' 7" x 82'  
 13' 2" x 68' 8"

**Custom Sizes**  
 6' 7" x custom lengths up to 82'  
 13' 2" x custom lengths up to 68' 8"

**Thickness**  
 1/2"



**Weight**  
 81.4 oz/sq yd

**Pattern**  
 Ribs run length of the roll

**Recommended Installation**  
 Loose lay—Ultra Flex Sew-On Nosing or shaved beveled edges with rounded corners  
 Glue down—Mats Inc. Multi-Bond Adhesive



OxForce™ high density rubber backing is long lasting and holds mats securely in place.

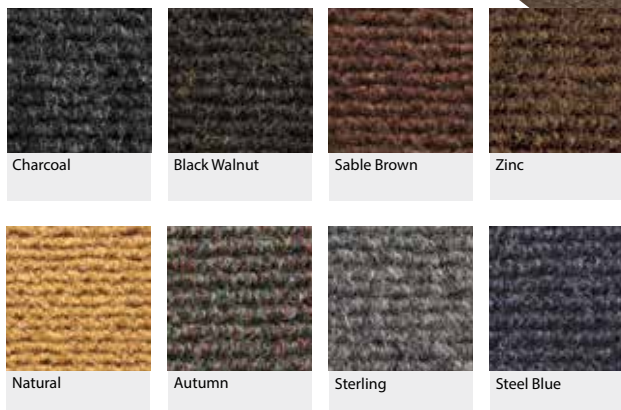

# Decorib

Features	Zones	1	2	3	4
----------	-------	---	---	---	---

Deep rib design scrapes soil from all types of footwear  
 Needle punch construction resists crushing  
 Outstanding performance and value  
 Green Label Plus™ Certified  
 Charcoal also available in tiles  
 Common Uses—entryways and vestibules

### Specifications

**Material**  
 100% solution-dyed UV stabilized polypropylene fibers with 15% post-consumer recycled content

**Backing**  
 High density rubber

**Roll Sizes**  
 6' 7" x 82'  
 13' 2" x 68' 8"

**Custom Sizes**  
 6' 7" x custom lengths up to 82'  
 13' 2" x custom lengths up to 68' 8"

**Thickness**  
 3/8"

**Weight**  
 64 oz/sq yd

**Pattern**  
 Ribs run length of the roll



**Recommended Installation**  
 Loose lay—Standard Nosing (Sew-On)  
 Glue down—Mats Inc. Multi-Bond Adhesive



### Possible LEED v 2009 Credits

MR Credit 4 (1-2 points)  
 IEQ Credit 4.1 (1 point)  
 IEQ Credit 4.3 (1 point)  
 IEQ Credit 5 (1 point)

Roll See Color Also Available as Tile

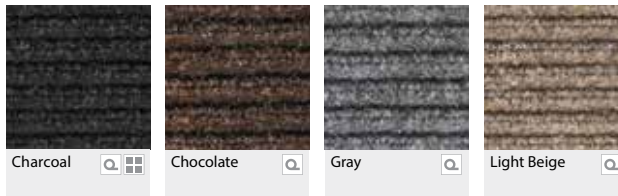

# Cocoa Mat

Features	Zones	1	2	3	4
----------	-------	---	---	---	---

Authentic, natural and rapidly renewable coco fibers provide a classic look in any entryway  
 Coarse coco fibers brush away dirt and moisture  
 Heavy weight Coco material with more compact fibers reduces shedding and crushing  
 Common Uses—entryways, vestibules, foyers with multi-directional traffic flow

### Specifications

**Material**  
 Natural coco fibers—50% of Cocoa Mat is made from natural material

**Style**  
 Cut Pile

**Backing**  
 Vinyl

**Roll Size**  
 6' 7" x 39' 4"

**Custom Sizes**  
 6' 7" width x lengths to 39' 4"

**Thickness**  
 All Colors = 17 mm (5/8")  
 Natural also available in 20 mm (3/4") and 23 mm (1")

**Weight**  
 17 mm (5/8") = 1.36 lbs/sq ft  
 20 mm (3/4") = 1.43 lbs/sq ft  
 23 mm (1") = 1.52 lbs/sq ft

### Possible LEED v 2009 Credits

MR Credit 6 (1 point)  
 IEQ Credit 5 (1 point)



# Logo Mats

ZONES 1 2 3 4



*Precision Inlay™ Logo*

# Precision Inlay Plush™

**Features**

**Zones**

- 1
- 2
- 3
- 4

Precise reproduction of a logo or image in a superior quality plush mat  
 Create with any image, shape or size  
 Choose from a large selection of standard colors (For additional color options, contact our Design Department)  
 Luxurious walk-off mat absorbs moisture and removes dirt  
 Non-skid backing keeps mat in place  
 Common Uses—retail stores, malls, commercial settings, lobbies, reception areas, service counters

*miVantage™  
 Luxurious  
 matting ideal  
 for oversized  
 logo mats or  
 wall-to-wall  
 designs*

**Specifications**

**Material**  
 100% solution-dyed premium polyamide nylon fibers (6.6) with 34.6% pre-consumer recycled content for Multi colors

**Style**  
 Graphic Inlay

**Backing**  
 Non-skid rubber

**Thickness**  
 3/8"

**Weight**  
 Solids = 42 oz/sq yd  
 Multi = 48 oz/sq yd



**Possible LEED v 2009 Credits**

**Solids**  
 MR Credit 5 (1-2 points)  
 IEQ Credit 4.3 (1 point)

**Multi**  
 MR Credit 4 (1-2 points)  
 MR Credit 5 (1-2 points)



**Solid**

Cranberry 860	Red 861	Orange 601	Yellow 201	Gold 235	Green 399	Navy 485	Periwinkle Blue 920
Purple 903	Grape 979	Dark Brown 711	Medium Brown 713	Black 505	Dark Gray 585	Medium Gray 606	Light Gray 501
Dark Green 321	Olive 309	Beige 135	Cream 101				

**Multi**

Pepper Brown 1001	Pepper Gray 2001

# Precision Inlay™ Logo

**Features**      **Zones**    1   2   3   4

Computer technology scans your logo or image, then cuts exact inlays to reproduce crisp, bold and colorful designs  
 Withstands high foot traffic  
 Inlay process accurately reproduces fonts and images  
 Common Uses—retail stores, malls, commercial settings, hotels, hospitals

**Specifications**

**Material**  
 100% solution-dyed UV stabilized polypropylene fibers with 15% post-consumer content

**Thickness**  
 7/16"

**Weight**  
 73 oz/sq yd



*miVantage™ High performance matting from small logo mats to wall-to-wall applications*

**Possible LEED v 2009 Credits**


- IEQ Credit 4.1 (1 point)
- IEQ Credit 4.3 (1 point)
- IEQ Credit 5 (1 point)
- MR Credit 4 (1-2 points)




**Supreme Nop**



**Bright Colors**

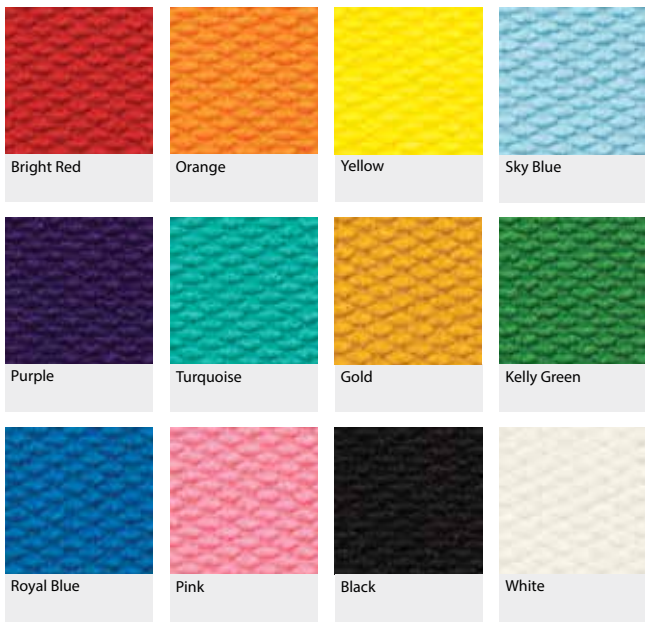

See Other Precision Inlay™ Logo Products

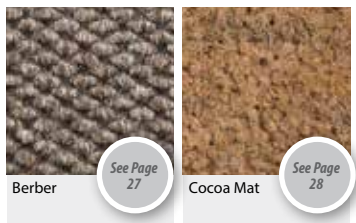

**miDesign Studio**  
 Custom Floor Mat Design in 3 Easy Steps  
 Visit matsinc.com

# Design Print™

Features	Zones	1	2	3	4
Jet Print technology injects dyes deeply and permanently into the pile to produce colorful logos Virtually unlimited color combinations Jet Print process promotes a high level of detail Common Uses—high traffic entrances, retail areas, lobbies, reception areas, service counters					
<b>Specifications</b>					
<b>Material</b> 100% heat set nylon					
<b>Style</b> Jet Print					
<b>Backing</b> Slip-resistant nitrile rubber					
<b>Standard Sizes</b> 2' x 3', 3' x 4', 3' x 5', 3' x 10', 4' x 6', 4' x 8', 5' x 6', 5' x 8'					
<b>Thickness</b> 3/8"					
<b>Custom Sizes/Artwork Requirements</b> Contact our Logo Matting Department at 1-800-628-7462					

*miVantage™  
Economical  
mat ideal  
for large  
quantities*



Heat Set Nylon

# 3M™ Nomad™ Printed Carpet Matting 6600


Features	Zones	1	2	3	4
Designed for MEDIUM traffic conditions Allows you to print your custom logo, message, product photo or virtually any custom graphic on a high-performance carpet mat Dual nylon fibers provide exceptional dirt and water removal Flexion vinyl backing will not stain floor and prevents dirt and moisture from falling through the mat onto the floor					
<b>Specifications</b>					
<b>Material</b> Dual nylon fibers					
<b>Backing</b> Vinyl					
<b>Standard Sizes</b> 3', 4' and 6' widths up to 60'					
<b>Custom Sizes/Artwork Requirements</b> Contact our Logo Matting Department at 1-800-628-7462					
<b>Possible LEED v 2009 Credits</b>					
MR Credit 5 (1-2 points)					

*miVantage™  
Dual-fiber  
carpet mat  
for indoor  
applications*



Dual Fiber Nylon

**3M**  
Authorized Master Distributor  
Entrance and Work Area Matting

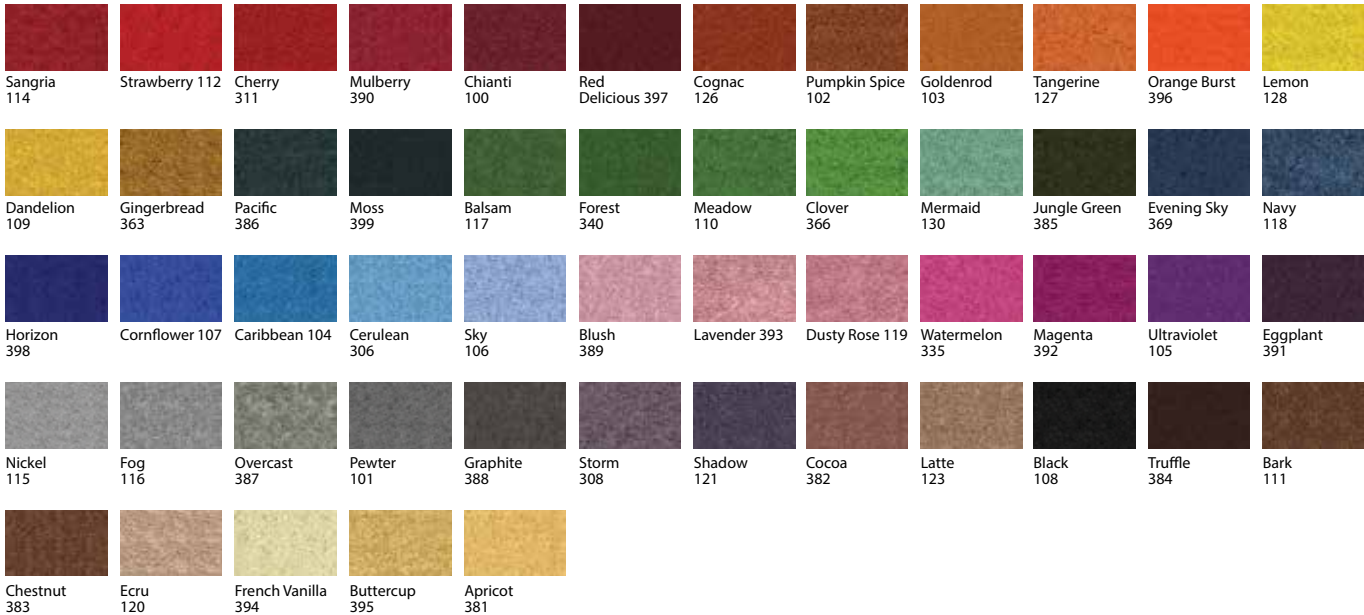

# 3M™ Nomad™ Embossed Scraper Matting

## Features

Zones 1 2 3 4

Designed for MEDIUM traffic conditions  
 Up to 400,000 people per year  
 An economical personalization method to get your name, logo or message in front of customers  
 Desired image is produced by melting the matting surface under heat and pressure—the resulting image is the same color as the mat  
 Available in vinyl loop and z-web scraper mats, backed and unbacked  
 Solid vinyl backing helps protect floors from removed soil and will not stain flooring

*miVantage™  
 Economical  
 personalized  
 matting for  
 medium  
 traffic areas*



## Specifications

**Embossing Graphics Colors**  
 Image is same color as mat

**Embossing Graphics Area**  
 Maximum overall impressions size is 22" x 27"; maximum impression area (not overall dimension) is 120 square inches

**Embossing Logo Positions**  
 Portrait or landscape positions are standard. Custom positions and designs are available if detailed artwork is provided.

**Standard Edging**  
 Heat embossed on all sides

**Roll Sizes**  
 3' and 4' x 60' (Longer rolls readily available)  
 † Logo colors 4' x 60'

**Standard Mat Sizes**  
 3' x 5', 4' x 6', 3' x 20', 4' x 20'

**Custom Sizes**  
 3' and 4' widths x custom lengths up to 60'  
 † Logo colors 4' width x custom lengths up to 20'  
 \* Red, Blue and Green 3' width x custom lengths up to 20'  
 Seaming is also available

## Possible LEED v 2009 Credits

MR Credit 5 (1-2 points)

**3M**  
 Authorized Master Distributor  
 Entrance and Work Area Matting



6050 and 8150 also available with logo inlay. Contact our Logo Matting Department for details.

### 3M™ Nomad™ Medium Traffic Scraper Matting 6050



### 3M™ Nomad™ Z-Web Medium Traffic Scraper Matting 6250



# Matting: Walk-Off Mats & Runners

ZONES 1 2 3 4



*3M™ Nomad™ Carpet Matting 8850*



# 3M™ Nomad™ Carpet Matting Journey 7000™

## Features

Dual-fiber construction scrapes off dirt and absorbs moisture  
 Class 1 fire rating  
 Developed for medium to heavy traffic commercial applications  
 Common Uses—indoor settings, entrances, foyers, vestibules, lobbies

## Specifications

### Material

Nylon 6 textured tufted loop with 14% pre-consumer and 5% post-consumer recycled content

### Backing

Flexion Vinyl

### Standard Mat Sizes

3' x 5', 3' x 10', 4' x 6', 4' x 10', 4' x 20', 6' x 6', 6' x 10'

### Roll Size

3" x 60', 4" x 60', 6" x 60'

### Semi-Custom Sizes

3', 4' and 6' widths by custom lengths up to 60'

### Custom Sizes

Any width x any length

### Weight

88 oz/sq yd

### Thickness

1/4"

## Possible LEED v 2009 Credits

IEQ Credit 5 (1 point)


MR Credit 4 (1-2 points)

MR Credit 5 (1-2 points)


## Zones

1 2 3 4

*miVantage™*  
 Bold regency  
 stripe design  
 for stylish  
 interiors



**Standard Edging**  
 4-sided factory  
 edge on all  
 standard sizes



**Custom Edging**  
 4-sided premium  
 high-traffic wide  
 cove nosing



Acadia Blue



Denali Gray



Galapagos Green



Sahara Brown

**3M**  
 Authorized Master Distributor  
 Entrance and Work Area Matting



# 3M™ Nomad™ Heavy Traffic Carpet Matting 8850

Features	Zones
<p>Designed for HEAVY traffic conditions Up to 1,000,000 people/year</p> <p>Dual-fiber and random pattern hide salt, dirt and debris until it can be removed</p> <p>Solution-dyed fibers resist fading and staining and keep the mat looking good longer</p> <p>Flexion vinyl backing will not stain floor and prevents dirt and moisture from reaching the floor</p> <p>Low profile allows foot, cart and wheelchair traffic to move easily over the mat</p>	<p>1 2 3 4</p>
Specifications	
<p><b>Standard Mat Sizes</b> 3' x 5', 3' x 10', 4' x 6', 4' x 10', 6' x 10'</p> <p><b>Roll Sizes</b> 3', 4', 6' x 60'</p> <p><b>Semi-Custom Sizes</b> 3', 4' and 6' widths x custom lengths up to 60'</p> <p><b>Custom Sizes</b> Any width x any length</p>	
Possible LEED v 2009 Credits	
<p>MR Credit 5 (1-2 points)</p> <p>IEQ Credit 5 (1 point)</p>	

*miVantage™ Polypropylene and nylon fibers combine to provide superior scraping and drying in heavy traffic applications*



**Standard Edging**  
4-sided factory edge on all standard sizes

**Custom Edging**  
4-sided premium high-traffic wide cove nosing



Standard Edging


Wide Cove

**3M**  
Authorized Master Distributor  
Entrance and Work Area Matting

# 3M™ Nomad™ Carpet Matting 6500

Features	Zones
<p>Designed for MEDIUM traffic conditions Up to 400,000 people/year</p> <p>Dual-fiber, checkerboard pattern scrapes off dirt and removes water</p> <p>Flexion vinyl backing won't stain the floor and helps prevent dirt and moisture from penetrating through the mat to the floor</p>	<p>1 2 3 4</p>
Specifications	
<p><b>Standard Mat Sizes</b> 3' x 5', 4' x 6'</p> <p><b>Roll Sizes</b> 3', 4', 6' x 60'</p> <p><b>Semi-Custom Sizes</b> 3', 4' and 6' widths x custom lengths up to 60'</p> <p><b>Custom Sizes</b> Any width x any length</p>	
Possible LEED v 2009 Credits	
<p>MR Credit 5 (1-2 points)</p> <p>IEQ Credit 5 (1 point)</p>	

*miVantage™ Dual-fiber matting with Flexion backing prevents dirt and moisture from reaching the floor underneath*

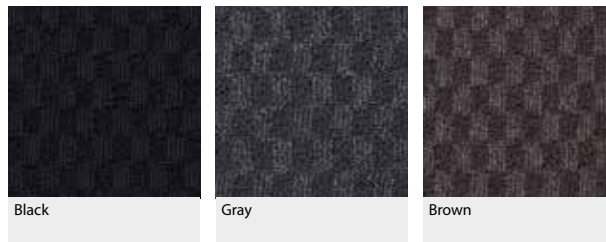

**3M**  
Authorized Master Distributor  
Entrance and Work Area Matting

**Standard Edging**  
4-sided factory edge on all standard sizes

**Custom Edging**  
4-sided narrow cove nosing or premium high-traffic wide cove nosing



Standard Edging

Narrow Cove

Wide Cove



# 3M™ Nomad™ Carpet Matting 5000

Features	Zones	1	2	3	4
<p>Designed for LIGHT traffic conditions Up to 50,000 people/year Cross-rib, dual-fiber design scrapes off dirt and removes water Flexion vinyl backing won't stain the floor and helps prevent dirt and moisture from reaching the floor underneath Heather weave blended designer colors complement almost any décor</p>					
<p><b>Specifications</b></p> <p><b>Standard Mat Sizes</b> 3' x 5', 3' x 10', 4' x 6', 4' x 10', 6' x 10'</p> <p><b>Roll Sizes</b> 3', 4', 6' x 60'</p> <p><b>Semi-Custom Sizes</b> 3', 4' and 6' widths x custom lengths up to 60'</p> <p><b>Custom Sizes</b> Any width x any length</p>					
<p><b>Possible LEED v 2009 Credits</b></p> <p>MR Credit 5 (1-2 points) IEQ Credit 5 (1 point)</p>					


*miVantage™  
Dual-fiber  
matting  
with Flexion  
backing  
prevents dirt  
and moisture  
from reaching  
the floor  
underneath*



**3M**  
Authorized Master Distributor  
Entrance and Work Area Matting

**Standard Edging**  
4-sided factory edge on all standard sizes

**Custom Edging**  
4-sided narrow cove nosing or premium high-traffic wide cove nosing

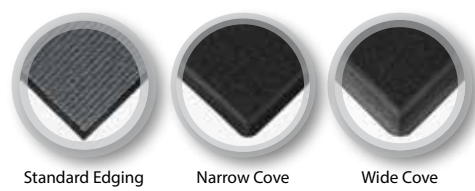

# 3M™ Nomad™ Carpet Matting 4000

Features	Zones	1	2	3	4
<p>Designed for LIGHT traffic conditions Up to 50,000 people/year The dual-fiber construction eliminates and hides dirt and moisture Flexion vinyl backing won't stain the floor and helps prevent dirt and moisture from reaching the floor underneath</p>					
<p><b>Specifications</b></p> <p><b>Standard Mat Sizes</b> 3' x 5', 3' x 10', 4' x 6', 4' x 10', 6' x 10'</p> <p><b>Roll Sizes</b> 3', 4', 6' x 60'</p> <p><b>Semi-Custom Sizes</b> 3', 4' and 6' widths x custom lengths up to 60'</p> <p><b>Custom Sizes</b> Any width x any length</p>					
<p><b>Possible LEED v 2009 Credits</b></p> <p>MR Credit 5 (1-2 points) IEQ Credit 5 (1 point)</p>					

*miVantage™  
Dual-fiber  
matting  
with Flexion  
backing  
prevents dirt  
and moisture  
from reaching  
the floor  
underneath*




**Standard Edging**  
4-sided factory edge on all standard sizes

**Custom Edging**  
4-sided narrow cove nosing or premium high-traffic wide cove nosing





**3M**  
Authorized Master Distributor  
Entrance and Work Area Matting

# Berber Vinylback

Features	Zones	1	2	3	4
<p>Super-durable fibers provide outstanding walk-off performance</p> <p>Hobnail design provides aggressive soil removal</p> <p>Heavy-duty SureTac™ vinyl back won't crack and ensures flat, durable edges</p> <p>Not recommended on ceramic</p> <p>Common Uses—loose lay in high, multi-directional traffic entrances, vestibules, lobbies, hallways, elevators</p>					
<p><b>Specifications</b> </p> <p><b>Material</b> 100% solution-dyed UV stabilized polypropylene fibers with 15% post-consumer recycled content</p> <p><b>Backing</b> Premium SureTac™ Vinyl</p> <p><b>Mat Sizes</b> 3' x 5', 4' x 6'</p> <p><b>Roll Sizes</b> 3' x 60' (Charcoal and Walnut) 4' x 60', 6' x 60'</p> <p><b>Custom Sizes</b> 3', 4' and 6' widths x lengths to 60' Roll width includes 1" vinyl edge on each roll side Specify if nosing required on ends</p> <p><b>Size Tolerance</b> +/- 2% on length and width</p> <p><b>Thickness</b> 3/8"</p> <p><b>Face Weight</b> 37 oz/sq yd</p> <p><b>Recommended Installation</b> Apply nosing to end of mats</p>					
<p><b>Possible LEED v 2009 Credits</b></p> <p>MR Credit 4 (1-2 points) IEQ Credit 5 (1 point)</p>					

*miVantage™  
Best runner  
matting  
available*

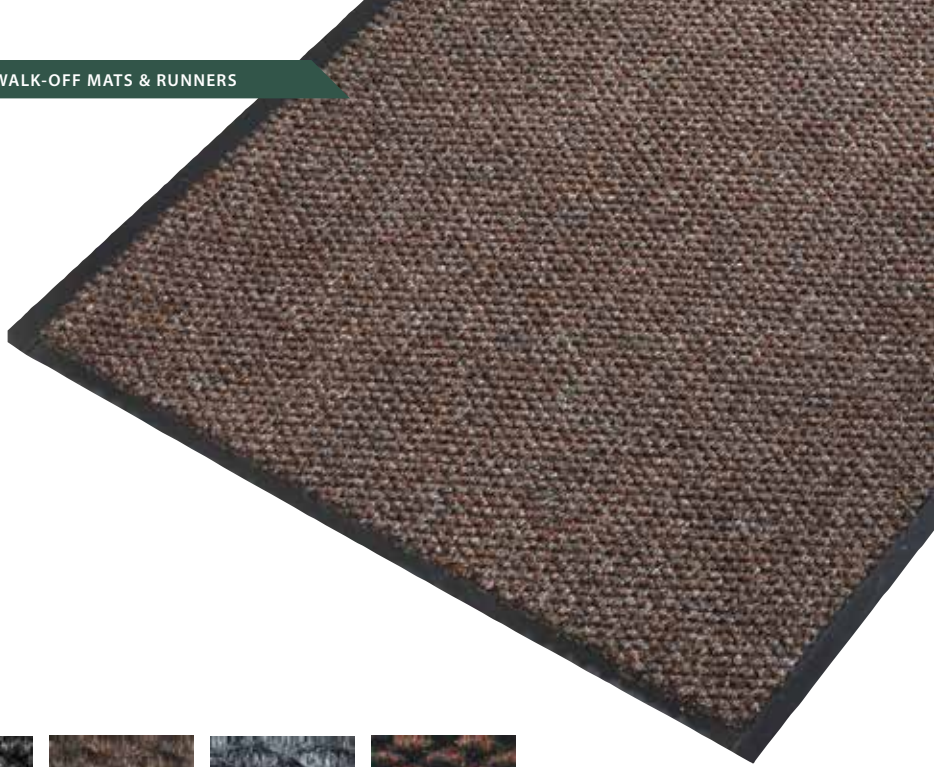


Charcoal



Walnut



Sterling




Rosewood



# Pin Step

Features	Zones
<p>Hobnail design provides effective soil removal</p> <p>Low profile allows easy door clearance</p> <p>An economical matting solution</p> <p>Common Uses—loose lay in medium, multi-directional traffic entrances, vestibules, lobbies, hallways</p>	<p>1 2 3 4</p>
Specifications	
<p><b>Material</b> 100% solution-dyed UV stabilized polypropylene fibers</p> <p><b>Backing</b> Premium non-staining vinyl</p> <p><b>Mat Sizes</b> 2' x 3', 3' x 4', 3' x 5', 3' x 6', 3' x 10', 4' x 6', 4' x 8', 4' x 10'</p> <p><b>Roll Sizes</b> 3' x 60', 4' x 60', 6' x 60'</p> <p><b>Custom Sizes</b> 3', 4' and 6' widths x lengths to 60'</p> <p><b>Size Tolerance</b> +/- 2% on length and width</p> <p><b>Thickness</b> 3/8"</p> <p><b>Face Weight</b> 24 oz/sq yd</p>	
Possible LEED v 2009 Credits	
<p>MR Credit 5 (1-2 points)</p> <p>IEQ Credit 5 (1 point)</p>	



Charcoal




Gray



Sand




Green



Maroon

# Diamond Block


Features	Zones
<p>Rigid construction traps dirt and moisture below the surface</p> <p>Molded rubber edges keep moisture contained</p> <p>Special gripper backing minimizes movement on most carpets and hard surfaces</p> <p>Common Uses—heavy, multi-directional traffic entrances, vestibules, lobbies, hallways</p>	<p>1 2 3 4</p>
Specifications	
<p><b>Material</b> 100% solution-dyed polypropylene fibers with 15% post-consumer recycled content</p> <p><b>Backing</b> SBR cleated rubber—also available with launderable nitrile rubber backing for grease and chemical resistance</p> <p><b>Mat Sizes</b> 2' x 3', 3' x 4', 3' x 5', 3' x 8' 5", 3' x 10', 3' x 12' 3", 3' x 16', 3' x 20', 4' x 6', 4' x 8' 5", 4' x 10', 4' x 12' 3", 4' x 16', 4' x 20', 6' x 8' 5", 6' x 12' 3", 6' x 16', 6' x 20'</p> <p><b>Size Tolerance</b> +/- 2% on length and width</p> <p><b>Thickness</b> 3/8"</p> <p><b>Face Weight</b> 36 oz/sq yd</p> <p><b>Note</b> Standard sizes only, no seaming</p>	
Possible LEED v 2009 Credits	
<p>MR Credit 4 (1-2 points)</p> <p>MR Credit 5 (1-2 points)</p> <p>IEQ Credit 5 (1 point)</p>	



Charcoal




Gray




Brown



Beige



Spruce




Blue



Beaujoulais

# Aqua Block

Features	Zones
<p>Reinforced waffle design provides crush-proof scraping action</p> <p>Holds 1.5 gallons of water per square yard</p> <p>Special gripper backing minimizes movement on most carpets and hard surfaces</p> <p>Common Uses—loose lay in outdoor or indoor settings, entrances, vestibules, lobbies, workstations, hallways</p>	<p>1 2 3 4</p>
Specifications	
<p><b>Material</b> 100% solution-dyed polypropylene fibers</p> <p><b>Backing</b> Nitrile gripper</p> <p><b>Mat Sizes</b> 2' x 3', 3' x 4', 3' x 5', 3' x 10', 3' x 12', 3' x 16', 3' x 20' 4' x 6', 4' x 8', 4' x 10', 4' x 12', 4' x 14', 4' x 16', 4' x 20' 6' x 8', 6' x 12', 6' x 16', 6' x 20'</p> <p><b>Thickness</b> 1/4"</p> <p><b>Face Weight</b> 24 oz/sq yd</p>	
Possible LEED v 2009 Credits	
<p>MR Credit 5 (1-2 points)</p> <p>IEQ Credit 5 (1 point)</p>	

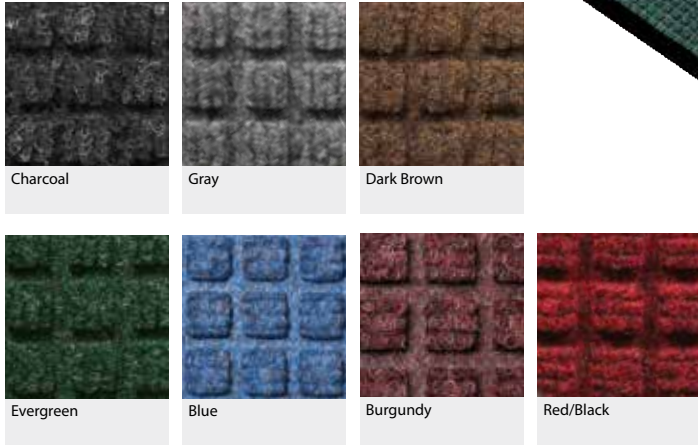

# Olefin

Features	Zones
<p>Quality olefin yarns are expertly tufted</p> <p>Absorbs over one gallon of water per square yard</p> <p>Dries much faster than nylon fibered mats</p> <p>Common Uses—loose lay in medium traffic entrances, vestibules, lobbies, hallways</p>	<p>1 2 3 4</p>
Specifications	
<p><b>Material</b> 100% continuous filament solution-dyed olefin tufted yarn</p> <p><b>Backing</b> Non-staining vinyl</p> <p><b>Mat Sizes</b> 2' x 3', 3' x 4', 3' x 5', 3' x 6', 3' x 10', 4' x 6', 4' x 8', 4' x 10'</p> <p><b>Roll Sizes</b> 3' x 60', 4' x 60', 6' x 60'</p> <p><b>Custom Sizes</b> 3', 4' and 6' widths x lengths to 60'</p> <p><b>Size Tolerance</b> +/-2% on length and width</p> <p><b>Thickness</b> 3/8"</p> <p><b>Face Weight</b> 18 oz/sq yd</p>	
Possible LEED v 2009 Credits	
<p>MR Credit 5 (1-2 points)</p> <p>IEQ Credit 5 (1 point)</p>	



# Tough Rib


Features	Zones
	1 2 3 4
<p>Traditional, high performance indoor/outdoor ribbed mat                      Bi-level rib design offers aggressive walk-off performance                      Ideal for tough indoor applications                      Common Uses—loose lay in medium traffic entrances, vestibules, lobbies, hallways</p>	
<p><b>Specifications</b></p> <p><b>Material</b>                      100% solution-dyed UV stabilized polypropylene fibers</p> <p><b>Backing</b>                      Premium non-staining vinyl</p> <p><b>Mat Sizes</b>                      2' x 3', 3' x 4', 3' x 5', 3' x 6', 3' x 10', 4' x 6', 4' x 8', 4' x 10'</p> <p><b>Roll Sizes</b>                      3' x 60', 4' x 60', 6' x 60'</p> <p><b>Custom Sizes</b>                      3', 4' and 6' widths x lengths to 60'</p> <p><b>Size Tolerance</b>                      +/-2% on length and width</p> <p><b>Thickness</b>                      3/8"</p> <p><b>Face Weight</b>                      24 oz/sq yd</p> <p><b>Pattern</b>                      Ribs run length of roll</p>	
<p><b>Possible LEED v 2009 Credits</b></p> <p>MR Credit 5 (1-2 points)                      IEQ Credit 5 (1 point)</p>	



# Bristle Mat™ Surface System

Features	Zones
	1 2 3 4
<p>Extremely durable, hard-wearing nylon bristles clean footwear with each step                      Resistant to all weather and extreme conditions                      Drop-through construction hides collected dirt from view                      Rolls up for easy handling and maintenance                      Common Uses—loose lay at low, medium or high traffic entrances</p>	
<p><b>Specifications</b></p> <p><b>Material</b>                      Anodized aluminum and vinyl with nylon (6.6) brush inserts; 65.63% pre-consumer recycled content</p> <p><b>Mat Sizes</b>                      18" x 31", 24" x 36"</p> <p><b>Thickness</b>                      7/8"</p> <p><b>Weight</b>                      18" x 31" = 13 lbs                      24" x 36" = 19.4 lbs</p>	
<p><b>Possible LEED v 2009 Credits</b></p> <p>MR Credit 4 (1-2 point)                      IEQ Credit 5 (1 point)</p>	

*miVantage™  
 Superior outdoor mat  
 for high traffic entrances*



# Matting: Anti-Fatigue & Industrial

ZONES 1 2 3 4



*Kushion Safe Light & Floorazzo™*



# Berber Eze

Features	Zones
	1 2 3 4

All the benefits of Berber plus a top-grade rubber sponge backing for outstanding comfort  
 Heel-proof properties for the most demanding applications  
 Stain-resistant, color-fast, and permanently anti-static  
 Common Uses—offices, banks, check-out stations, service counters, pharmacies

### Specifications

**Material**  
 100% solution-dyed UV stabilized polypropylene fibers with 3.86% post-consumer recycled content, bonded to resilient sponge

**Backing**  
 Resilient sponge

**Edges**  
 Standard Nosing (Sew-On) or rounded corners with tapered edges (best in dry settings)

**Roll Widths**  
 3', 4', 6', 6' 7", 13' 2"

**Tile Size**  
 17" x 17"  
 12 tiles (4 sq ft) per case

**Custom Sizes**  
 3', 4', 6', 6' 7", 13' 2" x 50' - minimums may apply

**Thickness**  
 5/8"


**Options**  
 Rounded corners, beveled edges, consult a Product Specialist about other "Eze" rubber sponge backed products  
 Colors available in tiles

**Recycled Content**  
 Berber Eze: 3.86% post-consumer  
 Berber Eze Tile: 2.07% pre-consumer, 4.65% post-consumer

*miVantage™*  
 Heel-proof and stain-resistant comfort

### Possible LEED v 2009 Credits

MR Credit 4 (1-2 points)  
 MR Credit 5 (1-2 points)  
 IEQ Credit 4.1 (1 point)



Roll See Colors Also Available as Tile



# Cushion Eze

Features	Zones
	1 2 3 4

Durable, marbled top surface bonded to fatigue-fighting sponge  
 Beveled edges on all four sides create a safe transition on and off the mat  
 Greater wearability than single layer foam mats  
 Not heel proof  
 Common Uses—work stations, cash registers, service counters, salons, industrial settings

### Specifications

**Material**  
 Marbleized high-grade top surface bonded to resilient sponge

**Style**  
 Smooth surface

**Backing**  
 Resilient sponge

**Edges**  
 Beveled with rounded corners or square edge

**Mat Sizes**  
 18" x 30", 18" x 48", 2' x 3', 3' x 4', 3' x 5', 36" x 64"



**Roll Sizes**  
 2' x 60', 3' x 60', 4' x 60'

**Custom Sizes**  
 2', 3' and 4' widths x lengths to 60'

**Thickness**  
 3/8" or 1/2"

### Possible LEED v 2009 Credits

MR Credit 5 (1-2 points)

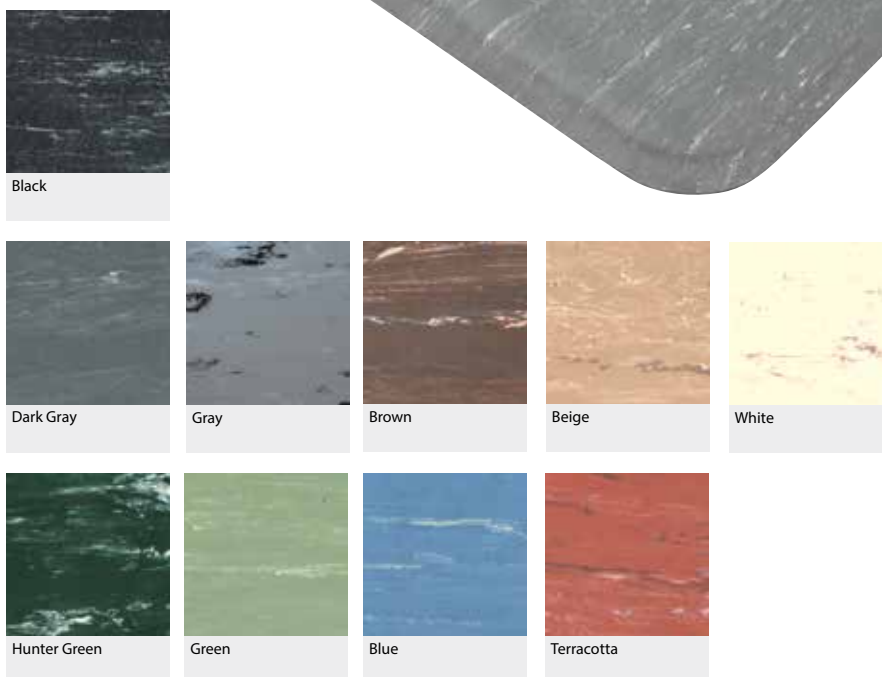

# 3M™ Safety-Walk™ Cushion Matting 3270

Features	Zones	1	2	3	4
<p>Spring-coiled vinyl compresses uniformly and continually, helping provide greater comfort and less fatigue</p> <p>Textured top surface provides a high coefficient of friction for slip resistance</p> <p>Coils are permanently fixed to the top surface and will not delaminate or separate when wet like foam mats</p> <p>Lightweight for easy moving and positioning</p> <p>Common Uses—light to medium industrial applications, shop and canteen counters, packing lines, warehouses</p>					
<b>Specifications</b>					
<b>Roll Sizes</b> 4' x 65'					
<b>Standard Sizes</b> 3270 - 3' x 10', 3' x 20' 3270E - 3' x 5', 3' x 10', 3' x 20', 4' x 6', 4' x 10'					
<b>Custom Sizes</b> 3270 - 4' width x custom lengths up to 65'					
<b>Standard Edging</b> 3270 - none 3270E - heat embossed on all sides					
<b>Possible LEED v 2009 Credits</b>					
MR Credit 5 (1-2 points)					


**miVantage™**  
Ideal for light industrial and light to medium commercial applications where people stand for extended periods of time



# 3M™ Safety-Walk™ Cushion Matting 5270

Features	Zones	1	2	3	4
<p>Spring-coiled vinyl compresses uniformly and continually, helping provide greater comfort and less fatigue</p> <p>Textured top surface provides a high coefficient of friction for slip resistance</p> <p>Solid top allows debris to stay on top of the mat for easy cleaning</p> <p>Special grease- and oil-resistant coating keeps mat resilient over time, providing continuous comfort</p> <p>Ideal for the workplace where people stand for extended periods of time</p> <p>Common Uses—light to medium industrial applications, shop and canteen counters, packing lines, warehouses</p>					
<b>Specifications</b>					
<b>Roll Sizes</b> 3', 4' x 65'					
<b>Standard Sizes</b> 5270E - 3' x 2', 3' x 5', 3' x 10', 3' x 20', 4' x 6', 4' x 20'					
<b>Custom Sizes</b> 5270 - 3' and 4' widths x custom lengths up to 65'					
<b>Standard Edging</b> 5270 - none 5270E - heat embossed on all sides					
<b>Possible LEED v 2009 Credits</b>					
MR Credit 5 (1-2 points)					



**miVantage™**  
Designed for light to medium industrial areas where people stand for extended periods of time

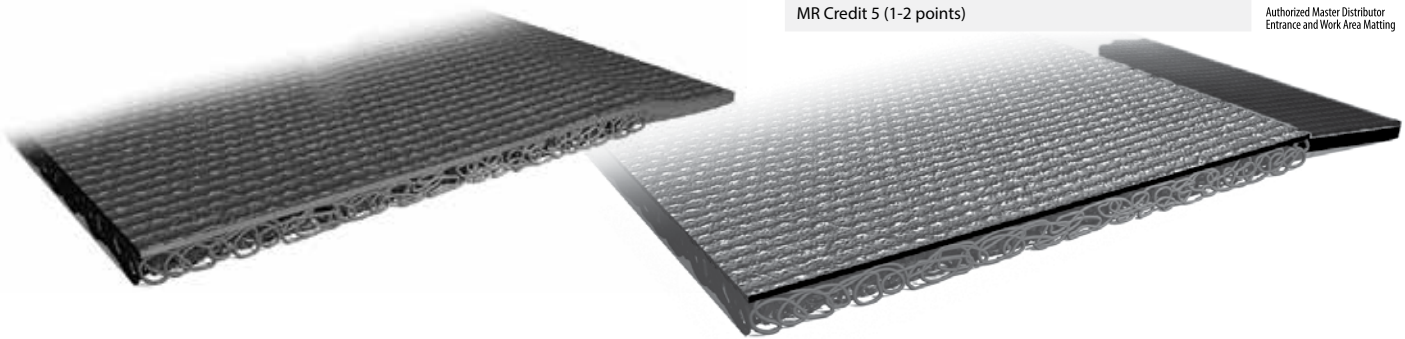

# 3M™ Safety-Walk™ Cushion Matting 5100

Features	Zones	1	2	3	4
<p>Rigid vinyl z-web construction provides firm support and allows cart traffic</p> <p>Extended ridge design provides increased traction in wet areas, helping reduce slips and falls</p> <p>Open z-web design allows liquids and small debris to fall through enhancing the security of footing</p> <p>Ideal for the workplace where people stand for extended periods of time</p> <p>Common Uses—dishwashing stations, deli departments, food prep areas</p>					
<b>Specifications</b>					
<b>Roll Sizes</b> 3' x 50'					
<b>Custom Sizes</b> 3' widths x custom lengths up to 50'					
<b>Standard Sizes</b> 3' x 5', 3' x 10', 3' x 20'					
<b>Edging</b> Not recommended					
<b>Possible LEED v 2009 Credits</b>					
MR Credit 5 (1-2 points)					

**miVantage™**  
Provides comfort and safety for wet areas in the workplace where people stand for extended periods of time

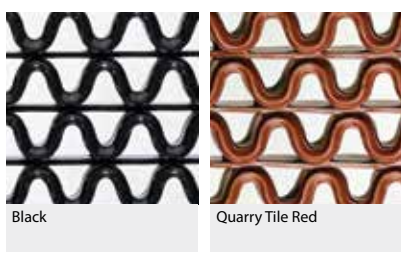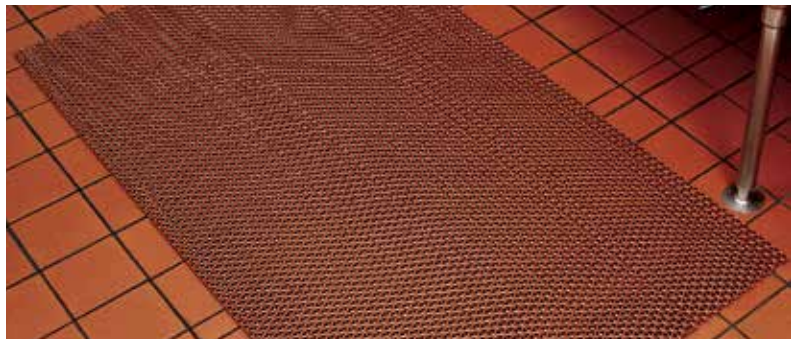

Black

Quarry Tile Red

# Bubble Mat

Features	Zones
	1 2 3 4

The ultimate anti-fatigue mat ... dozens of air pockets provide all-day comfort  
 Resilient rubber construction does not compress over time  
 Molded safety edges on all sides eliminate potential tripping hazards  
 Common Uses—work stations, cash registers, service counters, industrial settings

*miVantage™  
 The ultimate anti-fatigue mat ... dozens of air pockets provide all-day comfort*

### Specifications

**Material**  
 Premium black molded rubber with 27% pre-consumer and 27% post-consumer recycled content

**Style**  
 Raised bubble pattern


**Backing**  
 Hollow "air dome"

**Mat Sizes**  
 2' x 3'; 3' x 4'

**Thickness**  
 1/2"

### Possible LEED v 2009 Credits

MR Credit 4 (1-2 points)



Black

# Ergorunner

Features	Zones
	1 2 3 4

Economical, slip-resistant, anti-fatigue matting for areas with water or where slips occur  
 Unique tubular design is effective and long lasting  
 Open grid drainage  
 Chemical and oil-resistant  
 Easy to clean with mild household detergent  
 Easy to roll up and store  
 Common Uses— light industrial applications, shop and canteen counters, packing lines, warehouses

### Specifications

**Material**  
 Slip-resistant, self-draining PVC cushion matting

**Style**  
 Open Grid pattern

**Roll Sizes**  
 2' x 33'; 3' x 33'


**Thickness**  
 3/8"

**Weight**  
 0.77 lbs/sq ft

**Recycled Content**  
 20% post-consumer

### Possible LEED v 2009 Credits

MR Credit 4 (1-2 points)

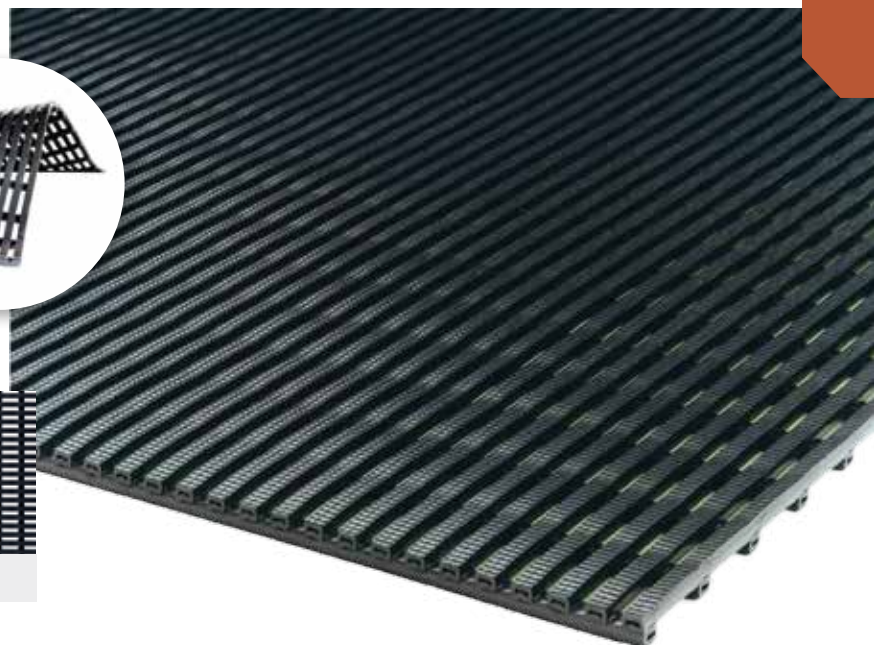


Black




# Kushion Safe

Features	Zones
<ul style="list-style-type: none"> <li>High-performance drainage and anti-fatigue safety mat</li> <li>Slip-resistant surface</li> <li>Resists mold and mildew growth</li> <li>Available in grease-proof or grease-resistant compounds</li> <li>Common Uses—commercial kitchens, restaurants, bars, meat rooms, food service, locker rooms, sport facilities</li> </ul>	<div style="display: flex; gap: 5px;"> <span>1</span> <span>2</span> <span>3</span> <span>4</span> </div>
<b>Specifications</b>	
<p><b>Material</b> Molded rubber with 3% pre-consumer and 85% post-consumer recycled content</p> <p><b>Style</b> Honeycomb pattern</p> <p><b>Edges</b> Square edge</p> <p><b>Standard</b> 3' x 5' square edge</p> <p><b>Thickness</b> 3/4"</p>	
<b>Possible LEED v 2009 Credits</b>	
MR Credit 4 (1-2 points)	

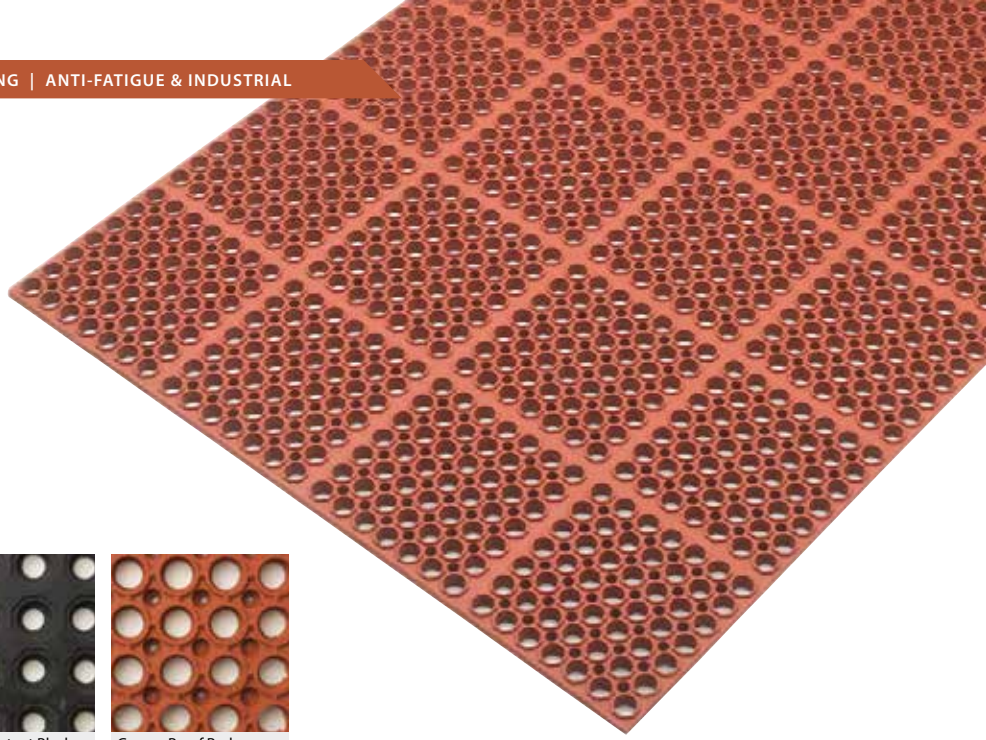

Grease-Resistant Black





Grease-Proof Red




# Kushion Safe Light

Features	Zones
<ul style="list-style-type: none"> <li>Multipurpose anti-fatigue mat</li> <li>Superior drainage</li> <li>Grease and chemical resistance</li> <li>Molded beveled edges on all sides</li> <li>Common Uses—kitchens, restaurants, bars, meat rooms, food service, industrial work stations and sport facilities</li> </ul>	<div style="display: flex; gap: 5px;"> <span>1</span> <span>2</span> <span>3</span> <span>4</span> </div>
<b>Specifications</b>	
<p><b>Material</b> Molded rubber with recycled content (Black 27% pre-consumer and 27% post-consumer; Red 11% pre-consumer, 11% post-consumer)</p> <p><b>Style</b> Honeycomb pattern Black: grease-resistant Red: grease-proof</p> <p><b>Edges</b> Beveled edge</p> <p><b>Standard</b> 3' x 5' beveled edge</p> <p><b>Thickness</b> 1/2"</p>	
<b>Possible LEED v 2009 Credits</b>	
MR Credit 4 (1-2 points)	

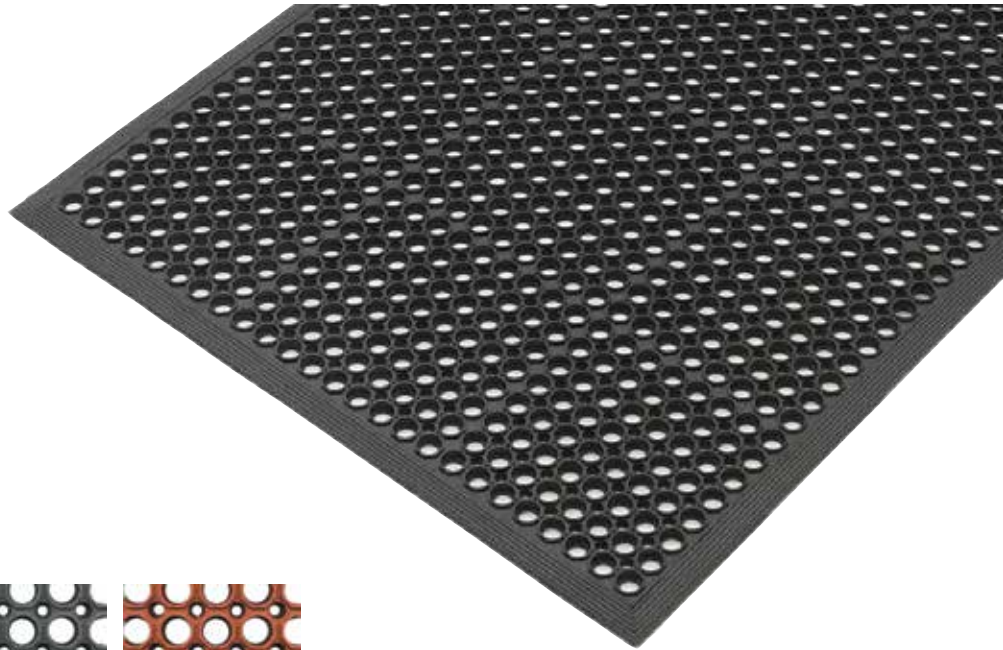

Grease-Resistant Black



Grease-Proof Red



# 3M™ Safety-Walk™ Wet Area Matting 3200

**Features**      **Zones**   1   2   3   4

Z-web design provides uniform foot support  
 Durable - won't flatten over time  
 Open construction allows water to drain through, helping keep surfaces drier  
 Enhances slip resistance, helping reduce falls  
 Anti-microbial coating provides resistance to mildew, fungus and odors in the mat  
 Common Uses—poolside, locker rooms, hydrotherapy rooms, saunas

*miVantage™ Remarkable slip resistance in wet areas with heavy traffic*


**Specifications**

**Roll Sizes**  
 3' x 50'  
**Standard Mat Sizes**  
 3' x 10', 3' x 20'  
**Custom Sizes**  
 3' width x custom lengths up to 50'  
**Edging**  
 Not recommended


**Possible LEED v 2009 Credits**

MR Credit 5 (1-2 points)


**3M**  
 Authorized Master Distributor  
 Entrance and Work Area Matting



Blue



Tan



# 3M™ Safety-Walk™ Wet Area Matting 1500

**Features**      **Zones**   1   2   3   4

Cushioned vinyl loops provide comfortable surface for barefoot traffic  
 Coiled vinyl loops reduce impact of dropped items that may otherwise shatter and be a danger to barefoot traffic  
 Open construction allows water to drain through, helping keep surfaces drier  
 Improves slip resistance, helping reduce falls  
 Anti-microbial coating provides resistance to mildew, fungus and odors in the mat  
 Common Uses—poolside, locker rooms, beneath water fountains

*miVantage™ Comfort and safety for barefoot traffic*

**Specifications**

**Roll Sizes**  
 3' x 82'  
**Standard Mat Sizes**  
 3' x 20'  
**Custom Sizes**  
 3' width x custom lengths up to 82'  
**Edging**  
 Not recommended


**Possible LEED v 2009 Credits**

MR Credit 5 (1-2 points)

**3M**  
 Authorized Master Distributor  
 Entrance and Work Area Matting




Blue




Green



# Eco Tile

Features	Zones
<p>Long wearing, industrial tile protects concrete, wood or asphalt from the wear and tear of heavy equipment Common Uses—garages, warehouses, production areas, loading docks, showrooms, trade show floors, retail stores, and areas with hydrostatic pressure problems</p>	<p>1 2 3 4</p>
<p><b>Specifications</b> </p>	
<p><b>Material</b> Injection molded PVC made from 100% post-consumer recycled content in Black and Gray and 70% post-consumer content in all others colors</p>	
<p><b>Backing</b> Waffle pattern</p>	
<p><b>Surface Design</b> Raised Disc or Pebble Grain (minimums may apply)</p>	
<p><b>Tile Size</b> 19-5/8" x 19-5/8"</p>	
<p><b>Weight</b> 4.23 lbs/tile</p>	
<p><b>Thickness</b> 1/4"</p>	
<p><b>Chemical Resistance</b> (ASTM F925) Best</p>	
<p><b>Critical Radiant Flux</b> (ASTM E648) Class 1</p>	
<p><b>Static Coefficient of Friction</b> (ASTM D2047) Conforms to ADA Guidelines</p>	
<p><b>Hardness (Shore A)</b> (ASTM D2240) 90</p>	
<p><b>Options</b> Eco-edging, beveled edges</p>	
<p><b>Possible LEED v 2009 Credits</b></p>	
<p>MR Credit 4 (1-2 points) MR Credit 5 (1-2 points)</p>	

*miVantage™  
Modular  
alternative  
to expensive  
epoxy  
concrete  
coating*

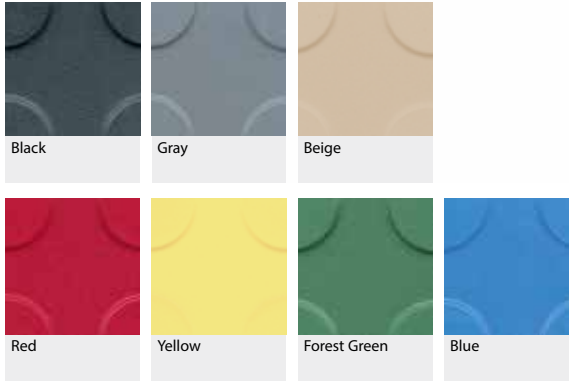


All colors are also available in Pebble Grain Surface



# Drain Tile


Features	Zones
<p>Versatile, very flexible anti-slip drainage mat provides safe footing in wet areas "Snap together" tiles are quick and easy to assemble Easy to clean, anti-bacterial additive prevents mildew Common Uses—pools, health clubs, locker rooms, shower areas, hot tubs, saunas, ski lodges, kitchens, scrub sinks, restrooms, workstations, entrances</p>	<p>1 2 3 4</p>
<p><b>Specifications</b></p>	
<p><b>Material</b> Molded PVC with anti-bacterial additive</p>	
<p><b>Style</b> Molded interlocking tile</p>	
<p><b>Backing</b> Drop through</p>	
<p><b>Size</b> 12" x 12" tiles 3' x 4' or 3' x 12' pre-assembled panels</p>	
<p><b>Case Pack</b> 50 tiles/case, 12 tile minimum</p>	
<p><b>Thickness</b> 9/16"</p>	
<p><b>Options</b> 2" x 12" beveled edge, 2" x 2" beveled corner</p>	
<p><b>Possible LEED v 2009 Credits</b></p>	
<p>MR Credit 5 (1-2 points)</p>	

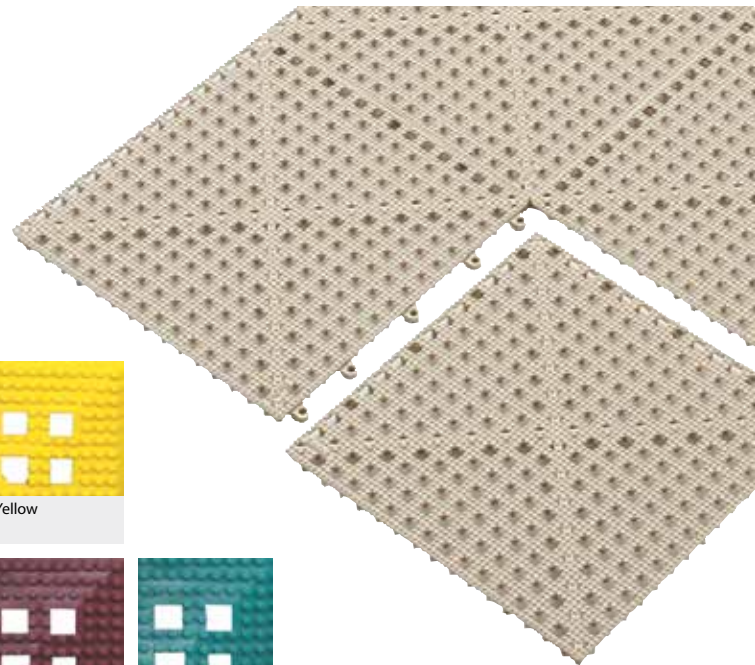

# Outdoor

ZONES

- 1
- 2
- 3
- 4

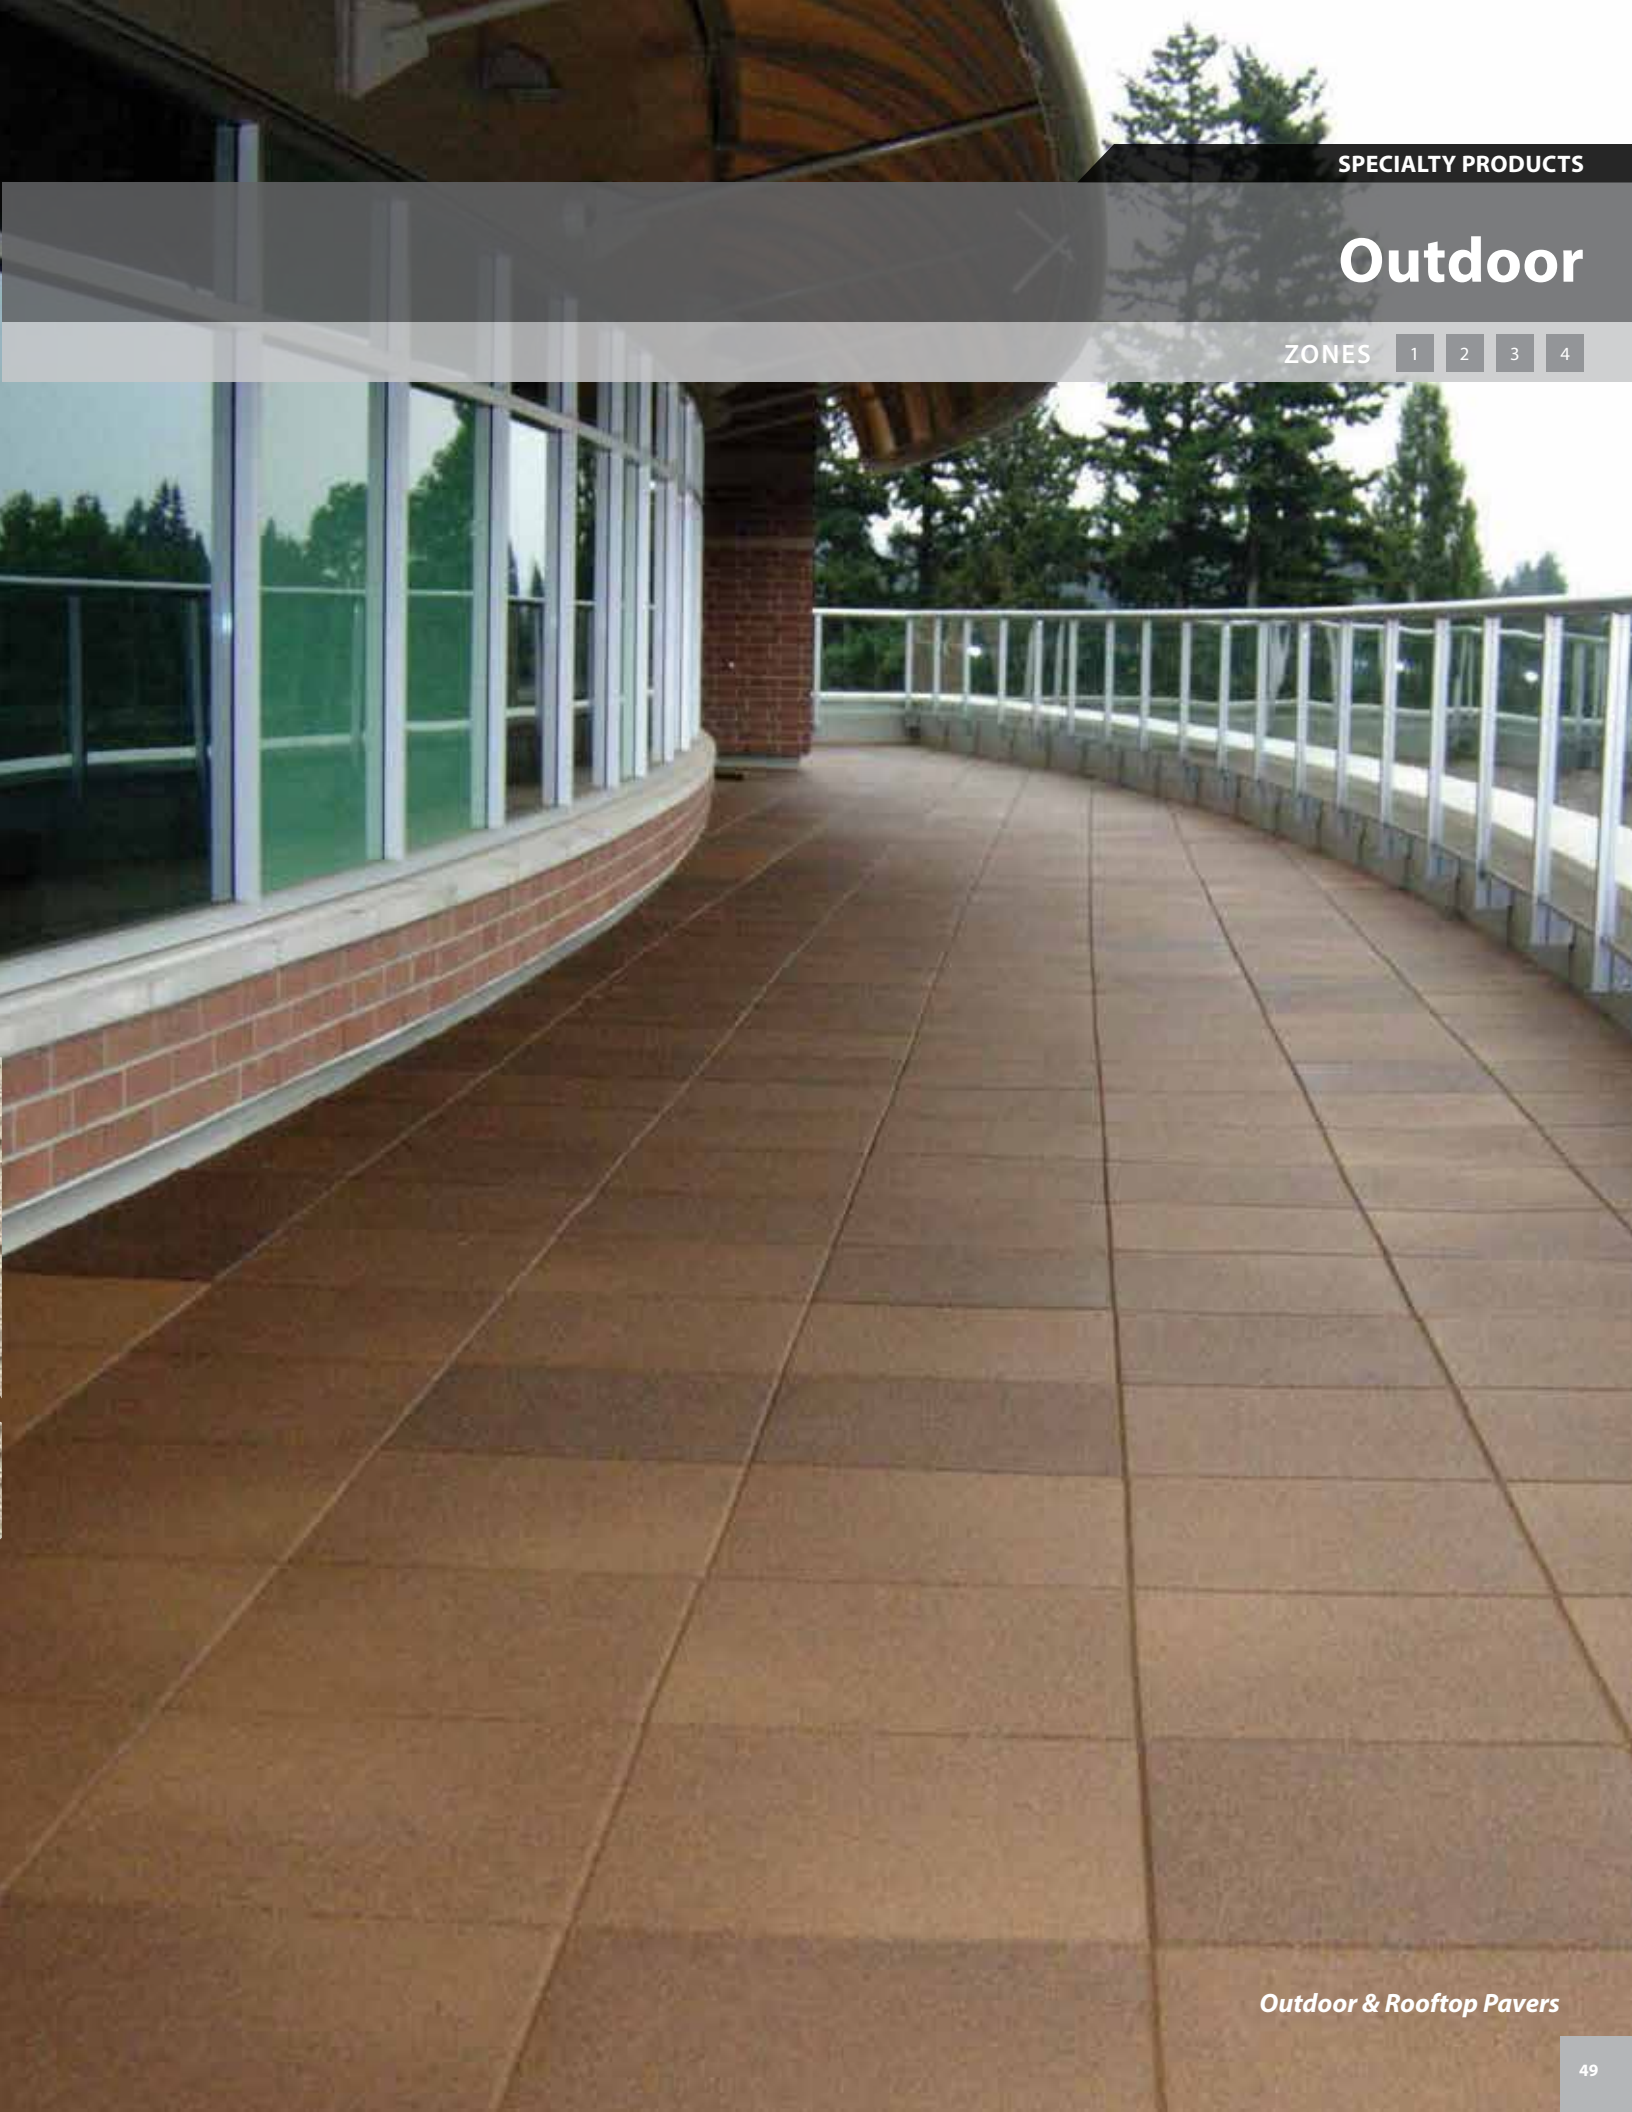

# Outdoor & Rooftop Pavers

**Features**

Zones **1** 2 3 4

Tiles provide superior noise reduction and impact absorption  
 Slip, frost and stain-resistant  
 Water permeable and light weight texture  
 Minimal maintenance required  
 Sustainable product manufactured from recycled materials  
 No adhesive needed  
 Common Uses—rooftops, patios, green roofs, walkways, gardens

*miVantage™  
 Lighter weight  
 and won't  
 crack or break  
 like cement  
 pavers*

**Specifications**

**Material**  
 Recycled rubber

**¾" Pavers Interlocking & Non-Interlocking Tiles**

**Surface Design**  
 Smooth or Brick

**Tile Size**  
 Interlocking = 24" x 24" (61 cm x 61 cm)  
 Non-Interlocking = 23-3/4" x 23-3/4" (60 cm x 60 cm)

**Thickness**  
 3/4" (19 mm)

**Weight**  
 Interlocking = 4.375 lbs/sq ft  
 Non-Interlocking = 3.875 lbs/sq ft

**Note**  
 Can be used for rooftop applications.  
 Drainage system may be required.

**Recycled Content**  
 100% Black = 90% post-consumer  
 Beige, Brown, Green, Red = 87% post-consumer  
 75% color = 49% post-consumer and 7% pre-consumer  
 50% color = 56% post-consumer and 6% pre-consumer  
 25% color = 65% post-consumer and 4% pre-consumer

**1¾" and 2½" Interlocking Tiles**

**Surface Design**  
 Smooth

**Size**  
 24" x 24" (61 cm x 61 cm)

**Thickness**  
 1-3/4" (44 mm), 2-1/2" (63 mm)

**Weight**  
 1-3/4" = 6 lbs/sq ft  
 2-1/2" = 7.25 lbs/sq ft

**Recycled Content**  
 100% Black = 14% post-consumer and 72% pre-consumer  
 Beige, Brown, Green, Red = 14% post-consumer and 71% pre-consumer  
 75% color = 8% post-consumer and 70% pre-consumer  
 50% color = 9% post-consumer and 72% pre-consumer  
 25% color = 11% post-consumer and 73% pre-consumer


**Possible LEED v 2009 Credits**

MR Credit 4 (1-2 points)  
 MR Credit 5 (1-2 points)  
 IEQ Credit 4.1 (1 point)




**Backing for 1¾" and 2½" Pavers**  
 Water flow designed backing—Ideal for landscape applications


**Interlocking Tile System**

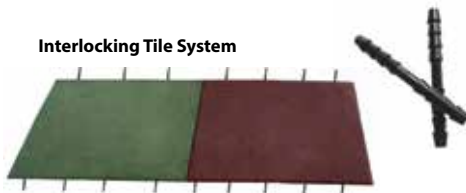

**Pigment**

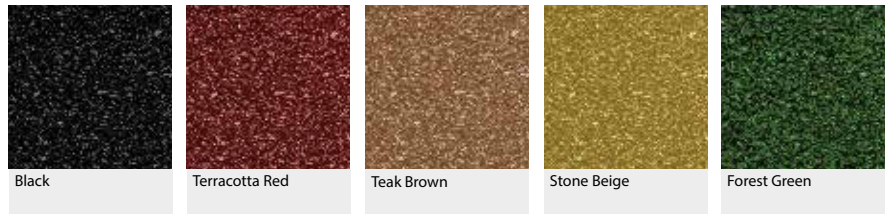

**25% Intensity**  
 Also available in 50% and 75% color intensities

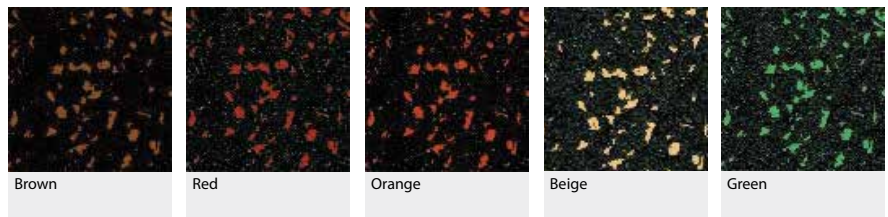

**Smooth and Brick Top Designs**


Brick design available in 3/4" thickness only






# SaniPath™

Features	Zones
	1 2 3 4
<p>Comfortable for bare feet                      Provides slip resistance                      Antimicrobial and antifungal additives are infused during production                      UV-Resistant                      Instant 4-way water drainage                      Easy handling for cleaning and storage                      Easy to clean with mild household detergent                      Minimum 30% post-consumer recycled PVC content                      Common Uses—rooftops, decks, locker rooms, showers/stalls, poolside, jacuzzis, docks, anywhere there is wet flooring</p>	
Specifications	
<p><b>Material</b>                      Open grid PVC matting with slip-resistant surface, antibacterial/antifungal additives, and instant 4-way water drainage</p> <p><b>Roll Sizes</b>                      2' x 33', 3' x 33'</p> <p><b>Thickness</b>                      3/8"</p> <p><b>Weight</b>                      0.75 lbs/sq ft</p> <p><b>Recycled Content</b>                      30% post-consumer</p>	
Possible LEED v 2009 Credits	
<p>MR Credit 4 (1-2 points)</p>	



Black



Oxford Blue




Buff




# Skypath

Features	Zones
	1 2 3 4
<p>Withstands extreme wind (up to 94 mph) and weather conditions                      Diamond cut design provides slip resistance and sure footing                      Compatible with vinyl roofing membranes                      Open grid design encourages fast water drainage                      Easy to cut to size and install                      Easy to roll up and store                      UV-resistant Gray color helps distinguish frosty or dewy surfaces                      Common Uses—rooftop walkways, access to HVAC and telecommunications equipment on rooftops</p>	
Specifications	
<p><b>Material</b>                      Open grid, self draining, non-porous, PVC roof walkway matting system</p> <p><b>Roll Sizes</b>                      2' x 33', 3' x 33'</p> <p><b>Thickness</b>                      5/8"</p> <p><b>Weight</b>                      1.33 lbs/sq ft</p>	

**miVantage™**  
*Specifically designed to protect flat roof membranes from pedestrian foot traffic*



Gray

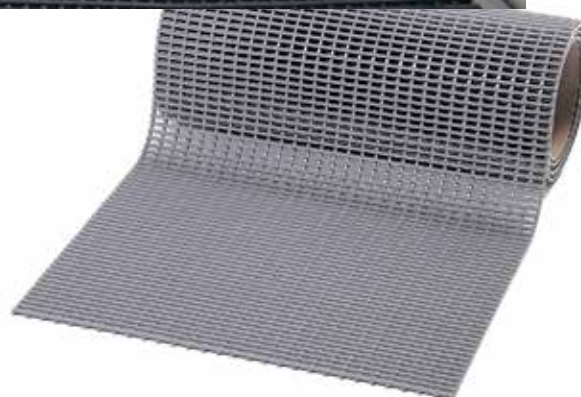

# Multipurpose


ZONES 1 2 3 4



# MultiLino™

Features	Zones
Multipurpose sports floor system withstands high intensity indoor sports including basketball, volleyball and In-line skating Environmentally-friendly, made from renewable materials; biodegradable DIN Certified Common Uses—multipurpose recreation facilities, basketball courts, floor hockey, racquet sports, and volleyball courts	1 2 3 4
Specifications	
<b>Material</b> Linoleum top layer with MultiLino™ FM or WDK subsystem	
<b>Roll Size</b> 6' 7" x 88' 6"	
<b>Custom Sizes</b> 6' 7" x lengths up to approximately 88' 6"- 93'	
<b>Top Layer Thickness</b> 4 mm	
<b>Additional Specifications</b> ASTM E648 Class 1, DIN Certified, FloorScore® Certified	
Possible LEED v 2009 Credits	
MR Credit 4 (1-2 points) MR Credit 6 (1 point) IEQ Credit 4.3 (1 point)	


**miVantage™**  
 Superior multipurpose floor with highest performance for intense sports

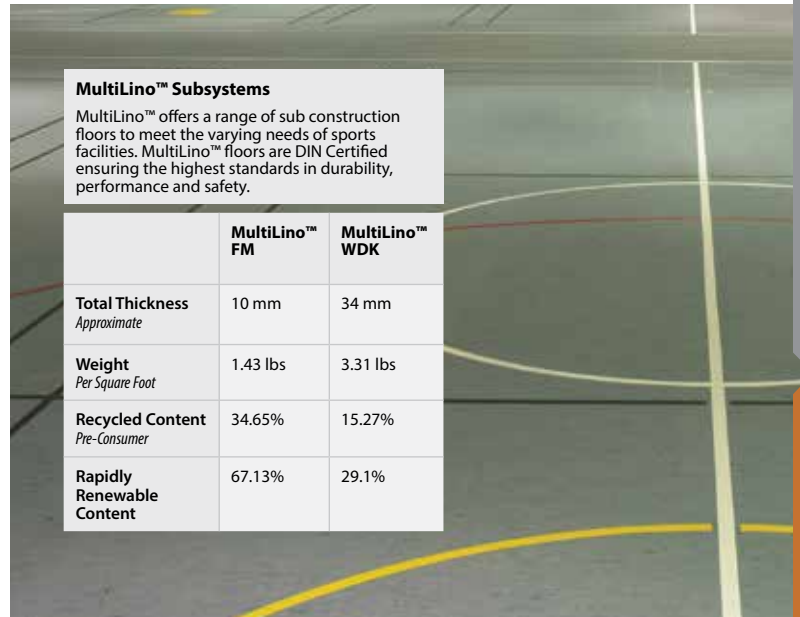

	MultiLino™ FM	MultiLino™ WDK
<b>Total Thickness</b> <i>Approximate</i>	10 mm	34 mm
<b>Weight</b> <i>Per Square Foot</i>	1.43 lbs	3.31 lbs
<b>Recycled Content</b> <i>Pre-Consumer</i>	34.65%	15.27%
<b>Rapidly Renewable Content</b>	67.13%	29.1%

## MultiLino™ FM


### Point Elastic

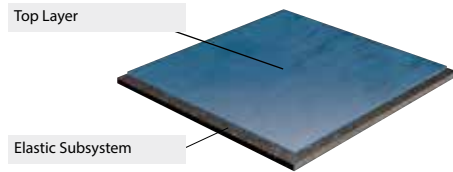

Construction Height: 10 mm

## MultiLino™ WDK

### Area Elastic

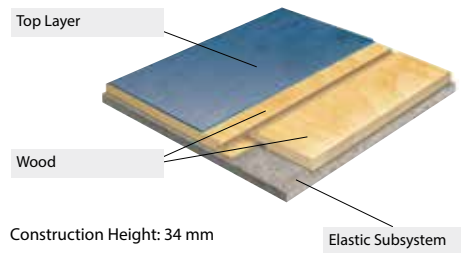

Construction Height: 34 mm

### Top Layer Color Options

#### MultiLino™ Marbleized

\* Colors available with PU coated top surface



#### MultiLino™ Flecked



#### MultiLino™ Wood Grain



# Woodflex™

## Features

Realistic wood look with benefits of a synthetic floor; hygienic, antibacterial properties  
 Low maintenance costs—never needs sanding or refinishing  
 Common Uses—multipurpose recreation facilities, gymnasiums, church/assembly halls, dance studios and aerobics/fitness studios

## Specifications

**Material**  
High performance vinyl

**Roll Size**  
6'7" x 49' 2"

**Top Layer Thickness**  
1.3 mm

**Total Thickness**  
6 mm, 6.7 mm, 8 mm  
(also available in 10 mm, minimums may apply)

**Weight**  
6 mm = 0.76 lb/sq ft  
6.7 mm = 0.84 lb/sq ft  
8 mm = 0.88 lb/sq ft

**Options**  
Use urethane paints for game line painting

## Possible LEED v 2009 Credits

MR Credit 4 (1-2 points)  
IEQ Credit 4.1 (1 point)

*miVantage™  
Outstanding  
flooring  
solution for  
multipurpose  
rooms—  
ideal for  
competitive  
play*




Maple  
1001




## UV-Cured PUR Reinforced Tech Surface System


With embedded micronized aluminum oxide—It's not a finish so it won't wear down

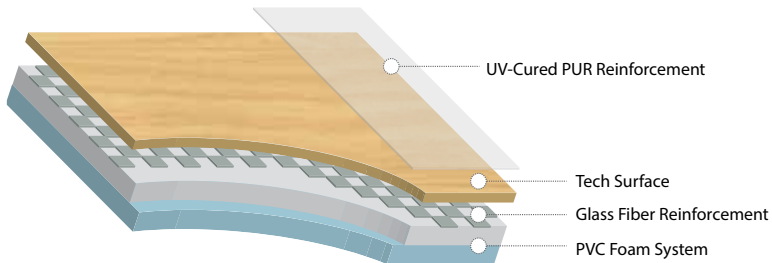


# Gameflex®

Features	Zones	1	2	3	4
Vibrant, fun colors Complements Woodflex™ Excellent shock absorbency to protect athletes Extremely hygienic; non-porous surface has bactericidal and fungicidal treatment Common Uses—multipurpose recreation facilities, gymnasiums, church/assembly halls, dance studios and aerobics/fitness studios					
<b>Specifications</b> 					
<b>Material</b> High performance vinyl					
<b>Roll Size</b> 6' 7" x 49' 2"					
<b>Top Layer Thickness</b> 1.3 mm					
<b>Total Thickness</b> 6 mm, 6.7 mm, 8 mm (also available in 10 mm, minimums may apply)					
<b>Weight</b> 6 mm = 0.76 lb/sq ft 6.7 mm = 0.78 lb/sq ft 8 mm = 0.86 lb/sq ft					
<b>Options</b> Use urethane paints for game line painting					
<b>Possible LEED v 2009 Credits</b>					
MR Credit 4 (1-2 points) IEQ Credit 4.1 (1 point)					

*miVantage™  
Outstanding  
flooring  
solution for  
multipurpose  
rooms—  
ideal for  
competitive  
play*

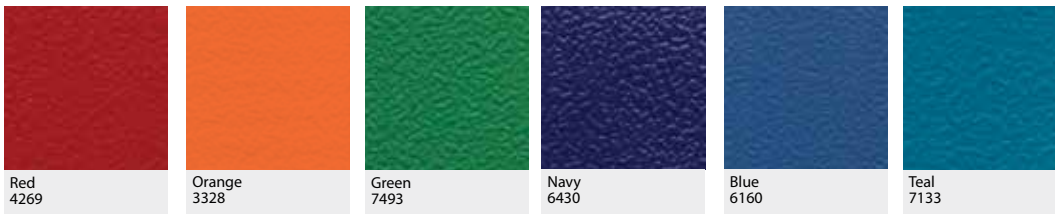

## Underfloor SL

Features	Zones	1	2	3	4
Prevents moisture from passing through to the floor foundations Keeps your floor covering stable Makes updating flooring over time easier					
<b>Specifications</b> 					
<b>Material</b> Specially coated fiberglass reinforced moisture barrier sheet underlay					
<b>Roll Size</b> 4' 9" x 82'					
<b>Weight</b> 0.33 lb/sq ft					
<b>Thickness</b> 1.4 mm					
<b>Recycled Content</b> 5.5% pre-consumer					
<b>Possible LEED v 2009 Credits</b>					
MR Credit 4 (1-2 points)					



*Creates a floating floor on sub-floors with moisture challenges or for installations over existing floors.*

# Debolon MP

## Features

Never needs waxing, stripping or buffing  
 Highly sound absorbent  
 Cost effective alternative to VCT and carpet  
 Highly durable, extremely hygienic, long-lasting  
 DIN tested for ball rebound and sliding coefficient  
 Common Uses—aerobics/fitness studios, recreation facilities, yoga studios, multipurpose rooms, schools, cafeteriums and gymnasium

## Specifications

### Material

Heterogeneous floor covering with glass fiber reinforcement. Traffic-rated for heavy commercial/light industrial use with a proprietary UV-cured PUR top surface.

### Roll Size

6' 7" x 65' 7"

### Thickness

3.3 mm

### Weight

0.58 lb/sq ft

### Seaming Options

Heat weld with Debolon weld rod, chemical weld with Mats Inc. Chemical Weld Adhesive

### Recommended Installation

Glue down sheets

### Possible LEED v 2009 Credits

MR Credit 4 (1-2 points)

MR Credit 6 (1 point)

IEQ Credit 4.1 (1 point)

IEQ Credit 4.3 (1 point)



Golden Oak  
247 304



Teak  
248 304




Birch  
260 303



New Wood  
248 305

## Debolon MP

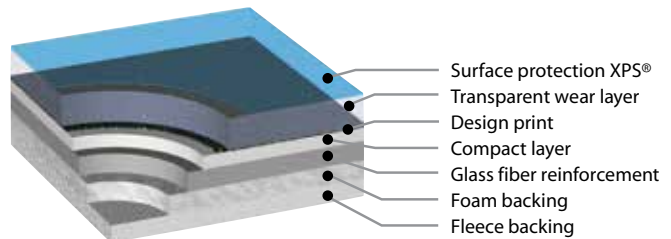

# Pro Shield

## Features

Giant-sized tiles protect gym floors  
 Easy to handle for quick set up and break down  
 Plus Backing keeps floors clean  
 Common Uses—universities, multipurpose facilities,  
 convention halls

## Zones

1 2 3 4

## Specifications

### Material

100% solution-dyed polypropylene

### Backing

Polyolefin Plus backing

### Tile Size

39-3/8" x 78-3/4"

### Thickness

6 mm

### Weight

91.4 oz/sq yd

### Slip Resistance

(ASTM C1028) 0.61 Dry and 0.54 Wet

### Note

Minimums apply, consult our Product Specialists for assistance



Gray



Blue



*Polyolefin Plus Backing keeps floors clean*



SPORTS FLOORING

# Weight Rooms & Fitness

ZONES 1 2 3 4



Spectation™



# Spectation™

## Features

Hammered finish and multicolor speckle design  
Shock absorbing backing  
Common Uses—health clubs, weight rooms, ice arenas, ski areas, locker rooms, rest rooms, recreation and multipurpose facilities

*miVantage™  
Heavy-duty  
rubber with  
non-porous  
surface*

## Specifications

### Material

Dual durometer vulcanized rubber, made with 35% pre-consumer recycled rubber

### Tile Size

Square Edge Tile = 39.37" x 39.37"  
Interlocking Tile = 38.58" x 38.58"

### Top Layer Thickness

2.5 mm

### Total Thickness

Square Edge Tile = 9 mm  
Interlocking Tile = 9 mm

### Weight

Square Edge Tile = 2.4 lbs/sq ft  
Interlocking Tile = 2.2 lbs/sq ft

### Critical Radiant Flux (ASTM E648) Class 1

### Chemical Resistance (EN423) Good

### Rapidly Renewable Content 27%

### Minimum Order

\* Minimum order quantities may apply

## Possible LEED v 2009 Credits

MR Credit 4 (1-2 points)

MR Credit 6 (1 point)



Red Snapper \*



Blue Fin \*



Plankton \*



Trout \*



Blaze \*



Nautical



Pheasant



Bunker



Gatorade \*



Swordfish



Georgetown



Gray Cast



# Combination Sport Tile

**Features** **Zones** 1 2 3 4

Waffle backing for sound reduction and impact absorption  
 Easy-to-clean surface  
 Extremely durable and long lasting  
 Dowel connection system allows for free-floating installation  
 No adhesive necessary  
 Ideal for 2nd floor or higher and penthouse  
 Available in 1-1/2" thickness for free weight stations and 1" for cardio areas  
 Common Uses—strength training facilities, fitness centers

*miVantage™  
 Ideal for  
 2nd floor or  
 higher and  
 penthouse*

**Specifications**

**Material**  
 100% post-consumer recycled SBR, EPDM rubber and polyurethane binder

**Tile Size**  
 24" x 24"

**Weight**  
 6.75 lbs/sq ft (25 lbs/tile)

**Total Thickness**  
 1-1/2", also available in 1"

**Wear Layer Thickness**  
 6 mm

**Sound Insulation**  
 (ASTM E492) F11C 61

**Slip Resistance**  
 (ASTM C1028) 0.79 Dry and 0.81 Wet

**Critical Radiant Flux**  
 (ASTM E648 ) Class 2: 0.22 – 0.44 w/cm<sup>2</sup>


**Recycled Content**  
 100% Black: 90.1% post-consumer  
 20% color: 0.5% pre-consumer, 87.4% post-consumer  
 50% color: 1.4% pre-consumer, 82.9% post-consumer  
 90% color: 3% pre-consumer, 74.9% post-consumer

**Accessories**  
 Finishing kit: fill in cuts around posts and play structure mounts.  
 Transition wedge: 19-1/2" long x 6" wide  
 Outside corner wedge: 9-3/4" long (inside edge) x 6" wide  
 Inside corner wedge: 9-3/4" long (outside edge) x 6" wide  
 Interlocking pins: 4" long x 5/8" in diameter, included with every order, four pins per tile at no charge.


**Minimum Order**  
 Core Granule Colors & Custom Granule Colors must be ordered in 4 tile multiples; minimum order = 24 tiles

**Possible LEED v 2009 Credits**


MR Credit 4 (1-2 points)  
 MR Credit 5 (1-2 points)  
 IEQ Credit 4.3 (1 point)

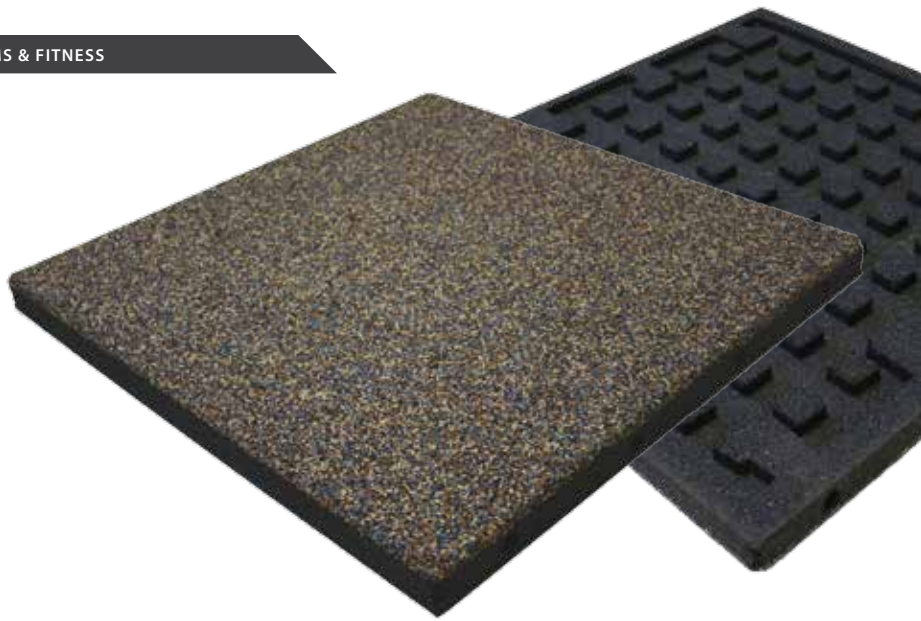

**Accessories**



**Standard Colors**

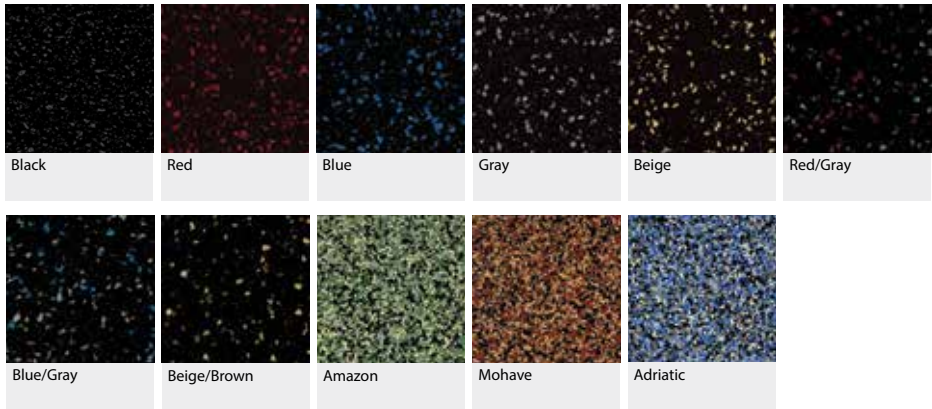

**Core Granule Colors**

Core Granule Colors available in 20%, 50% and 90% total color. One, two and three color combinations are available.



**Custom Granule Colors**

Available upon request. These color choices available in 20%, 50% and 90% speckled. Up to 5 color combinations are available.



# Activation Sport Tile

## Features

## Zones

1 2 3 4

Waffle backing for sound reduction and shock absorption  
 Unique composite structure for superior durability and wear resistance  
 Extremely durable and long lasting  
 Dowel connection system allows for free floating installation  
 No adhesive necessary  
 Great solution for extremely heavy weights  
 Ideal for 2nd floor or higher and penthouse  
 Common Uses—fitness facilities, strength training facilities

*miVantage™*  
 Ideal for  
 2nd floor or  
 higher and  
 penthouse

## Specifications

### Material

100% recycled SBR with either recycled SBR or EPDM top wear layer

### Tile Size

24" x 24"

### Weight

4.5 lbs/sq ft (18 lbs/tile)

### Total Thickness

1"

### Sound Insulation

(ASTM E492) F11C 50

### Critical Radiant Flux

(ASTM E648) Class 2: 0.22 – 0.44 w/cm<sup>2</sup>

### Additional Specs

Custom colors available. Please contact our Product Specialists for more information.

### Accessories

Dowels: each tile contains 6 dowels to secure the tile in place. Dowels are inserted into factory molded holes and the tiles are driven together using a wooden block or mallet.


### Recycled Content

Varies by color and SBR or EPDM intensity. Please contact our Product Specialists for more information.

## Possible LEED v 2009 Credits

MR Credit 4 (1-2 points)

MR Credit 5 (1-2 points)



Black 100



Gray 101



Blue 102



Blue/Gray 103



Tan 104



Sea Salt 300



Juniper 301




Bay Leaf 302




Cayenne 303




Coriander 304




Autumn 900




Slate 902



Firebrick 903




Parchment 904



Crystal 905



Pomegranate 906



Bark 907



Evergreen 908



Marine 909

# Duo Tile

**Features**      **Zones**    1   2   3   4

Premium performance sports flooring with all the benefits of modular tiles  
 Shock absorbent, spike and blade resistant  
 Even color distribution and state-of-the-art precision quality edges provide a seamless look  
 Common Uses—health clubs, weight rooms, ice arenas, ski areas, locker rooms, retail stores, anti-fatigue work stations, entrances

**Specifications**

**Material**  
 Black recycled rubber with EPDM colored granules—10% and 30% intensity

**Tile Size**  
 Square Edge Tile = 38" x 38"  
 Interlocking Tile = 37" x 37"

**Custom Sizes**  
 Consult our Product Specialists for assistance. Please specify 10% or 30% intensity.

**Thickness**  
 Square Edge Tile = 4 mm, 5 mm, 6 mm, 7 mm, 8 mm, 9 mm, 10 mm and 12 mm  
 Interlocking Tile = 8 mm, 9 mm, 10 mm and 12 mm

**Weight**  
 Varies by thickness

**Slip Resistance**  
 (ASTM D2047) 1.04 Dry and 1.05 Wet

**Chemical Resistance**  
 (ASTM F925) Excellent

**Options**  
 Reducer

**Recommended Installation**  
 Square Edge Tile = Glue down  
 Interlocking Tile = Loose lay, reversible

**Custom**  
 Colorful inlaid logos available, consult our Product Specialists for details

**Possible LEED v 2009 Credits**

- MR Credit 2 (1-2 points)
- MR Credit 4 (1-2 points)
- MR Credit 5 (1-2 points)
- IEQ Credit 4.1 (1 point)
- IEQ Credit 4.3 (1 point)



**Reversible Interlocking Edge Tiles**

For loose-lay applications. Installs quickly without adhesives or floor prep in dry areas—Weight Room & Fitness Areas


**Precision Square Edge Tiles**

For glue-down applications where water and moisture may be present—Ski Areas, Hockey Arenas, Locker Rooms





Black

**10% Intensity**    \* Minimums may apply

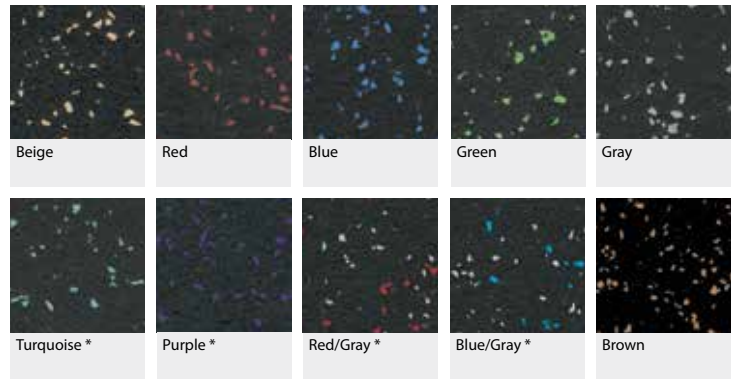


**30% Intensity**    \* Minimums may apply

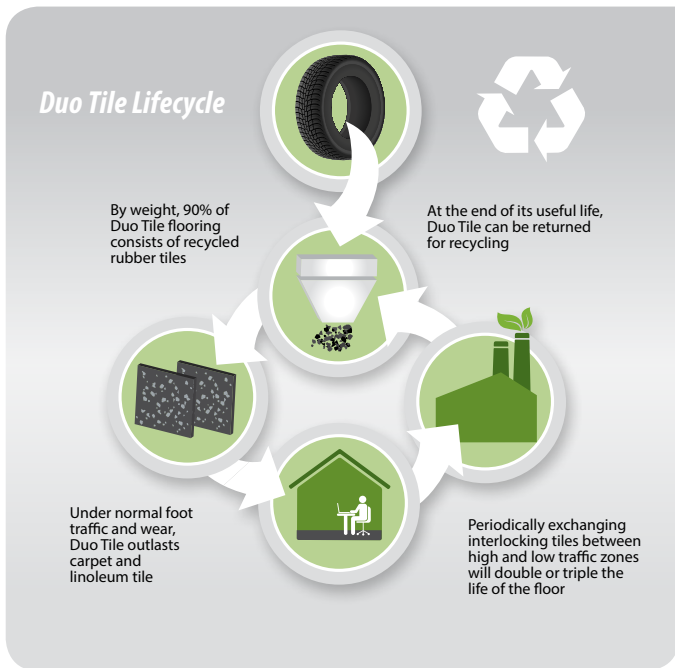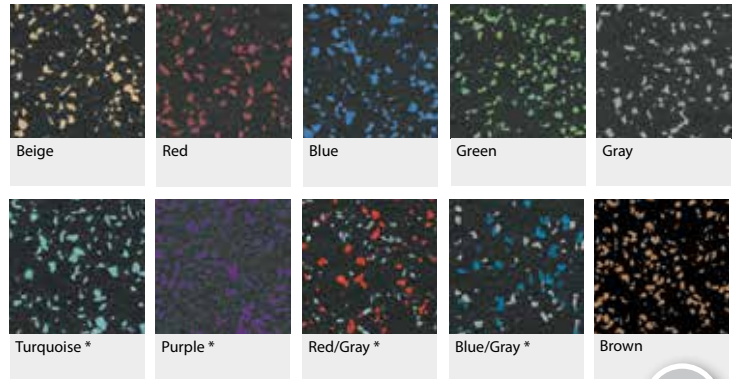


More rubber flooring color options are available.

See Page 78

# Decathlon

Features	Zones	1	2	3	4
<p>Shock absorbent, spike and blade resistant</p> <p>Non-laminated surface offers outstanding slip-resistance, even when wet</p> <p>Colored EPDM rubber granules never wear away</p> <p>Common Uses—health clubs, weight rooms, ice arenas, ski areas, retail stores, anti-fatigue work stations</p>					
<b>Specifications</b> 					
<p><b>Material</b> Black recycled rubber with EPDM colored granules</p> <p><b>Roll Size</b> 6 mm = 4' x lengths up to 1,250 lin ft 9 mm = 4' x lengths up to 800 lin ft</p> <p><b>Standard Thickness</b> 9 mm</p> <p><b>Additional Thicknesses</b> 4, 6, 8 or 12 mm</p> <p><b>Standard Weight</b> 9 mm = 2 lbs/sq ft</p> <p><b>Slip Resistance</b> (ASTM D2047) 0.90</p> <p><b>Recommended Installation</b> Glue down</p> <p><b>Recycled Content</b> Mochachino = 4.12% pre-consumer and 73% post-consumer All other colors = 2.09% pre-consumer and 81.9% post-consumer</p> <p><b>Minimum Order</b> 20 lin ft</p>					
<b>Possible LEED v 2009 Credits</b>					
<p>MR Credit 4 (1-2 points)</p> <p>MR Credit 5 (1-2 points)</p> <p>IEQ Credit 4.1 (1 point)</p>					

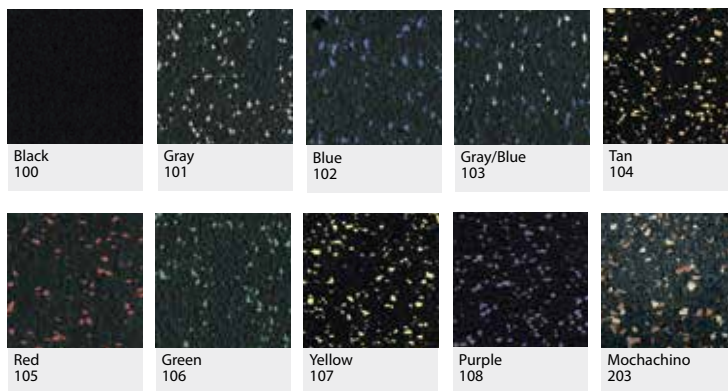


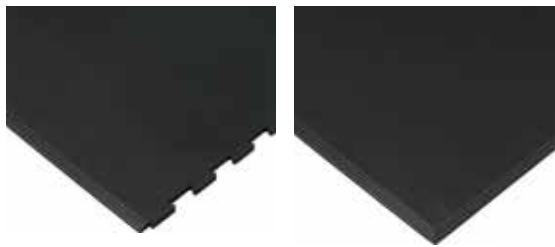
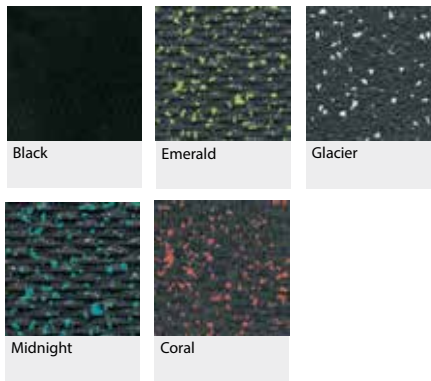
# Decathlon Design

Features	Zones	1	2	3	4
<p>Create colorful designs to accent or enhance any interior</p> <p>Customize patterns and colors</p> <p>Non-laminated surface offers outstanding slip resistance, even when wet</p> <p>Common Uses—retail stores, office and commercial buildings, schools, entrances, sports facilities</p>					
<b>Specifications</b> 					
<p><b>Material</b> Black recycled rubber with EPDM colored granules</p> <p><b>Roll Size</b> 185-580 lin ft (varies by thickness) 50 lin ft minimum</p> <p><b>Thickness</b> 9 mm</p> <p><b>Additional Thicknesses</b> * 4, 6, 8 and 12 mm</p> <p><b>Weight</b> Varies by thickness</p> <p><b>Slip Resistance</b> (ASTM D2047) 0.9 * (ASTM C1028) 0.86</p> <p><b>Chemical Resistance</b> (ASTM F925) Excellent</p> <p><b>Recommended Installation</b> Glue down</p> <p><b>Recycled Content</b> 9% pre-consumer and 56% post-consumer * 20.3% pre-consumer and 36.6% post-consumer</p>					
<b>Possible LEED v 2009 Credits</b>					
<p>MR Credit 4 (1-2 points)</p> <p>MR Credit 5 (1-2 points)</p> <p>IEQ Credit 4.1 (1 point)</p>					





# Lock Mat

Features	Zones	1	2	3	4
<p>Interlocking, heavy-duty rubber flooring installs easily without adhesives or floor prep</p> <p>Precision water-jet interlock system virtually eliminates gaps</p> <p>Non-marking, non-skid and resistant to bacteria provides extra protection over hard floors and/or carpet</p> <p>Common Uses—weight rooms, ice arenas, health clubs, locker rooms, pro shops, exercise areas, dugouts</p>					
<p><b>Specifications</b> </p> <p><b>Material</b> Recycled rubber with EPDM colored granules; 100% Black tiles contain 93% post-consumer recycled content; Color tiles contain 87% post-consumer recycled content</p> <p><b>Style</b> Interlocking edge (borders and corners also available)</p> <p><b>Tile Size</b> Centers = 46.71" x 46.71" (15.15 sq ft) Borders &amp; Corners = 23.05" x 46.71" or 46.71" x 46.71"</p> <p><b>Custom Sizes</b> Consult our Product Specialists for assistance</p> <p><b>Thickness</b> 3/8" or 1/2"</p> <p><b>Weight</b> Varies by thickness</p> <p><b>Slip Resistance</b> (ASTM C1028) 0.85 Dry and 0.95 Wet</p>					
<p><b>Possible LEED v 2009 Credits</b></p> <p>MR Credit 4 (1-2 points) MR Credit 5 (1-2 points)</p>					



# Super Sport Weight Mat

Features	Zones	1	2	3	4
<p>Heavy rubber matting protects floors and equipment from damage</p> <p>Shock absorbent and spike resistant</p> <p>Easy and economical to install, requires no adhesives, yet does not shift once installed</p> <p>Common Uses—weight rooms, ice arenas, health clubs, locker rooms, exercise areas, dugouts, live stock and agricultural settings</p>					
<p><b>Specifications</b> </p> <p><b>Material</b> Recycled rubber</p> <p><b>Style</b> Square edge</p> <p><b>Mat Size</b> 4' x 6' (may vary slightly)</p> <p><b>Thickness</b> 13 mm (1/2"), 19 mm (3/4")</p> <p><b>Weight</b> 13 mm = 70 lbs 19 mm = 100 lbs</p> <p><b>Slip Resistance</b> (ASTM C1028) 0.85 Dry and 0.95 Wet</p> <p><b>Recycled Content</b> 13 mm = 93% post-consumer 19 mm = 100% post-consumer</p>					
<p><b>Possible LEED v 2009 Credits</b></p> <p>MR Credit 4 (1-2 points) MR Credit 5 (1-2 points)</p>					



# Propel Tile™

Features	Zones	1	2	3	4
<p>Polypropylene fibers do not absorb moisture and will not emit odor</p> <p>Will not zipper like standard carpet</p> <p>Dimensionally stable; won't shrink or curl</p> <p>Common Uses—universities, multipurpose facilities, convention halls</p>					
<p><b>Specifications</b></p> <p><b>Material</b> 100% solution-dyed polypropylene with 15% post-consumer recycled content</p> <p><b>Backing</b> Bitumen</p> <p><b>Tile Size</b> 19-11/16" x 19-11/16"</p> <p><b>Thickness</b> 9/32"</p> <p><b>Weight</b> 117.97 oz/sq yd</p>					
<p><b>Possible LEED v 2009 Credits</b></p> <p>IEQ Credit 4.1 (1 point) MR Credit 4 (1-2 points)</p>					





# Contract Flooring

ZONES 1 2 3 4

*Floorworks® Planks*

# Floorworks® Planks

**Features**      **Zones**    1    2    3    4

Authentic, cutting-edge standard designs with hundreds of additional custom options available  
 Deep stocking levels to ensure availability  
 ISO 9001 certified manufacturing  
 Environmentally-sound ISO 14001 manufacturing process  
 Other optional accessories include Tacky-Back pre-applied adhesive and Underfloor MC (see page 82, 83)  
 Common Uses—restaurants, retail, multi-family properties, hotels, healthcare facilities, corporate office buildings, schools

*miVantage™  
 Highest  
 quality on the  
 market*

**Specifications** 

**Material**  
 Resilient flooring tiles made of heterogeneous vinyl with 28% pre-consumer recycled content

**Plank Sizes**  
 4" x 36", 6" x 36" or 6" x 48" (varies by style)

**Thickness**  
 3 mm


**Wear Layer**  
 0.5 mm (20 mil)

**Weight**  
 Approximately 1 lb/sq ft

**Adhesive**  
 Mats Inc. Perma-Bond or Perma-Spray 2000

**Possible LEED v 2009 Credits**

- MR Credit 4 (1-2 points)
- IEQ Credit 4.1 (1 point)
- IEQ Credit 4.2 (1 point)
- IEQ Credit 4.3 (1 point)

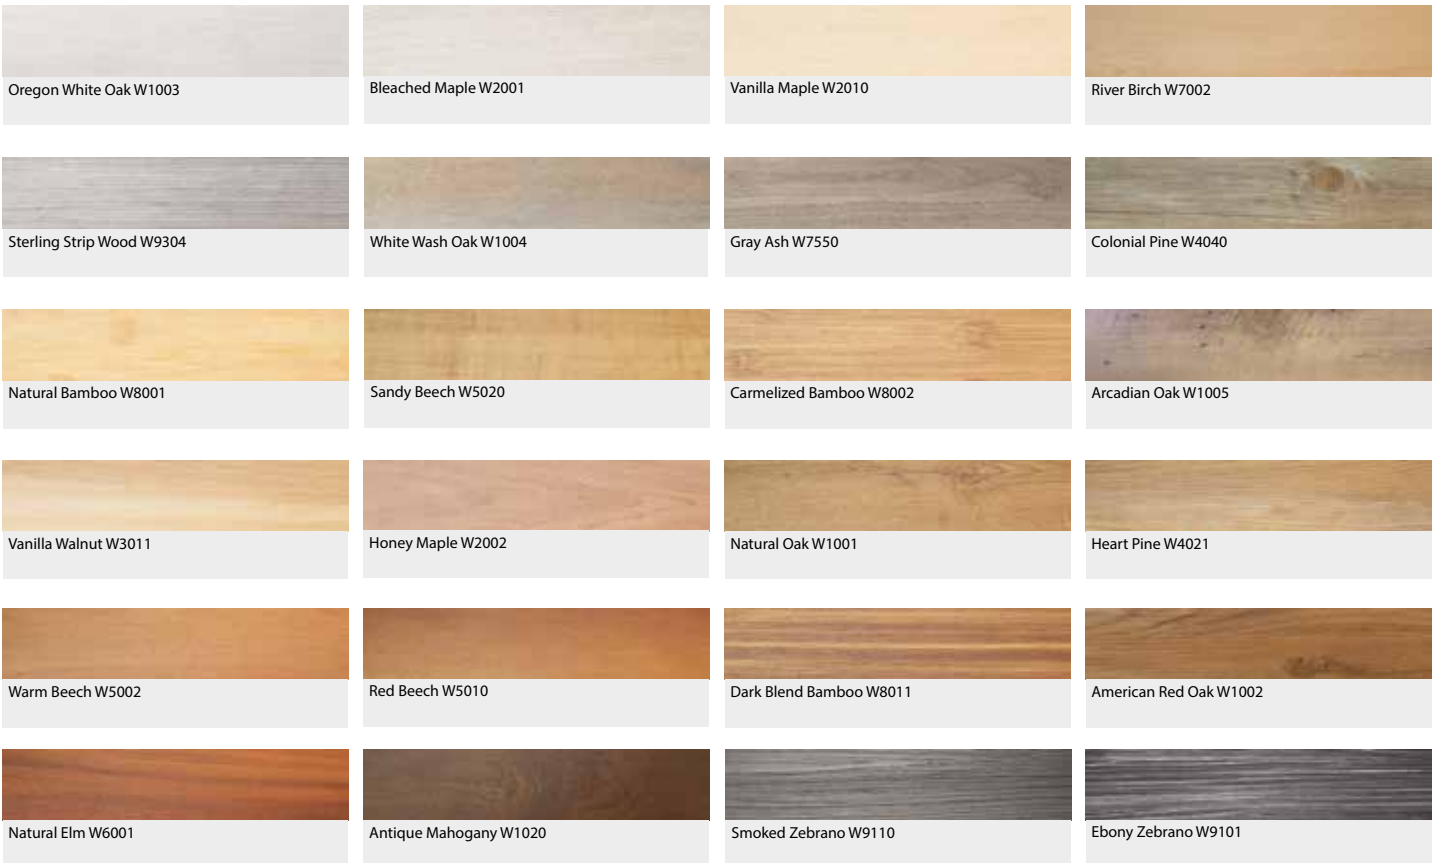




























Stunning, natural-looking wood designs and colors are further enhanced with embossed textures to accentuate the realistic appearance of highly grained patterns, distressed woods and distinctive handscraped planks.

**FLOORWORKS®**  
Distinctive, Durable, Different

 Heritage Maple W2003	 Sapwood Cherry W6505	 Brazilian Cherry W6501	 Nutmeg Hickory W1033
 Heartwood Cherry W6502	 Blended Strip Wood W9300	 Burnished Oak W1011	 Natural Zebrano W9100
 Cajun Pine W4030	 Antique Pine W9010	 Brazilian Parquet Trend W9201	 Natural Walnut W3001
 Cherry Walnut W3010	 California Black Oak W1012	 Tudor Distressed Wood W1053	 Tuscan Distressed Wood W1051
 Sedona Distressed Wood W1050	 Island Distressed Wood W1052	 Silver Birch W7003	 Gunsmoke Oak W1010
 Antique Zebra Wood W9001	 Buckeye Hickory W1035	 Shellbark Hickory W1036	

# Floorworks® Tiles

**Features**      **Zones**    1   2   3   4

Authentic, cutting-edge standard designs with hundreds of additional custom options available  
 Deep stocking levels to ensure availability  
 ISO 9001 certified manufacturing  
 Environmentally-sound ISO 14001 manufacturing process  
 Other optional accessories include Tacky-Back pre-applied adhesive and Underfloor MC (see page 82, 83)  
 Common Uses—restaurants, retail, multi-family properties, hotels, healthcare facilities, corporate office buildings, schools

*miVantage™*  
 Highest  
 quality on the  
 market

**Specifications** 

**Material**  
 Resilient flooring tiles made of heterogeneous vinyl with 28% pre-consumer recycled content

**Tile Sizes**  
 12" x 18", 18" x 18" or 12" x 24" (varies by style)

**Thickness**  
 3 mm

**Wear Layer**  
 0.5 mm (20 mil)

**Weight**  
 Approximately 1 lb/sq ft

**Adhesive**  
 Mats Inc. Perma-Bond or Perma-Spray 2000

**Possible LEED v 2009 Credits**

- MR Credit 4 (1-2 points)
- IEQ Credit 4.1 (1 point)
- IEQ Credit 4.2 (1 point)
- IEQ Credit 4.3 (1 point)



Linen Sand T910	Linen Sage T911	Linen Umber T914	Linen Raven T913	Alaskan Slate T204	Coastal Slate T210	Quarry Slate T216	Indian Slate T211	Hearthstone Slate T215
Stratum Whey T620	Stratum Pewter T621	Stratum Bark T622	Stratum Ink T623	Mountain Slate T203	Copper Slate T217	African Slate T202	Urban Bronze T330	Canyon Slate T218
Santa Fe Eggshell T601	Santa Fe Dusk T603	Santa Fe Mink T602	Santa Fe Sable T604	Overcast T303	Cement T310	Sandstorm T321	Smokey T301	Asphalt T311
Toffee Sandstone T401	Dusk Sand T102	Midnight Sand T103	Travertine Gold T501	Travertine Mist T502	Stained Concrete Metro T252	Stained Concrete Muse T251	Stained Concrete Vogue T250	Deckplate Charcoal T921

# Floorworks® Charlestown™ Collection

Thickness  
2.5 mm  
Wear Layer  
0.3 mm

**Features**      **Zones**   1   2   3   4

Authentic, cutting-edge standard designs with hundreds of additional custom options available  
 Deep stocking levels to ensure availability  
 ISO 9001 certified manufacturing  
 Environmentally-sound ISO 14001 manufacturing process  
 Other optional accessories include Tacky-Back pre-applied adhesive and Underfloor MC (see page 86, 85)  
 Common Uses—restaurants, retail, multi-family properties, hotels, healthcare facilities, corporate office buildings, schools

**Specifications** 

**Material**  
Resilient flooring tiles made of heterogeneous vinyl with 28% pre-consumer recycled content

**Tile Sizes**  
12" x 18", 18" x 18" or 12" x 24" (varies by style)

**Thickness**  
2.5 mm  
2 mm also available

**Wear Layer**  
0.3 mm (12 mil)

**Weight**  
Approximately 1 lb/sq ft


**Adhesive**  
Mats Inc. Perma-Bond or Perma-Spray 2000

**Custom**  
Custom colors options available

**Possible LEED v 2009 Credits**













MR Credit 4 (1-2 points)  
 IEQ Credit 4.1 (1 point)  
 IEQ Credit 4.2 (1 point)  
 IEQ Credit 4.3 (1 point)

The Floorworks® Charlestown™ Collection has been produced to provide you with immediate access to the highest-quality resilient planks and tiles for light commercial applications.



**FLOORWORKS®**  
Distinctive, Durable, Different

## Floorworks® Planks

 Vanilla Maple W2010	 Natural Bamboo W8001	 Heritage Maple W2003	 Sandy Beech W5020
 Gray Ash W7550	 Colonial Pine W4040	 Dark Blend Bamboo W8011	 Natural Walnut W3001
 Cherry Walnut W3010	 Gunsmoke Oak W1010	 Brazilian Parquet Trend W9201	 Heartwood Cherry W6502

## Floorworks® Tiles

 Travertine Mist T502	 Santa Fe Eggshell T601	 Travertine Gold T501	 Quarry Slate T216	 Copper Slate T217	 Canyon Slate T218
---	---	---	--	--	---

# PURline

**Features**

**Zones**

- 1
- 2
- 3
- 4

Hygienic nonporous material with a tenaciously wear resistant surface  
 Simple maintenance requirements that does not include finishing, waxing, buffing or stripping  
 Produced with 90% renewable & natural raw materials, PURline is GreenGuard Gold certified  
 Common Uses—corporate offices, daycare centers, educational facilities, hospitals, hotels, medical offices, retail

**Specifications**

**Material**  
 Heterogeneous commercial botanol floor covering consisting of bio-polyurethane, glass fiber reinforcement, paper print layer, and PU top coat

**Weight**  
 0.74 lbs/sq ft

**Thickness**  
 2.5 mm

**Sizes**  
 6' x 7" x 65' x 7"


**Possible LEED v 2009 Credits**

- IEQ Credit 4.1 (1 point)
- IEQ Credit 4.3 (1 point)
- MR Credit 6



*miVantage™  
 PURline  
 organic  
 flooring that  
 will sustain  
 the most  
 demanding  
 commercial  
 applications*


Plank & Tile  
 Collection also  
 available



Muslin



Pewter




Honey



Pumpkin



Eucalyptus




Sky




Kiwi




Sand



Silver



Tangelo




Berry



Rainforest




Lagoon




Melange



Steel




Apricot



Ruby



Peacock



Navy




Cappuccino



Midnight



Terracotta



Lavender



Hyacinth



Indigo

**Designed by Nature. Refined by Science. Flooring Reinvented.**


Botanol is an entirely new class of flooring produced from natural raw materials.

PURLINE botanol is formulated with canola oil harvested from rappa seed, castor oil harvested from castor seed and chalk.

The ingredients are molecularly transformed to create extremely dense polyurethane and a tenaciously durable, nonporous floor covering.



**CANOLA OIL**  
from rappa seed

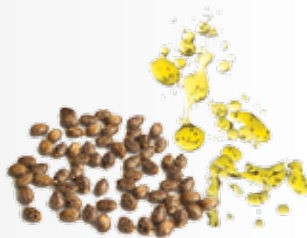



**CASTOR OIL**  
from castor seed



**CHALK**



TOTAL HEIGHT 2.5 mm

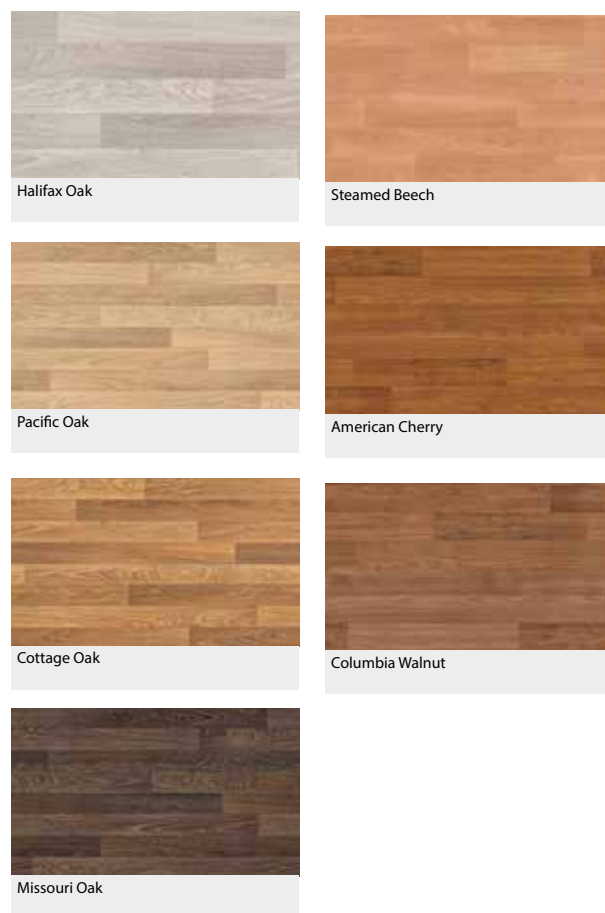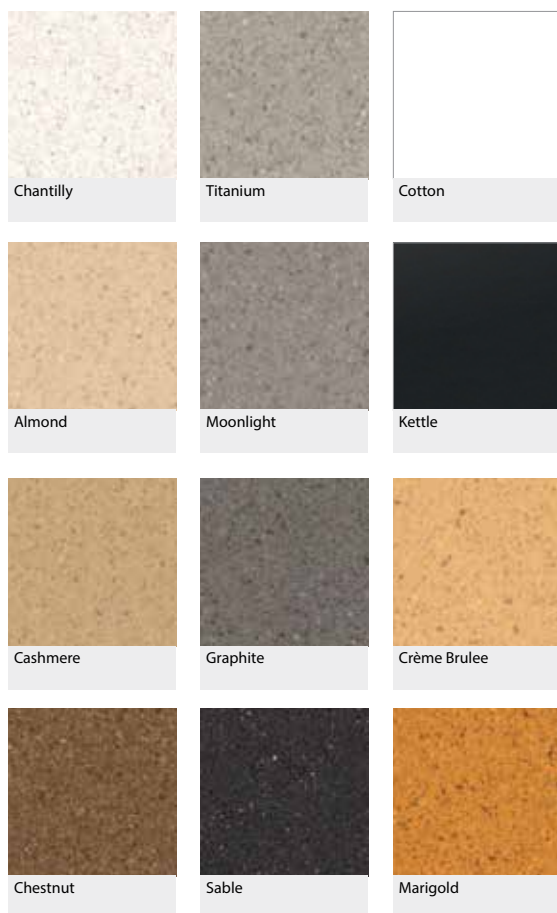

# Debolon Compact

Features	Zones
<p>FloorScore® Certified</p> <p>Never needs waxing, stripping or buffing</p> <p>Extreme durability (1500 psi)</p> <p>Superior dimensional stability</p> <p>Increased durability due to 0.7 mm wear layer</p> <p>Ideal for heavy traffic areas</p> <p>Manufactured using domestic sugar beets (citric acid esters) as a natural, sustainable softener replacement to phthalates as plasticizers</p> <p>Common Uses—hospitals, medical offices, corporate offices, educational facilities</p>	<p>1 2 3 4</p>
<p><b>Specifications</b> </p>	
<p><b>Material</b></p> <p>Fully recyclable heterogeneous floor covering with glass fiber reinforcement. Traffic-rated for heavy commercial/ light industrial use with a proprietary UV-cured PUR top surface.</p> <p><b>Surface</b></p> <p>XPS Satin Finish</p> <p><b>Roll Size</b></p> <p>6' 7" x 65' 7"</p> <p><b>Thickness</b></p> <p>2 mm</p> <p><b>Weight</b></p> <p>0.55 lb/sq ft</p>	<p><b>Residual Indentation</b> (EN 433) &lt; 0.1 mm</p> <p><b>Static Load Limit</b> (ASTM F970) 1500 psi</p> <p><b>Sound Reduction</b> (ISO 140-8) Lw = 4 dB</p> <p><b>Critical Radiant Flux</b> (ASTM E648) Class 1</p> <p><b>Seaming Options</b></p> <p>Heat weld with Debolon Weld Rod, chemical weld with Mats Inc. Cold Weld</p> <p><b>Adhesive</b></p> <p>Mats Inc. Perma-Bond Adhesive</p> <p><b>Rapidly Renewable Content</b></p> <p>10%</p>
<p><b>Possible LEED v 2009 Credits</b></p> <p>MR Credit 4 (1-2 points)</p> <p>MR Credit 6 (1 point)</p> <p>IEQ Credit 4.1 (1 point)</p> <p>IEQ Credit 4.3 (1 point)</p>	



# Debolon Comfort

## Features

FloorScore® Certified  
 Never needs waxing, stripping or buffing  
 Highly sound absorbent (18 dB)  
 Ideal for healthcare and retail new construction and renovation  
 Carpet feel underfoot and the industry's thickest wear layer (0.8 mm)  
 Manufactured using domestic sugar beets (citric acid esters) as a natural, sustainable softener replacement to phthalates as plasticizers  
 Common Uses—hospitals, medical offices, corporate offices, educational facilities, daycare centers, retail

## Zones

1 2 3 4

*miVantage™*  
 Authentic wood look with easy maintenance

## Specifications

### Material

Fully recyclable floor heterogeneous floor covering with glass fiber reinforcement. Traffic-rated for heavy commercial/light industrial use with a proprietary UV-cured PUR top surface.

### Surface

XPS Satin Finish

### Roll Size

6' 7" x 65' 7"

### Thickness

3.3 mm

### Weight

0.58 lb/sq ft

### Residual Indentation

(EN 433) < 0.2 mm

### Static Load Limit

(ASTM F970) 200 psi

### Sound Reduction

(ISO 140-8) Lw = 18 dB

### Critical Radiant Flux

(ASTM E648) Class 1

### Recommended Installation

Glue down sheets

### Seaming Options

Heat weld with Debolon Weld Rod, chemical weld with Mats Inc. Cold Weld

### Adhesive


Mats Inc. Perma-Bond Adhesive

### Rapidly Renewable Content

10%



## Possible LEED v 2009 Credits

MR Credit 4 (1-2 points)  
 MR Credit 6 (1 point)  
 IEQ Credit 4.1 (1 point)  
 IEQ Credit 4.3 (1 point)

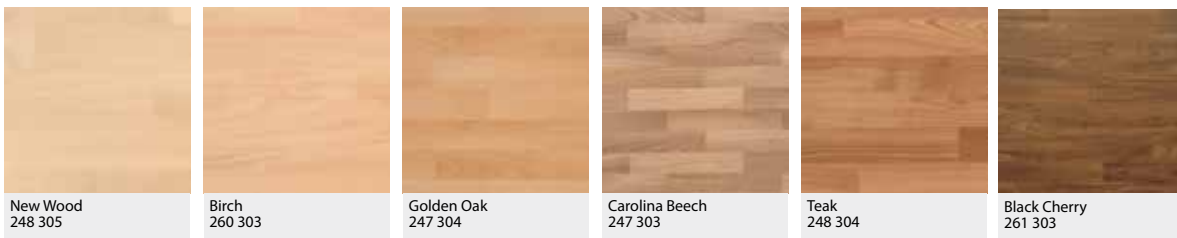

See Page 75



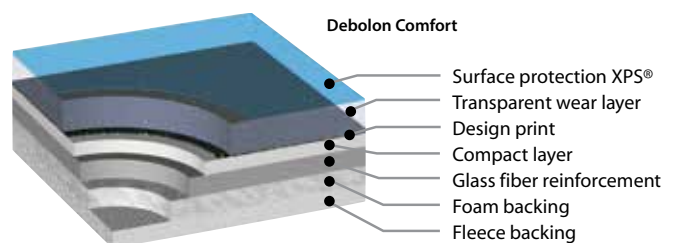
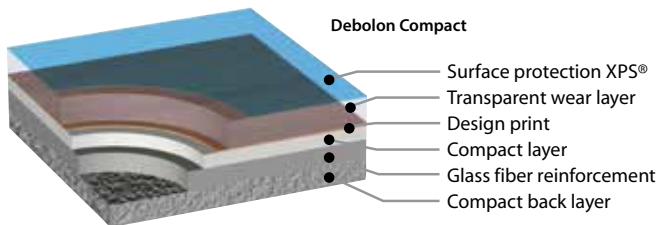












Available in a wide variety of matte finished colors.



# Debolon Comfort Spezial

Features	Zones	1	2	3	4
<p>FloorScore® Certified                      Never needs waxing, stripping or buffing                      Ideal for healthcare and retail new construction and renovation                      Carpet feel underfoot                      Manufactured using domestic sugar beets (citric acid esters) as a natural, sustainable softener replacement to phthalates as plasticizers                      Common Uses—hospitals, medical offices, corporate offices, educational facilities, daycare centers, retail</p>					
<p><b>Specifications</b> </p>					
<p><b>Material</b>                      Fully recyclable heterogeneous floor covering with glass fiber reinforcement. Traffic-rated for heavy commercial/ light industrial use with a proprietary UV-cured PUR top surface.</p>		<p><b>Residual Indentation</b>                      (EN 433) <math>\leq 0.2</math> mm  <b>Static Load Limit</b>                      (ASTM F970) 200 psi  <b>Sound Reduction</b>                      (ISO 140-8) Lw = 15 dB  <b>Critical Radiant Flux</b>                      (ASTM E648) Class 1</p>			
<p><b>Surface</b>                      XPS Satin Finish</p>		<p><b>Recommended Installation</b>                      Glue down sheets</p>			
<p><b>Roll Size</b>                      6' 7" x 82'</p>		<p><b>Seaming Options</b>                      Heat weld with Debolon Weld Rod, chemical weld with Mats Inc. Cold Weld</p>			
<p><b>Thickness</b>                      2.6 mm</p>		<p><b>Adhesive</b>                      Mats Inc. Perma-Bond Adhesive</p>			
<p><b>Weight</b>                      0.48 lb/sq ft</p>		<p><b>Rapidly Renewable Content</b>                      10%</p>			
<p><b>Possible LEED v 2009 Credits</b></p>					
<p>MR Credit 4 (1-2 points)                      MR Credit 6 (1 point)                      IEQ Credit 4.1 (1 point)                      IEQ Credit 4.3 (1 point)</p>					

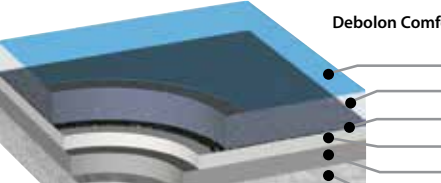

						
Pomegranate 250 323	Persimmon 250 322	Guava 250 321	Grapefruit 250 320	Avocado 250 326	Kiwi 250 327	
						
Acai 250 324	Morinda 250 325	Raisin 250 316	Blackberry 250 317	Currant 250 318	Chestnut 250 328	Almond 250 319
<p><b>Debolon Comfort Spezial</b></p>  <ul style="list-style-type: none"> <li>Surface protection XPS®</li> <li>Transparent wear layer</li> <li>Design print</li> <li>Compact layer</li> <li>Glass fiber reinforcement</li> <li>Foam backing</li> <li>Fleece backing</li> </ul>						
						
			Azure Stripwood 268 405	Hazel Stripwood 268 404		



# Debolon Rx™

Features	Zones	1	2	3	4
----------	-------	---	---	---	---

FloorScore® Certified  
 Resilient flooring specifically designed for our aging population  
 Visually pleasing and comforting patterns  
 Warm color tones and complementary designs that are meant to work together  
 Manufactured using domestic sugar beets (citric acid esters) as a natural, sustainable softener replacement to phthalates as plasticizers  
 Common Uses—senior living facilities, hospitals, medical centers

*miVantage™  
 Matte finish  
 flooring for  
 glare-free  
 design*

## Specifications

<b>Material</b> Fully recyclable heterogeneous resilient floor covering with glass fiber reinforcement. Traffic-rated for heavy commercial/light industrial use with a proprietary UV-cured PUR top surface.	<b>Static Load (ASTM F970)</b> Comfort Rx = 200 psi Compact Rx = 1500 psi
<b>Surface</b> XPM Non-Glare Matte Finish	<b>Residual Indentation (EN 433)</b> Comfort Rx = ≤ 0.2 mm Compact Rx = ≤ 0.1 mm
<b>Roll Size</b> 6' 7" x 65' 7"	<b>Sound Reduction (ISO 140-8)</b> Comfort Rx = 18 dB Compact Rx = 4 dB
<b>Thickness</b> Comfort Rx = 3.3 mm Compact Rx = 2 mm	<b>Critical Radiant Flux (ASTM E648) Class 1</b>
<b>Weight</b> Comfort Rx = 0.58 lb/sq ft Compact Rx = 0.55 lb/sq ft	<b>Recommended Installation</b> Glue down sheets
	<b>Seaming Options</b> Heat weld with Debolon Weld Rod, chemical weld with Mats Inc. Cold Weld
	<b>Adhesive</b> Mats Inc. Perma-Bond Adhesive
	<b>Rapidly Renewable Content</b> 10%



## Possible LEED v 2009 Credits

- MR Credit 4 (1-2 points)
- MR Credit 6 (1 point)
- IEQ Credit 4.1 (1 point)
- IEQ Credit 4.3 (1 point)

Comfort	648 306	647 304	668 401	668 402	648 304	661 303	661 304	669 401
Compact	748 306	747 304	768 401	768 402	748 304	761 303	761 304	769 401
Comfort	669 402	667 309	667 308	667 307	667 306	667 305	667 304	667 303
Compact	769 402	767 309	767 308	767 307	767 306	767 305	767 304	767 303
Comfort	667 302	667 301	667 310	600 009	600 010	600 011	600 012	
Compact	767 302	767 301	767 310	700 009	700 010	700 011	700 012	

# Floorazzo™

**Features**      **Zones**    1    2    3    4

Extremely durable to withstand heavy foot traffic, tables, and carts  
 Stain-resistant and easy to clean  
 Significantly reduces maintenance and repair expense  
 Unlimited custom color possibilities  
 Common Uses—airport terminals, banks, bus terminals, corporate office buildings, department stores, education facilities, government buildings, healthcare facilities, hospitality environments, municipal buildings, retail stores

*miVantage™  
 Outlasts and outperforms nearly all other types of flooring*

**Specifications**

**Material**  
 Homogeneous resilient terrazzo flooring tile with 18% pre-consumer (Gem & Marble) and 18% post-consumer (Gem) recycled content

**Tile Size**  
 2' x 2' and optional 2' x 4' FUSION System™ panels

**Thickness**  
 3/16"

**Weight**  
 2.15 lbs/sq ft

**Static Coefficient of Friction**  
 (ASTM C1028) 0.66 Dry and 0.7 Wet

**Critical Radiant Flux**  
 (ASTM E648) Class 1

**Static Load Limit**  
 (ASTM F970) 1000 psi

**Residual Indentation**  
 (EN 433) < 0.2 mm

**Adhesive**  
 Mats Inc. Perma-Bond

**Seaming Options**  
 Butt Joint, FUSION™

**Possible LEED v 2009 Credits**

MR Credit 4 (1-2 points)  
 MR Credit 5 (1-2 points)  
 IEQ Credit 4.3 (1 point)



floorazzo   
 by matsinc.

U.S. Patent No. 8,033,079

## Floorazzo™ Gem



# Floorazzo™ & FUSION System™

The patent pending FUSION System™ molecularly bonds Floorazzo™ tile seams to create a truly monolithic floor. FUSION System™ provides a seamless, bead- and crevice-free installation, unique only to Floorazzo™.

The Floorazzo™ & FUSION System™ is a hygienic flooring solution with long-lasting natural beauty. Because it is both durable and extremely easy to maintain, it is a practical solution for environments where controlling contamination is a priority or where monolithic flooring is desired.



Base



Sanitary Cove Base



Inside Edge



Outside Edge

## Floorazzo™ Marble



# Panorama Tile

**Features**

Uniform color and non-laminated surfaces provide lasting wear qualities  
 Sustainable and environmentally-friendly  
 Durable, resilient and resistant to scuffs, scratches and indentations  
 Easy to install and maintain  
 Common Uses—retail, corporate offices, hotels, lobbies, cafes, fitness centers

**Specifications**

**Material**  
 Recycled black rubber with EPDM colored granules. Recycled content varies by color (Pre-consumer range 6.1% - 18.1%; Post-consumer range 0% - 58.4%)

**Style**  
 Square Edge or Interlocking Tile

**Sizes**  
 Square Edge Tile: 38" x 38"  
 Interlocking Tile: 37" x 37"

**Thicknesses**  
 Square Edge Tile: 4 mm, 5 mm, 6 mm, 7 mm, 8 mm, 9 mm, 10 mm, 12 mm  
 Interlocking Tile: 8 mm, 9 mm, 10 mm, 12 mm

**Weight**  
 Varies by thickness

**Slip Coefficient of Friction (ASTM D2047)**  
 Up to 50% color: Dry 1.04 or Wet 1.05;  
 Over 50% color: Dry 0.85 or Wet 1.01

**Recommended Installation**  
 4 mm tiles must be glued down, we strongly recommend a glue down installation for tile thickness up to 7 mm  
 8 mm tile thickness and above can be loose laid

**Possible LEED v 2009 Credits**

- MR Credit 2 (1-2 points)
- MR Credit 4 (1-2 points)
- MR Credit 5 (1-2 points)
- IEQ Credit 4.1 (1 point)
- IEQ Credit 4.3 (1 point)

*miVantage™*  
 The versatility, comfort and style of carpet with the wear performance, non-allergenic properties and easy-to-clean features of resilient flooring




**Fresh Fig**



**Great Horned Owl**



**Winter Forest**

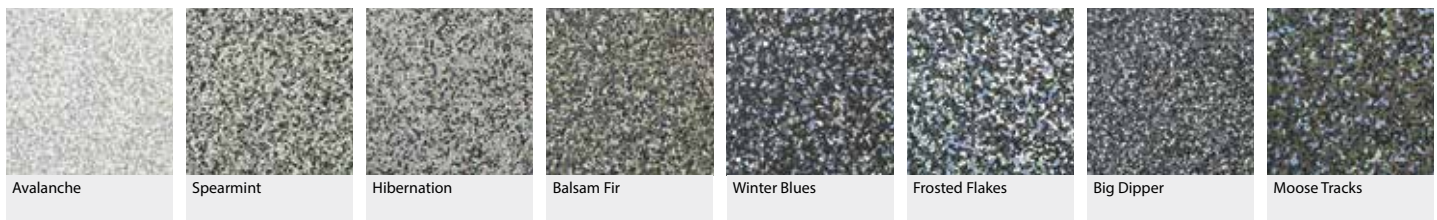




**Color inspired by the world of natural wonder that surrounds us.**


Working with some of the most renowned interior designers, Mats Inc. created the Panorama Living Color rubber flooring collection to meet the color and style demands of today's commercial interiors.

Fashionable flooring that combines design and quality, Panorama Living Color easily creates a mood and an impression while meeting the durability requirements of the most demanding environments in corporate, education, healthcare, hospitality, retail and more.


Inspiration is everywhere — in a valley, in a forest, in a meadow or at the beach, we just open our eyes and take it all in. This is what has inspired our new flooring collection. Welcome to Panorama Living Color.

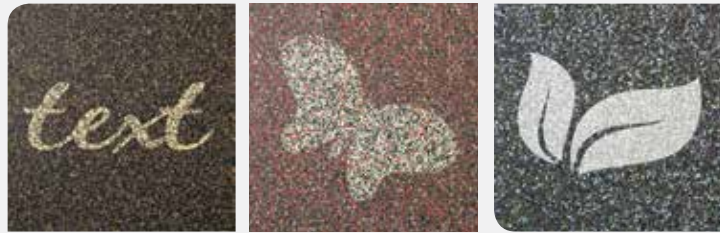

Logos

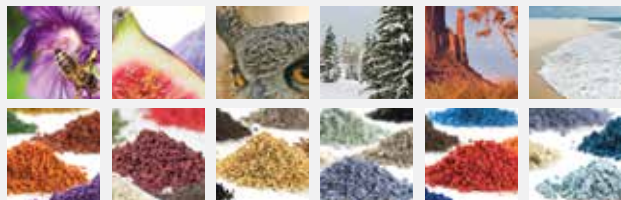

**Sandy Beach**

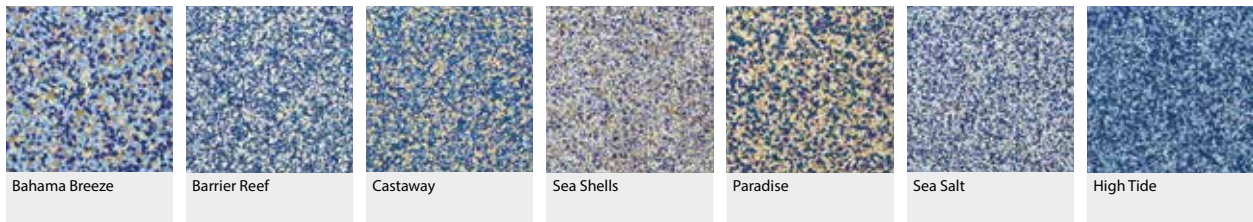

**Spring Meadow**




**Monument Valley**





# Panorama Custom



Your Custom Color



## It's as easy as 1-2-3!

Creating a unique design is simple.



## Design Your Own Floor Online

Experiment with color using our online interactive floor designer program Mixology® at [www.matsinc.com](http://www.matsinc.com)



# Trilogy Tile™

## Features

## Zones

1 2 3 4

Aggressive scraping cleans footwear to reduce the risk of slips and falls  
 Durable product ideal for commercial applications  
 High-end carpet-like appearance creates great first impression  
 Meets indoor air quality testing protocols  
 Class 1 fire rating  
 Common Uses—corporate, educational, retail, hospitality environments

*miVantage™  
 Class 1 carpet  
 tile with  
 random  
 pattern design*

## Specifications

### Material

Nylon fiber (6) textured tufted loop

### Backing

100% post-consumer recycled PET and Bitumen with 10% post-industrial recycled content

### Tile Size

19-11/16" x 19-11/16"

### Case Pack

20 tiles/case (53.8 sq ft)—full cases only

### Weight

139 oz/sq yd

### Thickness

9/32"

### Adhesive

Mats Inc. Release-Bond Adhesive



## Possible LEED v 2009 Credits

MR Credit 2 (1-2 points)  
 MR Credit 4 (1-2 points)  
 IEQ Credit 4.1 (1 point)  
 IEQ Credit 4.3 (1 point)



Oyster



Truffles




Portabello



# Journey Tile™




Features	Zones
<p><b>Bold regency stripe design for stylish interiors</b>                      Dual fiber construction scrapes off dirt and absorbs moisture                      Class 1 fire rating                      Endless installation pattern options                      Developed for medium to heavy traffic commercial applications                      Common Uses—corporate, educational, retail, hospitality environments</p>	<p>1 2 3 4</p>
<p><b>Specifications</b> </p> <p><b>Material</b> Nylon fiber (6) textured tufted loop</p> <p><b>Backing</b> Vinyl composite material reinforced with fiberglass</p> <p><b>Tile Size</b> 24" x 24"</p> <p><b>Case Pack</b> 18 tiles/case (72 sq ft)—full cases only</p> <p><b>Weight</b> 157 oz/sq yd</p> <p><b>Thickness</b> 5/16"</p> <p><b>Adhesive</b> Mats Inc. Release-Bond Adhesive</p>	
<p><b>Possible LEED v 2009 Credits</b></p> <p>IEQ Credit 4.1 (1 point)                      MR Credit 4 (1-2 points)                      MR Credit 5 (1-2 points)</p>	


*miVantage™*  
 Highly durable  
 Class 1  
 tile with  
 contemporary  
 design



Acadia Blue



Denali Gray



Galapagos Green



Sahara Brown



Quarter Turn



Staggered Quarter Turn



Ashlar



# Propel Tile™

Features	Zones
	1 2 3 4

Polypropylene fibers will not zipper like standard carpet  
 Dimensionally stable; won't shrink or curl  
 Class 1 fire rating  
 Common Uses—corporate, educational, hospitality, retail

### Specifications

**Material**  
 100% solution-dyed polypropylene with 15% post-consumer recycled content

**Backing**  
 Bitumen

**Tile Size**  
 19-11/16" x 19-11/16"

**Thickness**  
 9/32"

**Weight**  
 117.97 oz/sq yd

### Possible LEED v 2009 Credits


IEQ Credit 4.1 (1 point)  
 MR Credit 4 (1-2 points)



# Accessories



Aluminum Framing



Nosing, Transitions & Levelers



Cleaners & Sealers




# Cleaners & Sealers


Cleaners					
PRODUCT	USAGE	SIZE	COVERAGE (Approximate)	ITEM#	
MultiLino™ Care - Gymcare	Post-installation treatment for MultiLino™	10 liters (2.64 gallons)	7,500 - 10,000 sq ft	DWCARE GYM	
MultiLino™ Care - Remover	Cleaner for heavily soiled MultiLino™	10 liters (2.64 gallons)	7,500 - 10,000 sq ft	DWCARE REMOV	
JohnsonDiversey STRIDE Neutral Cleaner Citrus Scent (Green Seal™ Certified)	Recommended for regular cleaning of Duo Tile, Panorama Rubber, Woodflex™ and Gameflex®	1 gallon	Coverage varies	MSSTRID 1	
		5 gallons	Coverage varies	MSSTRID 5	
MI Cleaner	Cleaner for Debolon, Floorworks® and Woodflex™	5 liter (1.32 gallons)	52,000 sq ft	MSCLEAN 5L	
MI Deep Clean Stripper	Deep cleaning for Debolon, Floorworks® and Woodflex™	5 liter (1.32 gallons)	1,000 - 1,184 sq ft	MSDEEP 5L	

# Underlayment

PRODUCT	DESCRIPTION	ROLL SIZE	THICKNESS	WEIGHT (lbs/sq ft)	SOUND ABSORPTION	ITEM#
Underfloor SL	Specially coated fiberglass reinforced PVC underlayment for installation over existing floors or to create a floating floor over sub-floors with moisture challenges.	4' 9" x 82"	1.4 mm	0.33	Testing in process at time of print. See website.	UF4
Underfloor MC	Specially coated fiberglass reinforced PVC underlayment for installation over existing floors or to create a floating floor over sub-floors with moisture challenges.	4' 9" x 82"	4 mm	0.37	19 dB	UF40
Underfloor QC	PVC underlayment for sound absorption.	6' 7" x 68' 8"	4 mm	0.45	16 dB	QC6



Underfloor SL




Underfloor MC




Underfloor QC

## Underfloor SL

Features	Zones
Specially coated fiberglass reinforced PVC underlayment for installation over existing floors or to create a floating floor over sub-floors with moisture challenges.	1 2 3 4
Specifications 	
<b>Roll Size</b> 4' 9" x 82"	
<b>Thickness</b> 1.4 mm	
<b>Weight</b> 0.33 lbs/sq ft	
<b>Sound Absorption</b> Testing in process at time of print. See website.	
<b>Item #</b> UF4	
Possible LEED v 2009 Credits	
MR Credit 4 (1-2 points)	

## Underfloor MC

Features	Zones
Specially coated fiberglass reinforced PVC underlayment for installation over existing floors or to create a floating floor over sub-floors with moisture challenges.	1 2 3 4
Specifications 	
<b>Roll Size</b> 4' 9" x 82"	
<b>Thickness</b> 4 mm	
<b>Weight</b> 0.37 lbs/sq ft	
<b>Sound Absorption</b> 19 dB	
<b>Item #</b> UF40	
Possible LEED v 2009 Credits	
MR Credit 4 (1-2 points)	

# Adhesives

Mats Inc. offers a complete line of high-quality adhesives designed to make installation of our products trouble-free. Select the appropriate adhesive for our Roll Goods, Modular Tiles and Sports Flooring products from the chart below. Adhesive recommendations may also be found in the Specifications section for each product in this catalog. Please note actual coverage may vary depending on substrate. For assistance, or more detailed installation instructions, please contact our Product Specialists.

PRODUCT	USAGE	SIZE	COVERAGE (Approximate)	ITEM#
All-Weather Solvent-Free Adhesive	Exterior use. Rubber-backed and latex-backed matting products	1 gallon	75-100 sq ft	MSH0241
		4 gallon	360-400 sq ft	MSH0244
Cold Weld Adhesive	Seaming vinyl contract flooring for glue down installations	4.5 oz	200 lin ft	MSCOLDWELD45
MI MultiLino™ Adhesive	MultiLino™, MultiLino™ Pro, MultiLino™ WDK	10 gallon	376 sq ft	DWDDWT 10
MI MultiLino™ FM Adhesive	MultiLino™ FM	10 gallon	115 sq ft	DWDDL 10
MI Multi-Bond Carpet Mat Adhesive	All rubber- and latex-backed matting	1 gallon	110-125 sq ft	MSMULT1
		4 gallon	440-500 sq ft	MSMULT4
MI Perma-Bond Adhesive <i>Do not use for other roll and tile goods except the ones listed</i>	Debolon Compact, Debolon Compact Rx™	1 gallon	220-260 sq ft	MSPERMA 1
	Floorworks® Planks and Tiles		160-260 sq ft	
	Debolon Comfort, Debolon Comfort Rx™ and Woodflex™/Gameflex®		160-180 sq ft	
	Rubber-backed tiles		108-126 sq ft	
	Floorazzo™		160-200 sq ft	
		4 gallon	Coverage varies	MSPERMA 4
MI Release-Bond Modular Tile Adhesive	All modular mat tiles with Bitumen backing	1 gallon	220-260 sq ft	MSTILE1
	Chicago Collection™		160-180 sq ft	
		4 gallon	Coverage varies	MSTILE4
Urethane Bond Rubber Flooring Adhesive	Permanent installations of solid rubber and rubber-backed sports flooring, rubber-backed contract floor covering and Tire Tile	2 gallon	120-160 sq ft	MSCX941 2
		5 gallon	300-400 sq ft	MSCX941 5
Vinyl Cement	Edging and seaming, vinyl nosing	1 pint	Coverage varies	MSCEM PT
		1 quart	Coverage varies	MSCEM QT
MI Perma-Spray 2000	Spray adhesive for Floorworks® Planks and Tiles, Bitumen backed modular tiles	22 oz can 6 cans per case Full cases only	160-190 sq ft	MSSPRAY 2000
Ultrabond G21	SureTac™ Premium Vinyl backed goods	2 gallon	370-490 sq ft	MSG21 2PT
	Spectation™		300 sq ft	
	Ovation		200-250 sq ft	
Tacky-Back	Solvent-free, acrylic dispersion adhesive backing pre-applied to flooring for quick and easy installation on sub-floors with moisture concerns	7/8" width x 10' length Thickness: 0.13 mm		MGBOND TAPE

# Tapes

PRODUCT	TYPE	SIZE	ITEM#
Contact Tape	Permanent installations of transition strips or matting over hard surfaces. Will not leave residue.	1" x 164' Roll (Narrowest)	MSTAC1
		2" x 164' Roll (Narrow)	MSTAC2
		3.4" x 165' Roll (Wide)	MSCONT3
Success Tape	Adhering rubber- and vinyl-backed matting to carpet or hard surfaces. Will not leave residue.	39" x 82' Roll (Extra Wide)	MSDUO39
Velcro	Adhering rubber- and vinyl-backed matting to carpet	1" x 75' (Loose to 75')	MSVELCR
3M™ Stay-in-Place Matting Tape 130	<ul style="list-style-type: none"> <li>Designed to keep mats in place on finished hard surface floors</li> <li>Features a double-sided tape with a strong adhesive on one side that sticks to the mat backing, plus a low-tack, adhesive on the opposite side to keep the mat in place</li> <li>Repositionable for moving or cleaning</li> </ul>	2" x 100' Roll	TAPE130 TAPE
3M™ Stay-in-Place Matting Tape 140	<ul style="list-style-type: none"> <li>Designed to keep mats in place on looped-pile carpeted surfaces</li> <li>Features Scotchmate™ Hook Fasteners that intertwine with looped carpet fibers to keep the mat in place</li> <li>Repositionable for moving or cleaning</li> </ul>	2" x 100' Roll	TAPE140 TAPE
3M™ Matting Seaming Tape	Brown vinyl tape to bridge and bond mat sides and ends together. Use with 3M™ Matting Adhesive	2" x 100' Roll	MS3MTAPBR

# Aluminum Framing


Mats Inc. offers a comprehensive line of aluminum frames and transitions for all of our products to ensure smooth transitions and trouble-free installations. Frames are sold in full lengths as listed below or in 1' increments and should be cut to the appropriate size and mitered on-site to ensure proper fit.

PRODUCT	TYPE	SIZE	ITEM#
"J" Frame	Recessed/Surface Mount	5/8" x lengths to 20'	ALJFRLP
"L" Frame	Recessed	7/16" x lengths to 12'	ALLFR
"R" Frame	Recessed/Surface Mount	7/16" x lengths to 12'	ALRFRLP
"T" Section Divider	Recessed/Surface Mount	5/16" x lengths to 10'	ALT38
Ramp Frame	Surface Mount	3/8" x lengths to 12'	ALRMP3
Overlap Ramp Frame	Surface Mount	7/16" x 2-3/4" x lengths to 10'	ALSMR2
"Z" Frame	Recessed/Surface Mount	3/8" x lengths to 12'	WALZFR12

**Note**

Many Aluminum Foot Grilles are supplied with frame systems fabricated specifically for the product type and installation method. These frames are shipped with the Foot Grilles. Additional frames are not required. Consult our Product Specialists for details.



"J" Frame




"L" Frame




"R" Frame




"T" Section Divider




"Z" Frame



Ramp Frame




Overlap Ramp Frame



# Nosing, Transitions & Levelers


Many of our matting Roll Goods and Walk-Off Mats & Runners may be cut to custom sizes and have vinyl nosing applied to one, two, or all four sides of the mat to provide smooth transitions for loose-laid applications. Consult the specifications of each product for the appropriate nosing or nosing options for your mat, or contact one of our Product Specialists for assistance.

Nosing				
PRODUCT	DESCRIPTION	SIZE	COLOR(S)	ITEM#
Standard	Glue on/Sew on	3/16" x 2-7/16" x 50' (exposed width is 1-1/4") LOOSE up to 50 feet	Black (BK) Brown (BR)	NOSWON XX
Low Profile	Sew on	1/4" x 2-11/16" x 80' (exposed width is 1-1/2") LOOSE up to 80 feet	Black	LOPROFI BK
Premium "Ultra-Flex" Nosing	Sew on	5/16" x 3-5/16" x 50' (exposed width is 1-7/8") LOOSE up to 50 feet	Black (BK) Brown (BR)	NOFLEX XX
Transitions				
PRODUCT	DESCRIPTION	SIZE	COLOR	ITEM#
Ramp-Flex PVC Ramp	For use with modular tiles with heights from 5/16" to 7/16"	12' lengths (full lengths only)	Black	ALCRS BK
Trans-Ramp	For use with modular tiles with heights from 5/16" to 7/16"	12' lengths (full lengths only)	Black	WAL PVC RMP 2
Levelers				
PRODUCT	DESCRIPTION	SIZE	COLOR	ITEM#
Level-Flex Leveling Strip (1/8")	Use to shim material of uneven heights	1/8" x 100'	Black	NOLEV18 BK
Level-Flex Leveling Strip (1/4")	Use to shim material of uneven heights	1/4" x 4'	Black	NOLEV14 BK

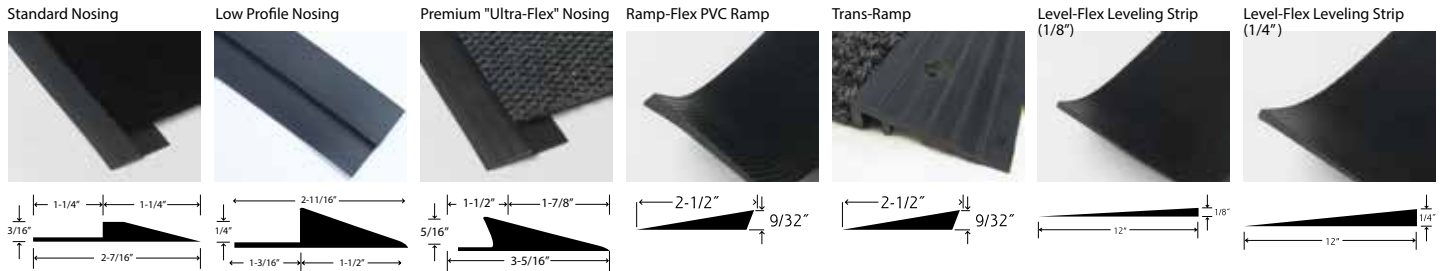

## Mats Inc. Carpet Matting and 3M™ Nomad™ Matting Nosing Options

Please contact us at 1-800-628-7462 to request a brochure.

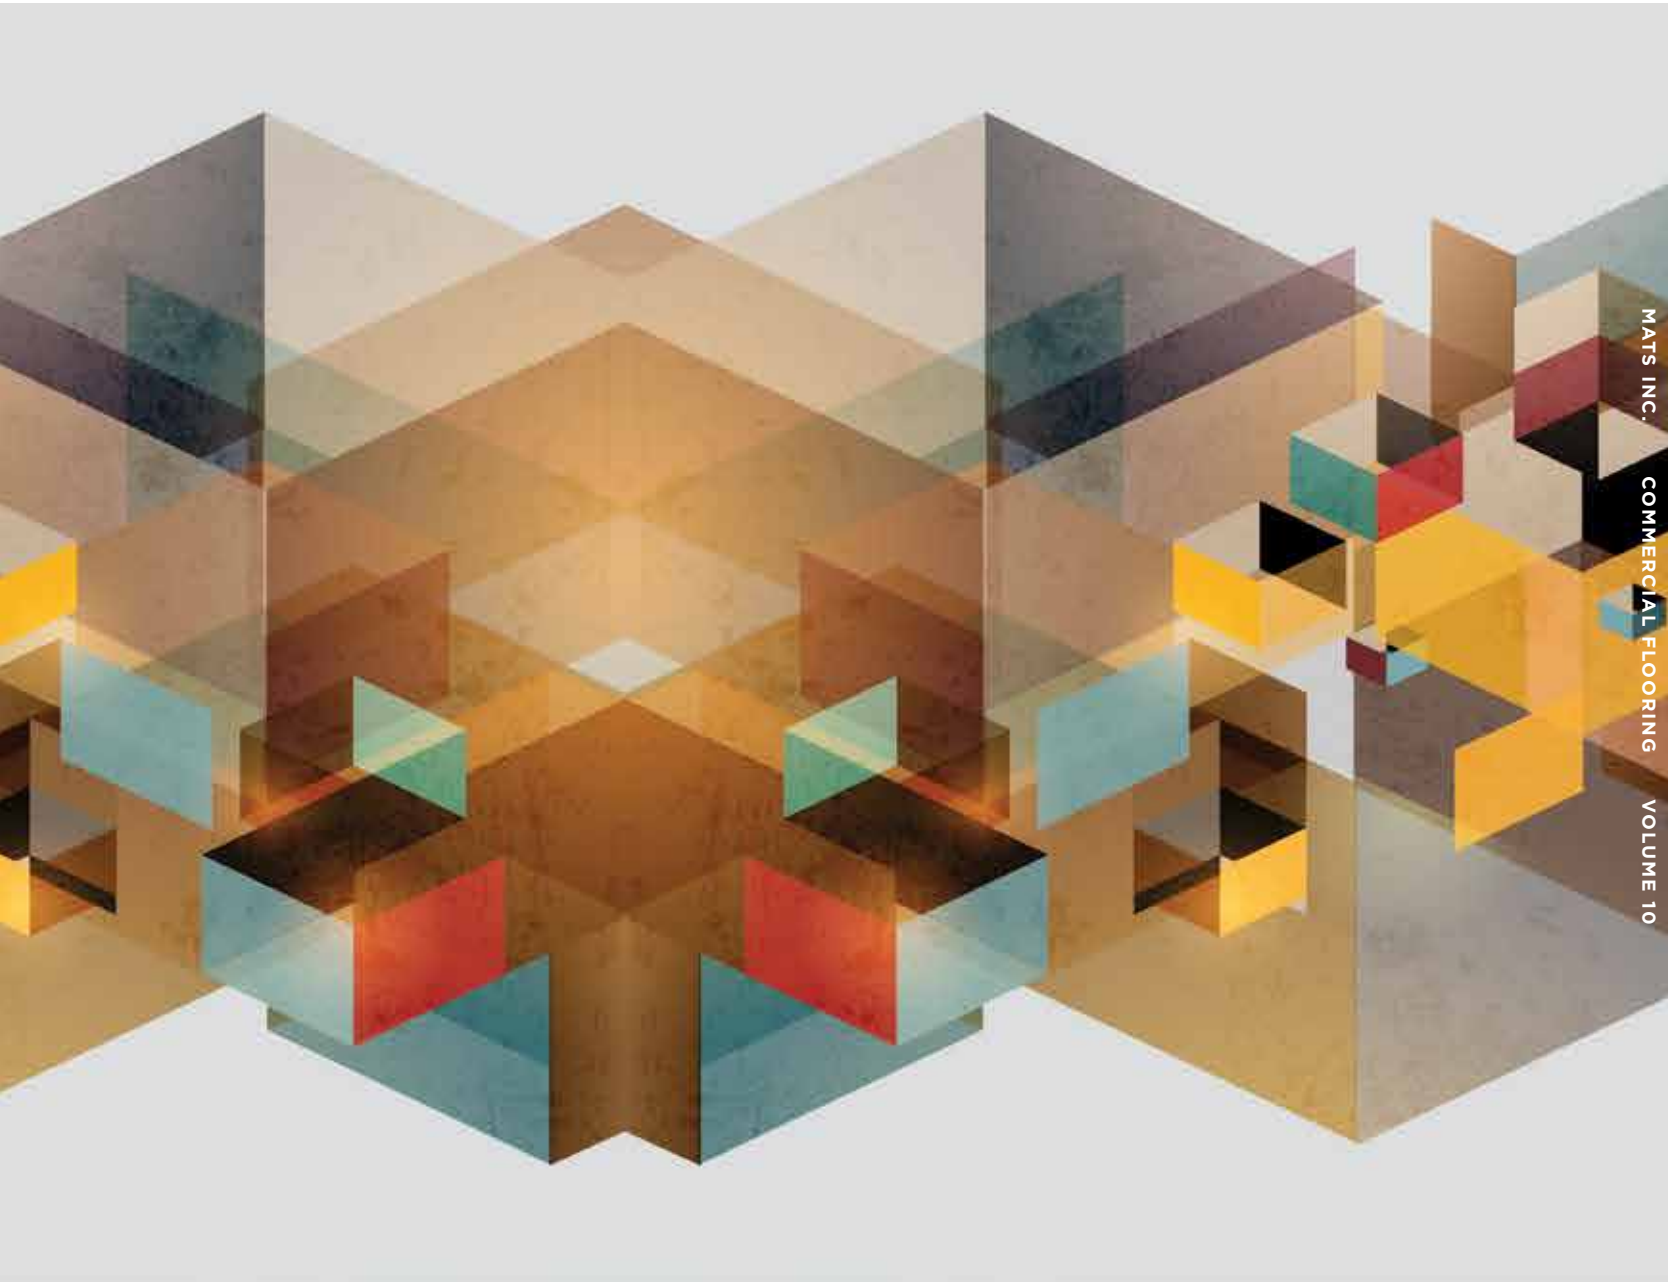

**matsinc.**<sup>®</sup>  
Every step of the way

179 Campanelli Parkway  
Stoughton, MA 02072  
800-MATS-INC (800-628-7462)  
781-344-1537 fax  
www.matsinc.com



CleanZone, Design Print, miVantage and the Mats Inc. logo are trademarks of Mats Inc.  
3M, Nomad, Safety-Walk and Scotchmate are trademarks of 3M. Used under license in Canada.

© 2014 Mats Inc. All rights reserved.